

---

---

**Information technology — Radio  
frequency identification device  
conformance test methods —**

**Part 3:  
Test methods for air interface  
communications at 13,56 MHz**

*Technologies de l'information — Méthodes d'essai de conformité du  
dispositif d'identification de radiofréquence —*

*Partie 3: Méthodes d'essai pour des communications d'une interface  
d'air à 13,56 MHz*

IECNORM.COM : Click to view the full PDF of ISO/IEC TR 18047-3:2011



**COPYRIGHT PROTECTED DOCUMENT**

© ISO/IEC 2011

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

|                                                                                                                                     |           |
|-------------------------------------------------------------------------------------------------------------------------------------|-----------|
| Foreword .....                                                                                                                      | iv        |
| Introduction.....                                                                                                                   | v         |
| <b>1 Scope .....</b>                                                                                                                | <b>1</b>  |
| <b>2 Normative references .....</b>                                                                                                 | <b>1</b>  |
| <b>3 Terms and definitions .....</b>                                                                                                | <b>2</b>  |
| <b>4 Symbols and abbreviated terms .....</b>                                                                                        | <b>2</b>  |
| <b>5 Conformance tests for ISO/IEC 18000-3 — 13,56 MHz .....</b>                                                                    | <b>3</b>  |
| 5.1 General .....                                                                                                                   | 3         |
| 5.2 Default conditions applicable to the test methods .....                                                                         | 3         |
| 5.2.1 Test environment.....                                                                                                         | 3         |
| 5.2.2 Pre-conditioning .....                                                                                                        | 3         |
| 5.2.3 Default tolerance .....                                                                                                       | 3         |
| 5.2.4 Spurious inductance .....                                                                                                     | 3         |
| 5.2.5 Total measurement uncertainty .....                                                                                           | 3         |
| 5.3 Conformance tests for ISO/IEC 18000-3 Mode 1 .....                                                                              | 3         |
| 5.3.1 General .....                                                                                                                 | 3         |
| 5.3.2 Test apparatus and test circuits .....                                                                                        | 3         |
| 5.3.3 Functional test – tag.....                                                                                                    | 7         |
| 5.3.4 Functional test — interrogator.....                                                                                           | 8         |
| 5.4 Conformance tests for ISO/IEC 18000-3 Mode 2.....                                                                               | 10        |
| 5.4.1 General .....                                                                                                                 | 10        |
| 5.4.2 Test apparatus and test circuits .....                                                                                        | 10        |
| 5.4.3 Functional test – tag.....                                                                                                    | 11        |
| 5.4.4 Functional test – interrogator.....                                                                                           | 12        |
| 5.5 Conformance tests for ISO/IEC 18000-3 Mode 3 (mandatory ASK part).....                                                          | 13        |
| 5.5.1 General .....                                                                                                                 | 13        |
| 5.5.2 Test apparatus and test circuits .....                                                                                        | 13        |
| 5.5.3 Functional test – tag .....                                                                                                   | 17        |
| 5.5.4 Functional test — interrogator .....                                                                                          | 18        |
| <b>Annex A (normative) Test setup parameters and dimensions for tags smaller than or equal to an ISO/IEC 7810 ID-1 outline.....</b> | <b>20</b> |
| <b>Annex B (normative) Guideline for RFID tags larger than ISO/IEC 7810 ID-1 size.....</b>                                          | <b>23</b> |
| <b>Annex C (normative) Test interrogator antenna .....</b>                                                                          | <b>27</b> |
| <b>Annex D (informative) Test interrogator antenna tuning .....</b>                                                                 | <b>30</b> |
| <b>Annex E (normative) Sense coil .....</b>                                                                                         | <b>32</b> |
| <b>Annex F (normative) Reference tag for interrogator power test.....</b>                                                           | <b>34</b> |
| <b>Annex G (informative) Reference tag for load modulation test.....</b>                                                            | <b>36</b> |
| <b>Annex H (informative) Program for evaluation of the spectrum .....</b>                                                           | <b>37</b> |
| <b>Bibliography.....</b>                                                                                                            | <b>41</b> |

## Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

In exceptional circumstances, when the joint technical committee has collected data of a different kind from that which is normally published as an International Standard ("state of the art", for example), it may decide to publish a Technical Report. A Technical Report is entirely informative in nature and shall be reviewed every five years in the same manner as an International Standard.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

ISO/IEC TR 18047-3, was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 31, *Automatic identification and data capture techniques*.

This second edition cancels and replaces the first edition (ISO/IEC TR 18047-3:2004), which has been technically revised. It also incorporates the Technical Corrigendum ISO/IEC TR 18047-3:2004/Cor.1:2007.

ISO/IEC TR 18047 consists of the following parts, under the general title *Information technology — Radio frequency identification device conformance test methods*:

- *Part 2: Test methods for air interface communications below 135 kHz*
- *Part 3: Test methods for air interface communications at 13,56 MHz*
- *Part 4: Test methods for air interface communications at 2,45 GHz*
- *Part 6: Test methods for air interface communications at 860 MHz to 960 MHz*
- *Part 7: Test methods for active air interface communications at 433 MHz*

## Introduction

ISO/IEC 18000 defines the air interfaces for radio frequency identification (RFID) devices used in item management applications. ISO/IEC 18000-3 defines the air interface for these devices operating in the 13,56 MHz Industrial, Scientific, and Medical (ISM) band and used in these applications.

The purpose of ISO/IEC TR 18047 is to provide test methods for conformance with the various parts of ISO/IEC 18000.

Each part of ISO/IEC TR 18047 contains all measurements required to be made on a product in order to establish whether it conforms to the corresponding part of ISO/IEC 18000. For ISO/IEC TR 18047-3, each product needs to be assessed following either the procedure defined for Mode 1, for Mode 2 or for Mode 3.

IECNORM.COM : Click to view the full PDF of ISO/IEC TR 18047-3:2011

IECNORM.COM : Click to view the full PDF of ISO/IEC TR 18047-3:2017

# Information technology — Radio frequency identification device conformance test methods —

## Part 3: Test methods for air interface communications at 13,56 MHz

### 1 Scope

This part of ISO/IEC TR 18047 defines test methods for determining the conformance of radio frequency identification devices (tags and interrogators) for item management with the specifications given in ISO/IEC 18000-3, but does not apply to the testing of conformity with regulatory or similar requirements.

The test methods require only that the mandatory functions, and any optional functions which are implemented, be verified. This can, in appropriate circumstances, be supplemented by further, application-specific functionality criteria that are not available in the general case.

This part of ISO/IEC TR 18047 includes the following interrogator and tag conformance parameters:

- mode-specific conformance parameters including nominal values and tolerances;
- parameters that apply directly affecting system functionality and inter-operability.

This part of ISO/IEC TR 18047 does not include the following:

- parameters that are already included in regulatory test requirements;
- high-level data encoding conformance test parameters (these are specified in ISO/IEC 15962).

Clause 5 describes all necessary conformance tests, while 5.3 applies to Mode 1 products only, 5.4 applies to Mode 2 products only and 5.5 applies to Mode 3 (mandatory ASK part) only.

### 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 7810, *Identification cards — Physical characteristics*

ISO/IEC 18000-1, *Information technology — Radio frequency identification for item management — Part 1: Reference architecture and definition of parameters to be standardized*

ISO/IEC 18000-3, *Information technology — Radio frequency identification for item management — Part 3: Parameters for air interface communications at 13,56 MHz*

ISO/IEC 19762 (all parts), *Information technology — Automatic identification and data capture (AIDC) techniques — Harmonized vocabulary*

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 19762 (all parts) apply.

### 4 Symbols and abbreviated terms

|            |                                                            |
|------------|------------------------------------------------------------|
| <i>ar</i>  | reference tag width                                        |
| <i>asp</i> | air spacing                                                |
| <i>br</i>  | reference tag height                                       |
| <i>ca</i>  | calibration coil width                                     |
| <i>cb</i>  | calibration coil height                                    |
| <i>co</i>  | calibration coil corner radius                             |
| <i>dis</i> | distance between test interrogator antenna and sense coils |
| DUT        | device under test                                          |
| <i>fc</i>  | frequency of the operating field                           |
| <i>fs</i>  | frequency of sub-carrier                                   |
| $H_{max}$  | maximum field strength of the interrogator antenna field   |
| $H_{min}$  | minimum field strength of the interrogator antenna field   |
| <i>lx</i>  | length of test interrogator assembly connection cable      |
| <i>lya</i> | test interrogator and sense coil PCB width                 |
| <i>lyb</i> | test interrogator and sense coil PCB height                |
| <i>lyd</i> | test interrogator coil diameter                            |
| <i>lyw</i> | test interrogator coil track width                         |
| <i>nr</i>  | number of turns of reference tag                           |
| <i>oa</i>  | calibration coil outline width                             |
| <i>ob</i>  | calibration coil outline height                            |
| PCB        | printed circuit board                                      |
| <i>rs</i>  | sense coil corner radius                                   |
| <i>sa</i>  | sense coil width                                           |
| <i>sb</i>  | sense coil height                                          |
| <i>sr</i>  | reference tag track spacing                                |
| <i>wr</i>  | reference tag track width                                  |



## 5 Conformance tests for ISO/IEC 18000-3 — 13,56 MHz

### 5.1 General

This part of ISO/IEC TR 18047 specifies a series of tests to determine the conformance of interrogators and tags. The results of these tests shall be compared with the values of the parameters specified in ISO/IEC 18000-3 to determine whether the interrogator-under-test or tag-under-test conforms.

Unless otherwise specified, the tests in this part of ISO/IEC TR 18047 shall be applied exclusively to RFID tags and interrogators defined in ISO/IEC 18000-3 Mode 1, Mode 2 and Mode 3.

### 5.2 Default conditions applicable to the test methods

#### 5.2.1 Test environment

Unless otherwise specified, testing shall take place in an environment of temperature  $23\text{ °C} \pm 3\text{ °C}$  ( $73\text{ °F} \pm 5\text{ °F}$ ) and of relative humidity 40 % to 60 %.

#### 5.2.2 Pre-conditioning

Where pre-conditioning is required by the test method, the identification tags to be tested shall be conditioned to the test environment for a period of 24 h before testing.

#### 5.2.3 Default tolerance

Unless otherwise specified, a default tolerance of  $\pm 5\%$  shall be applied to the quantity values given to specify the characteristics of the test equipment (e.g. linear dimensions) and the test method procedures (e.g. test equipment adjustments).

#### 5.2.4 Spurious inductance

Resistors and capacitors should have negligible inductance.

#### 5.2.5 Total measurement uncertainty

The total measurement uncertainty for each quantity determined by these test methods shall be stated in the test report.

NOTE Basic information is given in ISO/IEC Guide 98-3:2008.

## 5.3 Conformance tests for ISO/IEC 18000-3 Mode 1

### 5.3.1 General

The conformance tests for ISO/IEC 18000-3 mode 1 are described independent of the tag size. For tests of tags smaller or equal to ID-1 (as defined in ISO/IEC 7810) all dimensions are specified in Annex A, while Annex B applies to larger tags.

### 5.3.2 Test apparatus and test circuits

This clause defines the test apparatus and test circuits for verifying the operation of a tag or an interrogator according to the base standard, ISO/IEC 18000-3. The test apparatus includes:

- Calibration coil (see 5.3.2.1)
- Test interrogator assembly (see 5.3.2.2)

- Reference tag (see 5.3.2.4)
- Digital sampling oscilloscope (see 5.3.2.5).

These are described in the following clauses.

### 5.3.2.1 Calibration coil

This clause defines the size, thickness and characteristics of the calibration coil PCB.

#### 5.3.2.1.1 Size of the Calibration coil

The calibration coil PCB consists of an area, which has the height and width defined in Figure 1 — Example calibration coil containing a single turn coil concentric with the tag outline.

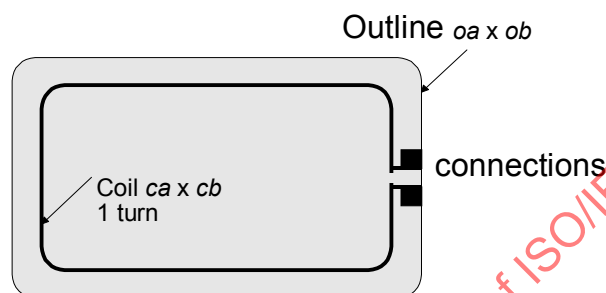


Figure 1 — Example calibration coil

#### 5.3.2.1.2 Thickness and material of the calibration coil substrate

The thickness of the calibration coil PCB shall be 0,76 mm +/- 10 %. It shall be constructed of a suitable insulating material such as FR4 or equivalent.

#### 5.3.2.1.3 Coil characteristics

The coil on the calibration coil PCB shall have one turn. The outer size of the coil shall be as defined in Figure 1 — Example calibration coil with a corner radius  $c_o$ .


The coil is made as a printed coil on PCB plated with 35  $\mu$ m copper. Track width shall be 500  $\mu$ m +/- 20 %. The size of the connection pads shall be 1,5 mm x 1,5 mm.

A high impedance oscilloscope probe (e.g. >1 M $\Omega$ , <14 pF) shall be used to measure the open circuit voltage in the coil. The resonant frequency of the whole set (calibration coil, connecting leads and probe) shall be above 60 MHz.

### 5.3.2.2 Test interrogator assembly

The test interrogator assembly for load modulation consists of an interrogator antenna and two parallel sense coils: sense coil A and sense coil B. The test set-up is shown in Figure 2 — Example test set-up. The sense coils are connected such that the signal from one coil is in opposite phase to the other. The 50  $\Omega$  potentiometer P1 serves to fine adjust the balance point when the sense coils are not loaded by a tag or any magnetically coupled circuit. The capacitive load of the probe including its parasitic capacitance shall be less than 14 pF.

IMPORTANT The capacitance of the connections and oscilloscope probe should be kept to a minimum for reproducibility.

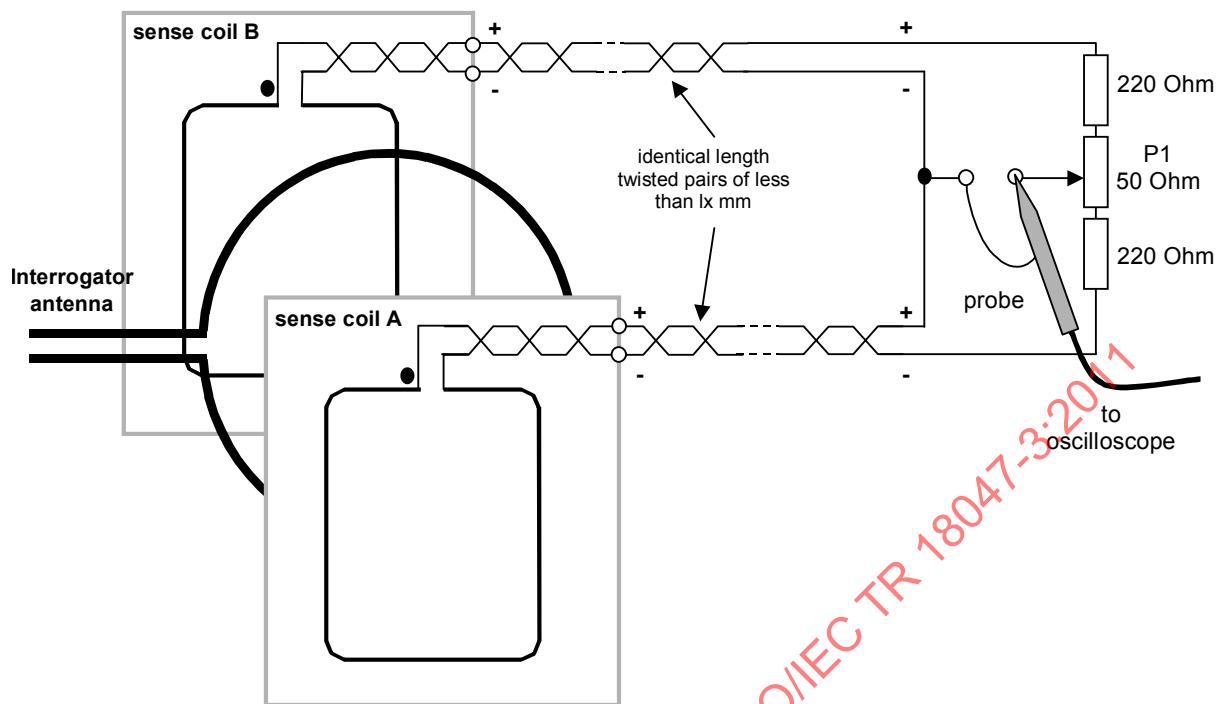

NOTE The values for the parameters are listed in Table A.2 — Definition of test interrogator for ID-1 or smaller.

**Figure 2 — Example test set-up**

#### 5.3.2.2.1 Test interrogator antenna


The test interrogator antenna shall have a diameter and a construction conforming to the drawings in Annex C. The tuning of the antenna may be accomplished with the procedure given in Annex D.

#### 5.3.2.2.2 Sense coils

The size and the sense coil construction shall conform to the drawings in Annex E.

#### 5.3.2.3 Assembly of test interrogator

The sense coils and test interrogator antenna shall be assembled parallel to each other. The sense and antenna coils shall be coaxial and the distance between the active conductors shall be as defined in Figure 3 — Test interrogator assembly. The distance between the coil in the DUT and the coil of the test interrogator antenna shall be equal to the distance between the calibration coil and the coil of the test interrogator antenna.

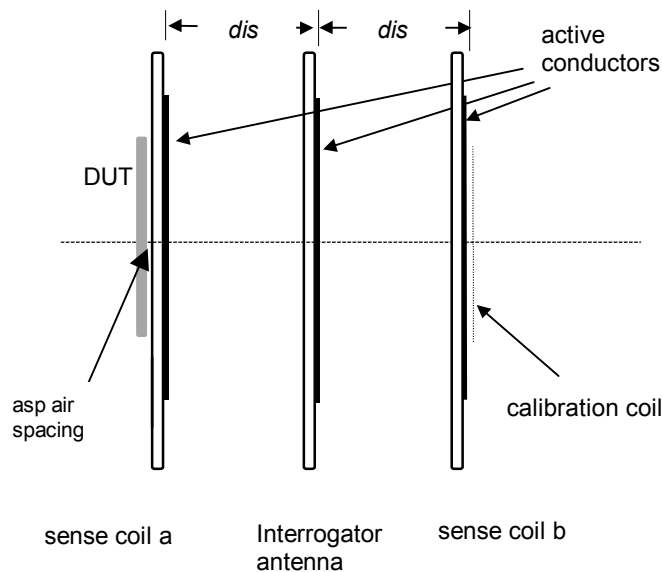

NOTE 1 The asp air spacing avoids parasitic effects such as detuning by closer spacing or ambiguous results due to noise and other environmental effects.

NOTE 2 The values for the parameters are listed in Table A.2 — Definition of test interrogator for ID-1 or smaller.

**Figure 3 — Test interrogator assembly**

#### 5.3.2.4 Reference tags

Reference tags are defined

- to test  $H_{\min}$  and  $H_{\max}$  produced by an interrogator (under conditions of loading by a tag) and thus to test the ability of an interrogator to power a tag
- to generate the minimum tag reply load modulation signal.

##### 5.3.2.4.1 Reference tag for interrogator power

The schematic for the power test is shown in Annex F. Power dissipation can be set by the resistor R1 or R2, in order to measure  $H_{\min}$  and  $H_{\max}$  respectively as defined in clause 5.3.4.1.2. The resonant frequency can be adjusted with C2.

##### 5.3.2.4.2 Reference tag for load modulation reception test

A suggested schematic for the load modulation reception test is shown in Annex G. The load modulation can be chosen to be resistive or reactive.

This reference tag is calibrated by using the test interrogator assembly as follows:

The reference tag is placed in the position of the DUT. The load modulation signal amplitude is measured as described in clause 5.3.3. This amplitude should correspond to the minimum amplitude at all values of field strength required by the base standard, ISO/IEC 18000-3.

##### 5.3.2.4.3 Dimensions of the reference tags

The reference tag which is used for the measurements has to be described in the measurement report. Figure 4 — Example of an ISO card sized reference tag shows as an example an ISO card sized reference tag which consists of an area containing a coil which has the same height and width as those defined in ISO/IEC 7810 for ID-1 type.

An area external to this, containing the circuitry that emulates the required tag functions, is appended so as to allow insertion into the test set-ups described below and so as to cause no interference to the tests.

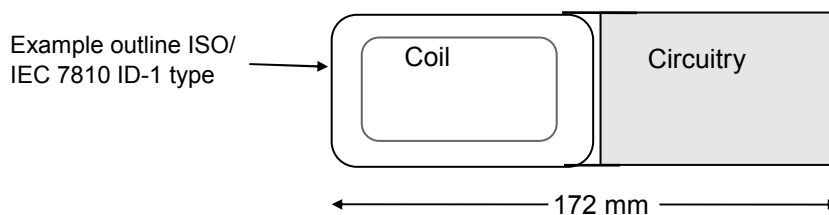


Figure 4 — Example of an ISO card sized reference tag

#### 5.3.2.4.4 Thickness of the reference tag board

The thickness of the reference tag active area shall be 0,76 mm +/- 10 %.

#### 5.3.2.4.5 Coil characteristics

The coil in the active area of the reference tag shall have  $nr$  turns and shall be concentric with the area outline.

The outer size of the coils shall be  $ar \times br$ .

The coil is printed on PCB plated with 35  $\mu$ m copper.

Track width shall be  $wr$  and spacing shall be  $sr$ .

NOTE The values for the parameters are listed in Table A.3.

#### 5.3.2.5 Digital sampling oscilloscope

The digital sampling oscilloscope shall be capable of sampling at a rate of at least 100 million samples per second with a resolution of at least 8 bits at optimum scaling. The oscilloscope should have the capability to output the sampled data as a text file to facilitate mathematical and other operations such as windowing on the sampled data using external software programs. An example of the program is shown in Annex H.

### 5.3.3 Functional test — tag

#### 5.3.3.1 Purpose

The purpose of this test is to determine the amplitude of the tag load modulation signal within the operating field range  $[H_{min}, H_{max}]$  as specified in the base standard, ISO/IEC 18000-3 and the functionality of the tag with the modulation under emitted fields as defined in ISO/IEC 18000-3 parameter table for tag to interrogator link (reference M1-Tag:7).

#### 5.3.3.2 Test procedure

Step 1: The load modulation test circuit of Figure 2 — Example test set-up and the test interrogator assembly of Figure 3 — Test interrogator assembly are used.

The RF power delivered by the signal generator to the test interrogator antenna shall be adjusted to produce the required field strength ( $H_{min}$  and  $H_{max}$ ) and modulation waveforms defined in ISO/IEC 18000-3 as measured by the calibration coil without any tag. The output of the load modulation test circuit of Figure 2 — Example test set-up is connected to a digital sampling oscilloscope. The 50  $\Omega$  potentiometer P1 shall be trimmed to minimize the residual carrier. This signal shall be at least 40 dB lower than the signal obtained by shorting one sense coil.

Step 2: The tag under test shall be placed in the DUT position, concentric with sense coil A. The RF drive into the test interrogator antenna shall be re-adjusted to the required field strength.

**IMPORTANT** Care should be taken to apply a proper synchronization method for low amplitude load modulation.

Exactly two sub-carrier cycles of the sampled modulation waveform shall be Fourier transformed. A discrete Fourier transformation with a scaling such that a pure sinusoidal signal results in its peak magnitude shall be used. To minimize transient effects, a sub-carrier cycle immediately following a non-modulating period must be avoided. In case of two sub-carrier frequencies this procedure shall be repeated for the second sub-carrier frequency.

The resulting amplitudes of the upper sideband(s) at  $f_c + f_{s1}$  (and  $f_c + f_{s2}$  if both are present) and the lower sideband(s) at  $f_c - f_{s1}$  (and  $f_c - f_{s2}$ , if present) respectively shall be above the value defined in the base standard, ISO/IEC 18000-3.

An appropriate command sequence as defined in the base standard, ISO/IEC 18000-3 shall be sent by the test interrogator to obtain a signal or load modulation response from the tag.

### 5.3.3.3 Test report

The test report shall give the measured amplitudes of the upper sideband(s) at  $f_c + f_{s1}$  (and  $f_c + f_{s2}$ , if present) and the lower sideband(s) at  $f_c - f_{s1}$  (and  $f_c - f_{s2}$ , if present) and the applied fields and modulations. The pass/fail condition is determined by the values defined in ISO/IEC 18000-3 parameter table for tag to interrogator link (reference M1-Tag:7).

### 5.3.4 Functional test — interrogator

#### 5.3.4.1 Interrogator field strength and power transfer

##### 5.3.4.1.1 Purpose

This test measures the field strength produced by an interrogator with its specified antenna in its operating volume as defined in accordance with the base standard, ISO/IEC 18000-3. The test procedure of clause 5.3.4.1.2 is also used to determine that the interrogator with its specified antenna generates a field not higher than the value specified in ISO/IEC 18000-3 parameter table for interrogator to tag link (reference M1-Int:3 for  $H_{max}$  and reference M1-Int:3a for  $H_{min}$ ).

This test uses a reference tag as defined in Annex F to determine that a specific interrogator to be tested is able to supply a certain power to a tag placed anywhere within the defined operating volume.

##### 5.3.4.1.2 Test procedure

Procedure for  $H_{max}$  test:

- 1) Tune the reference tag to 13,56 MHz.

**NOTE** The resonant frequency of the reference tag is measured by using an impedance analyzer or a LCR-meter connected to a calibration coil. The coil of the reference tag should be placed at a distance of 10 mm from the calibration coil, with the axes of the two coils being congruent. The resonant frequency is that frequency at which the resistive part of the measured complex impedance is at maximum.

- 2) Set Jumper J1 to position b to activate R2.
- 3) Sweep the reference tag coaxially with the antenna through the defined operating volume of the interrogator under test at a maximum rate of 1 cm/s.
- 4) The DC voltage ( $V_{DC}$ ) across resistor R3 (Annex F) is measured with a high impedance voltmeter and shall not exceed 3 V where the load resistor parallel to the coil L is set to R2 and the field strength equals  $H_{max}$ .

Procedure for  $H_{\min}$  test:

- 1) Tune the reference tag to 13,56 MHz.
- 2) Set Jumper J1 to position a to activate R1.
- 3) Sweep the reference tag coaxially with the antenna through the defined operating volume of the interrogator under test at a maximum rate of 1 cm/s.
- 4) The DC voltage ( $V_{DC}$ ) across resistor R3 is measured with a high impedance voltmeter and shall exceed 3 V where the load resistor parallel to the coil L is set to R1 and the field strength equals  $H_{\min}$ .

#### 5.3.4.1.3 Test report

The test report shall give the measured values for  $V_{DC}$  at  $H_{\min}$  and  $H_{\max}$  under the defined conditions. The pass/fail condition is determined by the values defined in ISO/IEC 18000-3 parameter table for interrogator to tag link (reference M1-Int:3 for  $H_{\max}$  and reference M1-Int:3a for  $H_{\min}$ ).

#### 5.3.4.2 Modulation index and waveform

##### 5.3.4.2.1 Purpose

This test is used to determine the index of modulation of the interrogator field as well as the rise and fall times and the overshoot values as defined in ISO/IEC 18000-3 M1-Int:7d parameter table for interrogator to tag link (reference M1-Int:7, reference M1-Int:7d, figure M1-1 and figure M1-2) within the defined operating volume.

##### 5.3.4.2.2 Test procedure

The calibration coil is positioned anywhere within the defined operating volume, and the modulation index and waveform characteristics are determined from the induced voltage on the coil displayed on a suitable oscilloscope.

##### 5.3.4.2.3 Test report

The test report shall give the measured modulation index of the interrogator field, the rise and fall times and the overshoot values within the defined operating volume. The pass/fail condition is determined by the values defined in ISO/IEC 18000-3 parameter table for interrogator to tag link (reference M1-Int:7, reference M1-Int:7d, figure M1-1 and figure M1-2).

#### 5.3.4.3 Load modulation reception (informative only)

This is an indirect test of the ability of the interrogator to receive a minimum signal from the tag. This test verifies that an interrogator correctly detects the load modulation of a tag that conforms to the base standard, ISO/IEC 18000-3. It is supposed that the interrogator has means to indicate correct reception of the sub-carrier(s) produced by a test tag.

Annex G shows a circuit which can be used in conjunction with the test apparatus to determine the sensitivity of an interrogator to load modulation within the defined operating volume.

The pass/fail condition is determined by the values defined in ISO/IEC 18000-3 parameter table for tag to interrogator link (reference M1-Tag:7). Failure under this criterion shall not be interpreted as failure of conformance for an otherwise conforming interrogator.

## 5.4 Conformance tests for ISO/IEC 18000-3 Mode 2

### 5.4.1 General

The conformance tests for ISO/IEC 18000-3 Mode 2 are described independent of the tag size. For tests of tags smaller than or equal to ID-1 all dimensions are specified in Annex A, while Annex B applies for all other cases.

The manufacturer shall specify the tag  $H_{max}$  and  $H_{min}$  and the minimum tag reply load modulation at  $H_{max}$  and  $H_{min}$ .

The tag reply load modulation is measured as described in 5.4.3.2.

### 5.4.2 Test apparatus and test circuits

This clause defines the test apparatus and test circuits for verifying the operation of a tag or an interrogator according to the base standard, ISO/IEC 18000-3. The test apparatus includes:

- Calibration coil
- Test interrogator assembly
- Reference tags

These are described in the following clauses.

#### 5.4.2.1 Calibration coil

See 5.3.2.1.

#### 5.4.2.2 Test interrogator assembly

See 5.3.2.2.

For ISO/IEC 18000-3 Mode 2 a resistance of  $85\ \Omega$  shall be connected across the output of the test interrogator measurement circuit in Figure 2 (between P1 and ground).

##### 5.4.2.2.1 Test interrogator antenna

See 5.3.2.2.1.

For ISO/IEC 18000-3 Mode 2 the impedance matching network in Figure C.3 — Impedance matching network shall be altered to be a tuning network. The components for the tuning network shall be:

- C1 selected and adjusted such that the test interrogator antenna is series resonant at 13,56 MHz.
- C2 to C4 omitted (open circuit)
- $R_{ext}$  zero (closed circuit)

For ISO/IEC 18000-3 Mode 2 the power driver, tuning network and test interrogator antenna shall provide the manufacturer specified field strengths ( $H_{max}$  and  $H_{min}$ ) and modulation as specified in the base standard, ISO/IEC 18000-3.

For ISO/IEC 18000-3 Mode 2 the power driver output impedance is not constrained to  $50\ \Omega$  and is not required to provide an adjustable range of modulation index for amplitude modulation.

**IMPORTANT** In order to avoid adverse effects on the measurement results due to reflection, the connection between the power driver and the test interrogator antenna should be kept as short as possible.



**5.4.2.2.2 Sense coils**

See 5.3.2.2.2.

**5.4.2.3 Assembly of test interrogator**

See 5.3.2.3.

**5.4.2.4 Reference tags**

Reference tags are defined:

- to test  $H_{\min}$  and  $H_{\max}$  produced by an interrogator (under conditions of loading by a tag) and thus to test the ability of an interrogator to power a tag
- to generate the minimum tag reply load modulation signal.

**5.4.2.4.1 Reference tag for interrogator power**

See 5.3.2.4.1.

This reference tag shall be calibrated in accordance with Annex B clause B.8.

**5.4.2.4.2 Reference tag for load modulation reception test**

See 5.3.2.4.2

For ISO/IEC 18000-3 Mode 2 the load modulation shall be resistive only.

For ISO/IEC 18000-3 Mode 2 the load switching signal shall be as per the base standard, ISO/IEC 18000-3.

This reference tag is calibrated using the procedure described in clause 5.4.3.2. Adjusting or modifying the value of Rmod1 and Rmod2 (see Annex G) sets the tag reply load modulation amplitude.

**5.4.2.4.3 Dimensions of the reference tags**

See 5.3.2.4.3.

**5.4.3 Functional test – tag****5.4.3.1 Purpose**

The purpose of this test is to determine the amplitude of the tag reply load modulation signal within the specified operating field strength range [ $H_{\min}$ ,  $H_{\max}$ ] and functionality of the tag with modulation under emitted fields as defined in the base standard, ISO/IEC 18000-3.

**5.4.3.2 Test procedure**

This test uses the test interrogator assembly (see 5.4.2.2).

The RF power delivered by the signal generator to the test interrogator antenna shall be adjusted to the required field strength and modulation waveforms (see 5.4.4.2) as measured by the calibration coil without any tag. The output of the load modulation test circuit of Figure 2 is connected to a digital sampling oscilloscope. The 50  $\Omega$  potentiometer P1 shall be trimmed to minimise the residual carrier. This signal shall be at least 40 dB lower than the signal obtained by shorting one sense coil.

The tag under test shall be placed in the DUT position, concentric with sense coil A. The RF drive into the test interrogator antenna shall be re-adjusted to the required field strength. The output of the load modulation test circuit shall then be connected via a coax cable to a 50  $\Omega$  input spectrum analyser.

An appropriate command sequence as defined in the base standard, ISO/IEC 18000-3 shall be sent by the interrogator to obtain a load modulation response from the tag. (When calibrating the reference tag (see 5.4.2.4.2) the load modulation is provided by applying the load switching signal.)

The resulting sidebands at the spectrum analyser shall be greater than or equal to the value for tag reply load modulation as specified by the manufacturer.

**IMPORTANT** The sensitivity of the test set up is affected by the settings of the spectrum analyzer and care must be taken to set the spectrum analyzer to maintain consistent test results.

#### **5.4.3.3 Test report**

The test report shall give the measured amplitudes of the sidebands and the applied fields and modulations for all sub-carriers.

#### **5.4.4 Functional test – interrogator**

##### **5.4.4.1 Interrogator field strength and power transfer**

###### **5.4.4.1.1 Purpose**

This test measures that the field strength produced by an interrogator with its specified antenna in its operating volume is no greater than a specified maximum value and no less than a specified minimum value, and therefore determines that the interrogator will correctly power a tag within the operating volume.

This test uses a reference tag (see 5.4.2.4.1).

###### **5.4.4.1.2 Test procedure**

See 5.3.4.1.3.

###### **5.4.4.1.3 Test report**

The test report shall give the measured values for  $V_{DC}$  at  $H_{min}$  and  $H_{max}$  under the defined conditions.

##### **5.4.4.2 Modulation phase shift waveform**

###### **5.4.4.2.1 Purpose**

This test is used to determine the phase shift waveform characteristics of the interrogator field as defined in the base standard, ISO/IEC 18000-3 within the defined operating volume.

###### **5.4.4.2.2 Test procedure**

The calibration coil (see 5.4.2.1) is positioned anywhere within the defined operating volume.

An unmodulated 13,56 MHz reference signal (synchronous with the 13,56 MHz interrogator clock) and the calibration coil output are both connected to a phase discriminator. The interrogator shall have means to provide such reference signal. The phase shift waveform characteristics are displayed on a suitable oscilloscope via the discriminator output.

###### **5.4.4.2.3 Test report**

The test report shall give the measured phase shift times.

#### 5.4.4.3 Load modulation reception (informative only)

This is an indirect test of the ability of the interrogator to receive a minimum signal from the tag. This test verifies that an interrogator correctly detects the reply load modulation of a tag, which conforms to the base standard, ISO/IEC 18000-3. It is supposed that the interrogator has means to indicate correct reception of the sub-carrier(s) produced by a test tag.

A reference tag (see 5.4.2.4.2) can be used in conjunction with the test apparatus defined in Annex G, which shows a circuit that can be used to determine the sensitivity of an interrogator to load modulation within the defined operating volume.

The pass/fail condition is determined by the values defined in ISO/IEC 18000-3 parameter table for tag to interrogator link (reference M2-Tag:7). Failure under this criterion shall not be interpreted as failure of conformance for an otherwise conforming interrogator.

### 5.5 Conformance tests for ISO/IEC 18000-3 Mode 3 (mandatory ASK part)

#### 5.5.1 General

The conformance tests for ISO/IEC 18000-3 mode 3 are described independent of the tag size. For tests of tags smaller or equal to ID-1 (as defined in ISO/IEC 7810) all dimensions are specified in Annex A, while Annex B applies to larger tags.

#### 5.5.2 Test apparatus and test circuits

This clause defines the test apparatus and test circuits for verifying the operation of a tag or an interrogator according to the base standard, ISO/IEC 18000-3. The test apparatus includes:

- Calibration coil (see 5.5.2.1)
- Test interrogator assembly (see 5.5.2.2)
- Reference tag (see 5.5.2.4)
- Digital sampling oscilloscope (see 5.5.2.5).

These are described in the following clauses.

##### 5.5.2.1 Calibration coil

This clause defines the size, thickness and characteristics of the calibration coil PCB.

##### 5.5.2.1.1 Size of the Calibration coil

The calibration coil PCB consists of an area, which has the height and width defined in Figure 5 containing a single turn coil concentric with the tag outline.

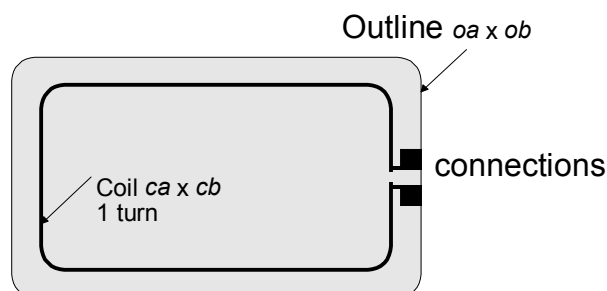


Figure 5 — Example calibration coil

### 5.5.2.1.2 Thickness and material of the calibration coil substrate

The thickness of the calibration coil PCB shall be 0,76 mm  $\pm$  10 %. It shall be constructed of a suitable insulating material such as FR4 or equivalent.

### 5.5.2.1.3 Coil characteristics

The coil on the calibration coil PCB shall have one turn. The outer size of the coil shall be as defined in Figure 5 with a corner radius  $r_0$ .

The coil is made as a printed coil on PCB plated with 35  $\mu$ m copper. Track width shall be 500  $\mu$ m  $\pm$  20 %. The size of the connection pads shall be 1,5 mm  $\times$  1,5 mm.

A high impedance oscilloscope probe (e.g.  $>1$  M $\Omega$ ,  $<14$  pF) shall be used to measure the open circuit voltage in the coil. The resonant frequency of the whole set (calibration coil, connecting leads and probe) shall be above 60 MHz.

### 5.5.2.2 Test interrogator assembly

The test interrogator assembly for load modulation consists of an interrogator antenna and two parallel sense coils: sense coil A and sense coil B. The test set-up is shown in Figure 6. The sense coils are connected such that the signal from one coil is in opposite phase to the other. The 50  $\Omega$  potentiometer P1 serves to fine adjust the balance point when the sense coils are not loaded by a tag or any magnetically coupled circuit. The capacitive load of the probe including its parasitic capacitance shall be less than 14 pF.

**IMPORTANT** The capacitance of the connections and oscilloscope probe should be kept to a minimum for reproducibility.

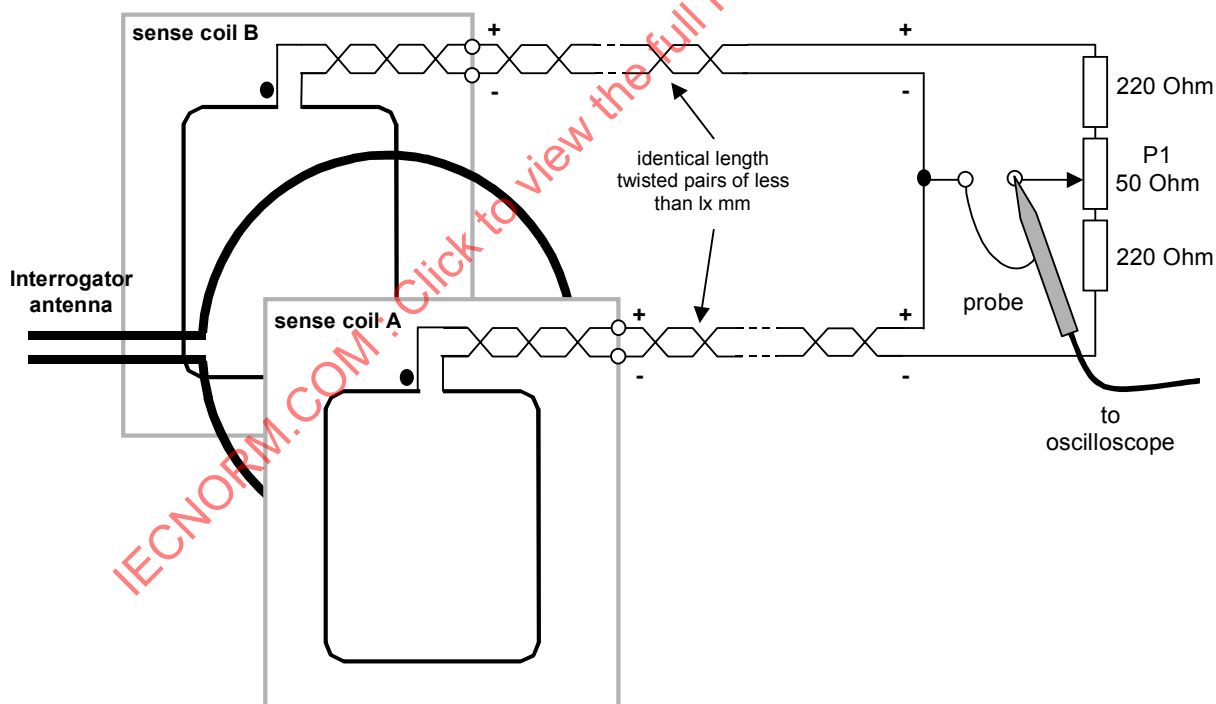


Figure 6 — Example test set-up

#### 5.5.2.2.1 Test interrogator antenna


The test interrogator antenna shall have a diameter and a construction conforming with the drawings in Annex C. The tuning of the antenna may be accomplished with the procedure given in Annex D.

#### 5.5.2.2.2 Sense coils

The size and the sense coil construction shall conform with the drawings in Annex E.

#### 5.5.2.3 Assembly of test interrogator

The sense coils and test interrogator antenna shall be assembled parallel to each other. The sense and antenna coils shall be coaxial and the distance between the active conductors shall be as defined in Figure 7 — Test interrogator assembly. The distance between the coil in the DUT and the coil of the test interrogator antenna shall be equal to the distance between the calibration coil and the coil of the test interrogator antenna.

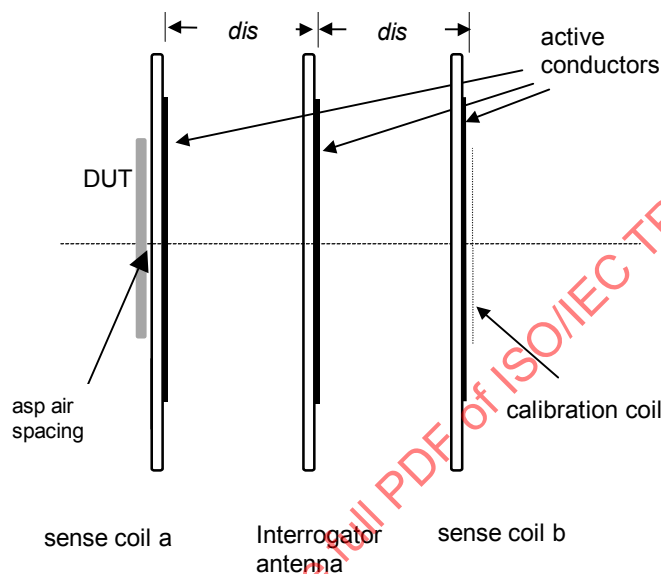

NOTE 1 The asp air spacing avoids parasitic effects such as detuning by closer spacing or ambiguous results due to noise and other environmental effects.

NOTE 2 The values for the parameters are listed in Table A.2 — Definition of test interrogator for ID-1 or smaller.

**Figure 7 — Test interrogator assembly**

#### 5.5.2.4 Reference tags

Reference tags are defined

- to test  $H_{\min}$  and  $H_{\max}$  produced by an interrogator (under conditions of loading by a tag) and thus to test the ability of an interrogator to power a tag
- to generate the minimum tag reply load modulation signal.

##### 5.5.2.4.1 Reference tag for interrogator power

The schematic for the power test is shown in Annex F. Power dissipation can be set by the resistor R1 or R2, in order to measure  $H_{\min}$  and  $H_{\max}$  respectively as defined in clause 5.5.4.1.2. The resonant frequency can be adjusted with C2.

#### 5.5.2.4.2 Reference tag for load modulation reception test

A suggested schematic for the load modulation reception test is shown in Annex G. The load modulation can be chosen to be resistive or reactive.

This reference tag is calibrated by using the test interrogator assembly as follows:

The reference tag is placed in the position of the DUT. The load modulation signal amplitude is measured as described in clause 5.5.3. This amplitude should correspond to the minimum amplitude given below for all field strength values between  $H_{\min}$  and  $H_{\max}$ .

The load modulation shall be at least 10mV for ISO card sized tags (ID1), for other label form factors the label manufacturer shall specify the minimum load modulation.

#### 5.5.2.4.3 Dimensions of the reference tags

The reference tag which is used for the measurements has to be described in the measurement report. Figure 8 shows as an example an ISO card sized reference tag which consists of an area containing a coil which has the same height and width as those defined in ISO/IEC 7810 for ID-1 type.

An area external to this, containing the circuitry that emulates the required tag functions, is appended so as to allow insertion into the test set-ups described below and so as to cause no interference to the tests.

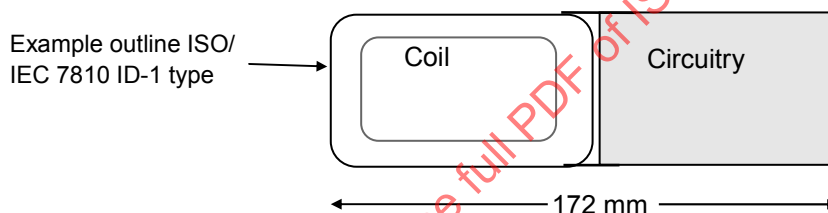


Figure 8 — Example of an ISO card sized reference tag

#### 5.5.2.4.4 Thickness of the reference tag board

The thickness of the reference tag active area shall be 0,76 mm +/- 10 %.

#### 5.5.2.4.5 Coil characteristics

The coil in the active area of the reference tag shall have  $nr$  turns and shall be concentric with the area outline.

The outer size of the coils shall be  $ar \times br$ .

The coil is printed on PCB plated with 35  $\mu$ m copper.

Track width shall be  $wr$  and spacing shall be  $sr$ .

#### 5.5.2.5 Digital sampling oscilloscope

The digital sampling oscilloscope shall be capable of sampling at a rate of at least 100 million samples per second with a resolution of at least 8 bits at optimum scaling. The oscilloscope should have the capability to output the sampled data as a text file to facilitate mathematical and other operations such as windowing on the sampled data using external software programmes. An example of the programme is shown in Annex H.

### 5.5.3 Functional test – tag

#### 5.5.3.1 Purpose

The purpose of this test is to determine the amplitude of the tag load modulation signal within the operating field range  $[H_{\min}, H_{\max}]$  as specified in the base standard, ISO/IEC 18000-3 and the functionality of the tag with the modulation under emitted fields as defined in ISO/IEC 18000-3 parameter table for tag to interrogator link (reference M3-Tag:7).

#### 5.5.3.2 Test procedure

Step 1: The load modulation test circuit of Figure 2 and the test interrogator assembly of Figure 7 are used.

The RF power delivered by the signal generator to the test interrogator antenna shall be adjusted to produce the required field strength ( $H_{\min}$  and  $H_{\max}$ ) and modulation waveforms defined in ISO/IEC 18000-3 mode 3 as measured by the calibration coil without any tag. The output of the load modulation test circuit of Figure 6 is connected to a digital sampling oscilloscope. The 50  $\Omega$  potentiometer P1 shall be trimmed to minimise the residual carrier. This signal shall be at least 40 dB lower than the signal obtained by shorting one sense coil.

Step 2: The tag under test shall be placed in the DUT position, concentric with sense coil A. The RF drive into the test interrogator antenna shall be re-adjusted to the required field strength.

**IMPORTANT** Care should be taken to apply a proper synchronization method for low amplitude load modulation.

The measurement shall be carried out for 4 sub-carrier pulse Manchester, 2 sub-carrier pulse Manchester, 8 sub-carrier pulse Miller am FM0 signalling for link frequencies of 423.75 kHz ( $f_c/32$ ) and 847.5 kHz ( $f_c/16$ ).

Exactly two sub-carrier cycles of the sampled modulation waveform shall be Fourier transformed. A discrete Fourier transformation with a scaling such that a pure sinusoidal signal results in its peak magnitude shall be used.

To minimize transient effects, in case of:

- Manchester coded sub-carrier signalling: a sub-carrier cycle immediately following a non modulation period shall be avoided;
- Miller coded sub-carrier signalling: a sub-carrier cycle immediately following a phase shift shall be avoided.

For FM0 signalling the measurement shall be carried out at a sequence of at least three logic “0” by using two logic “0” for the measurement and avoiding the first logic “0” of the total sequence.

The resulting amplitudes of the upper sideband(s) at  $f_c + f_s$  and the lower sideband(s) at  $f_c - f_s$  respectively shall be above 10mV for ISO card sized tags (ID1), for other label form factors the label manufacturer shall specify the minimum load modulation.

An appropriate command sequence as defined in the base standard, ISO/IEC 18000-3 mode 3 shall be sent by the test interrogator to obtain a signal or load modulation response from the tag.

#### 5.5.3.3 Test report

The test report shall give the measured amplitudes of the upper sideband at  $f_c + f_s$  and the lower sideband at  $f_c - f_s$  and the applied fields and modulations. The pass/fail condition is determined by the following condition:

The load modulation shall be at least 10mV for ISO card sized tags (ID1), for other label form factors the label manufacturer shall specify the minimum load modulation.

## 5.5.4 Functional test — interrogator

### 5.5.4.1 Interrogator field strength and power transfer

#### 5.5.4.1.1 Purpose

This test measures the field strength produced by an interrogator with its specified antenna in its operating volume as defined in accordance with the base standard, ISO/IEC 18000-3 mode 3. The test procedure of clause 5.5.4.1.2 is also used to determine that the interrogator with its specified antenna generates a field not higher than the value specified in ISO/IEC 18000-3 parameter table for interrogator to tag link (reference M3-Int:3 for  $H_{\max}$  and reference M3-Int:3a for  $H_{\min}$ ).

This test uses a reference tag as defined in Annex F to determine that a specific interrogator to be tested is able to supply a certain power to a tag placed anywhere within the defined operating volume.

#### 5.5.4.1.2 Test procedure

Procedure for  $H_{\max}$  test:

- 1) Tune the reference tag to 13,56 MHz.

NOTE The resonant frequency of the reference tag is measured by using an impedance analyser or a LCR-meter connected to a calibration coil. The coil of the reference tag should be placed at a distance of 10 mm from the calibration coil, with the axes of the two coils being congruent. The resonant frequency is that frequency at which the resistive part of the measured complex impedance is at maximum.

- 2) Set Jumper J1 to position b to activate R2.
- 3) Sweep the reference tag coaxially with the antenna through the defined operating volume of the interrogator under test at a maximum rate of 1 cm/s.
- 4) The DC voltage ( $V_{DC}$ ) across resistor R3 (Annex F) is measured with a high impedance voltmeter and shall not exceed 3 V where the load resistor parallel to the coil L is set to R2 and the field strength equals  $H_{\max}$ .

Procedure for  $H_{\min}$  test:

- 1) Tune the reference tag to 13,56 MHz.
- 2) Set Jumper J1 to position a to activate R1.
- 3) Sweep the reference tag coaxially with the antenna through the defined operating volume of the interrogator under test at a maximum rate of 1 cm/s.
- 4) The DC voltage ( $V_{DC}$ ) across resistor R3 is measured with a high impedance voltmeter and shall exceed 3 V where the load resistor parallel to the coil L is set to R1 and the field strength equals  $H_{\min}$ .

#### 5.5.4.1.3 Test report

The test report shall give the measured values for  $V_{DC}$  at  $H_{\min}$  and  $H_{\max}$  under the defined conditions. The pass/fail condition is determined by the values defined in ISO/IEC 18000-3 parameter table for interrogator to tag link (reference M3-Int:3 for  $H_{\max}$  and reference M3-Int:3a for  $H_{\min}$ ).

### 5.5.4.2 Modulation index and waveform

#### 5.5.4.2.1 Purpose

This test is used to determine the index of modulation of the interrogator field as well as the rise and fall times and the overshoot values as defined in ISO/IEC 18000-3 mode 3 within the defined operating volume.



#### 5.5.4.2.2 Test procedure

The calibration coil is positioned anywhere within the defined operating volume, and the modulation index and waveform characteristics are determined from the induced voltage on the coil displayed on a suitable oscilloscope.

#### 5.5.4.2.3 Test report

The test report shall give the measured modulation index of the interrogator field, the rise and fall times and the overshoot values within the defined operating volume. The pass/fail condition is determined by the values defined in ISO/IEC 18000-3 mode 3.

#### 5.5.4.3 Load modulation reception (informative only)

This is an indirect test of the ability of the interrogator to receive a minimum signal from the tag. This test verifies that an interrogator correctly detects the load modulation of a tag that conforms to the base standard, ISO/IEC 18000-3 mode 3. It is supposed that the interrogator has means to indicate correct reception of the sub-carrier produced by a test tag.

Annex G shows a circuit which can be used in conjunction with the test apparatus to determine the sensitivity of an interrogator to load modulation within the defined operating volume.

The pass/fail condition is determined by a tag signal having the values defined below. Failure under this criterion shall not be interpreted as failure of conformance for an otherwise conforming interrogator.

The load modulation shall be at least 10mV for ISO card sized tags (ID1), for other label form factors the label manufacturer shall specify the minimum load modulation.

## Annex A (normative)

### Test setup parameters and dimensions for tags smaller than or equal to an ISO/IEC 7810 ID-1 outline

#### A.1 General

This normative Annex describes guidelines for the modification of the test set-up if RFID tags equal to or smaller than ID-1 size are to be measured.

#### A.2 Calibration coil

**Table A.1 — Definition of calibration coil for ID-1 or smaller**

| Symbol    | Value                                 |
|-----------|---------------------------------------|
| <i>oa</i> | defined in ISO/IEC 7810 for ID-1 type |
| <i>ob</i> | defined in ISO/IEC 7810 for ID-1 type |
| <i>ca</i> | 72 mm (+/- 2 %)                       |
| <i>cb</i> | 42 mm (+/- 2 %)                       |
| <i>co</i> | 5 mm (+/- 2 %)                        |

NOTE 1 The area over which the field is integrated is approximately 3000 mm<sup>2</sup>.

NOTE 2 At 13,56 MHz the approximate inductance is 250 nH and the approximate resistance is 0,4 Ω.

NOTE 3 A parasitic capacitance of the probe assembly of less than 35 pF normally ensures a resonant frequency for the whole set of greater than 60 MHz.

The open circuit calibration factor for this coil is 320 mV (rms) per A/m (rms) [equivalent to 900 mV (peak-to-peak) per A/m (rms)].

#### A.3 Test interrogator assembly

**Table A.2 — Definition of test interrogator for ID-1 or smaller**

| Symbol     | Value  |
|------------|--------|
| <i>asp</i> | 3 mm   |
| <i>lx</i>  | 150 mm |
| <i>dis</i> | 100 mm |

## A.4 Reference tag

**Table A.3 — Reference tag for ID-1 or smaller**

| Symbol    | Value             |
|-----------|-------------------|
| <i>nr</i> | 4                 |
| <i>ar</i> | 72 mm (+/- 2 %)   |
| <i>br</i> | 42 mm (+/- 2 %)   |
| <i>wr</i> | 500 µm (+/- 20 %) |
| <i>sr</i> | 500 µm (+/- 20 %) |

NOTE At 13,56 MHz the nominal inductance is 3,5 µH and the nominal resistance is 1 Ω.

## A.5 Test interrogator antenna

**Table A.4 — Test interrogator antenna for ID-1 or smaller**

| Symbol     | Value  |
|------------|--------|
| <i>lya</i> | 170 mm |
| <i>lyb</i> | 170 mm |
| <i>lyd</i> | 150 mm |
| <i>lyw</i> | 1,8 mm |

## A.6 Impedance matching network

**Table A.5 — Impedance matching network components for ID-1 or smaller**

| Component        | Value                |
|------------------|----------------------|
| C1               | 47 pF                |
| C2               | 180 pF               |
| C3               | 33 pF                |
| C4               | 2-27 pF              |
| R <sub>ext</sub> | 5 x 4,7 (parallel) Ω |

## A.7 Sense coil

**Table A.6 — Sense coil for ID-1 or smaller**

| Symbol     | Value  |
|------------|--------|
| <i>lya</i> | 170 mm |
| <i>lyb</i> | 170 mm |
| <i>sa</i>  | 70 mm  |
| <i>sb</i>  | 100 mm |
| <i>rs</i>  | 10 mm  |

## A.8 Reference tag for interrogator power test

Table A.7 — Reference tag for interrogator power test for ID-1 or smaller

| Component | Value         |
|-----------|---------------|
| C3        | 27 pF         |
| R1        | 11 k $\Omega$ |
| R2        | 91 $\Omega$   |

IECNORM.COM : Click to view the full PDF of ISO/IEC TR 18047-3:2011

## Annex B (normative)

### Guideline for RFID tags larger than ISO/IEC 7810 ID-1 size

#### B.1 General

This normative Annex describes guidelines for the modification of the test set-up if RFID tags larger than ID-1 size are to be measured.

#### B.2 Calibration coil

*oa, ob*:

The calibration coil PCB shall be of a suitable size to carry the single turn calibration coil and printed connections.

*ca, cb, co*:

The single turn calibration coil shall be of the same shape and dimensions as the RFID tag Antenna under test.

**NOTE** A parasitic capacitance of the probe assembly of less than 25 pF normally ensures a resonant frequency for the whole set of greater than 60 MHz for *ca* = 81 mm and *cb* = 47 mm. A parasitic capacitance of the probe assembly of less than 15 pF normally ensures a resonant frequency for the whole set of greater than 60 MHz for *ca* = 125 mm and *cb* = 73 mm.

Calibration factor

The open circuit calibration factor  $k_c$  of the calibration coil can be calculated as follows:

$$k_c = 1 / (2 \times \sqrt{2} \times \mu_0 \times \omega_b \times A_c)$$

$k_c$  Calibration factor of the calibration coil [ A/m (rms) per Volt (peak to peak) ]

$\mu_0$  Permeability equal to  $4 \times \pi \times 10^{-7}$  [Vs / Am] for free space

$\omega_b$   $2 \times \pi \times f_0$  (  $f_0$  = System frequency of the RFID system [Hz] )

$A_c$  Area of the single turn calibration coil [m<sup>2</sup>]

The induced voltage  $V_{c,pp}$  (peak-peak) in the calibration coil can be calculated as follows:

$$V_{c,pp} = H_{rms} / k_c$$

$H_{rms}$  Magnetic field strength (rms value)

$V_{c,pp}$  Induced voltage in the calibration coil (peak-peak value)

### B.3 Test interrogator assembly

*asp*:

The air spacing shall be chosen depending on the DUT form factor to get the appropriate compromise between adverse loading effect and reduction in measurement sensitivity.

*lx*:

The length of the test interrogator assembly connection cable shall be as short as possible but not longer than 1,5 times the distance between the test interrogator antenna and the sense coils.

*dis*:

The distance between the test interrogator antenna and the sense coils shall be chosen so that the modulation of the tag under test is negligible at the position of the calibration coil.

### B.4 Reference tag

*nr*:

The reference tag number of turns shall equal those of the RFID tag antenna under test.

*ar, br*:

The outer size of the coil shall equal that of the RFID tag antenna under test.

*wr, sr*:

The reference tag track width and track spacing shall equal those of the RFID tag antenna under test.

### B.5 Test interrogator antenna

*lya, lyb*:

The test Interrogator antenna PCB shall have a suitable size to carry the test interrogator antenna and the impedance matching network.

*lyd*:

The diameter of the test interrogator antenna shall be approximately twice the maximum linear dimension of the RFID tag antenna under test.

*lyw*:

The test interrogator coil track width shall be sufficient to carry the current and maintain thermal stability for the materials being used.

## B.6 Impedance matching network

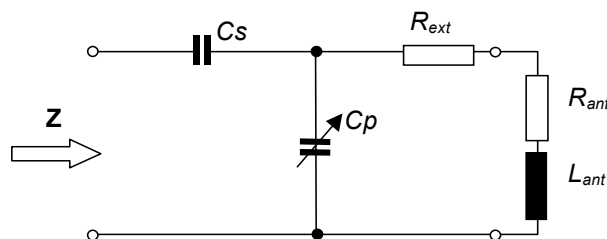


Figure B.1 — Impedance matching network

The Quality factor  $Q$  of the antenna, is defined as follows:

$$Q = L_{ant} \times \omega_0 / (R_{ext} + R_{ant})$$

$R_{ext}$  External resistor to limit the quality factor of the antenna

$L_{ant}$  Inductance of the test interrogator antenna

$R_{ant}$  Resistance of the test interrogator antenna

$\omega_0$  The angular frequency corresponding to the RFID system (2.PI.13,56MHz)

Note the quality factor  $Q$  needs to be limited to guarantee the rise and fall times of modulation pulse defined in the base standard (typically  $Q \leq 30$ ).

The impedance matching network can be calculated as follows:

$$R_{ext} = L_{ant} \times \omega_0 / Q$$

$R_{ext}$  External resistor to limit the quality factor of the antenna

$L_{ant}$  Inductance of the test interrogator antenna

$R_{ant}$  Resistance of the test interrogator antenna

$\omega_0$   $2 \times \pi \times f_0$  (  $f_0$  = system frequency of the RFID system [Hz] )

$Q$  Quality factor

The values of the capacitors  $C_s$  and  $C_p$  are calculated in order to ensure the tuned frequency of 13,56 MHz and the matching to 50  $\Omega$ .

Resonance condition:

$$L_{ant} \times (C_s + C_p) \times (\omega_0)^2 = 1$$

Matching condition:

$$((C_s + C_p) / C_s) \times (R_{ext} + R_{ant}) = Z_0$$

$C_s$  Serial capacitance of the impedance matching network

$C_p$  Parallel capacitance of the impedance matching network

$Z_0$  Impedance of the impedance matching network, 50  $\Omega$

NOTE Suitable  $C_s$  and  $C_p$  need sufficient voltage rating (up to 200V for an antenna as defined in A.2). Suitable  $R_{ext}$  need a low inductance resistor and sufficient power rating (close to 2W for a field of 5A/m and up to 10W for 12 A/m in case of an antenna as defined in A.)

## B.7 Sense coil

*lya, lyb:*

The sense coil PCB shall be of a suitable size to carry the single turn sense coil and printed connections.

*sa, sb, rs:*

The sense coil shall be of the same shape and approximately 1/3 larger than the RFID tag antenna under test.

## B.8 Reference tag for interrogator power test

$C3$  (see Annex F):

The value of  $C3$  has to be chosen so that the resonance circuit can be tuned to the RFID system frequency (depending on the inductance of the reference tag coil).

The resonant frequency of the reference tag is measured by using an impedance analyser or a LCR-meter connected to a calibration coil. The coil of the reference tag should be placed at a distance of 10 mm from the calibration coil, with the axes of the two coils being congruent. The resonant frequency is that frequency at which the resistive part of the measured complex impedance is at maximum.

$R1, R2$  (see Annex F):

The value of  $R1$  can be ascertained with the following procedure:

Tune the reference tag to the RFID System frequency. Set Jumper J1 to position a to activate  $R1$ . Place the reference tag in the position of the RFID tag under test in the test interrogator assembly. Adjust the magnetic field strength in the assembly to the  $H_{min}$  value. The measurement of the magnetic field is performed with the calibration coil at the opposite side of the test interrogator antenna coil. Adjust  $R1$  to obtain  $V_{DC} = 3V_{dc}$  across  $R3$  measured with a high impedance voltmeter.

The value of  $R2$  can be ascertained with the following procedure:

Tune the reference tag to the RFID system frequency. Set Jumper J1 to position b to activate  $R2$ . Place the reference tag in the position of the RFID tag under test in the test interrogator assembly. Adjust the magnetic field strength in the assembly to the  $H_{max}$  value. The measurement of the magnetic field is performed with the calibration coil at the opposite side of the test interrogator antenna coil. Adjust  $R2$  to obtain  $V_{DC} = 3V_{dc}$  across  $R3$  measured with a high impedance voltmeter.


$R1$  and  $R2$  shall be suitable potentiometers to obtain  $V_{DC} = 3V_{dc}$ ; The potentiometer shall have a small outline to keep stray capacitance at a minimum.



## Annex C (normative)

### Test interrogator antenna

#### C.1 Layout including impedance matching network

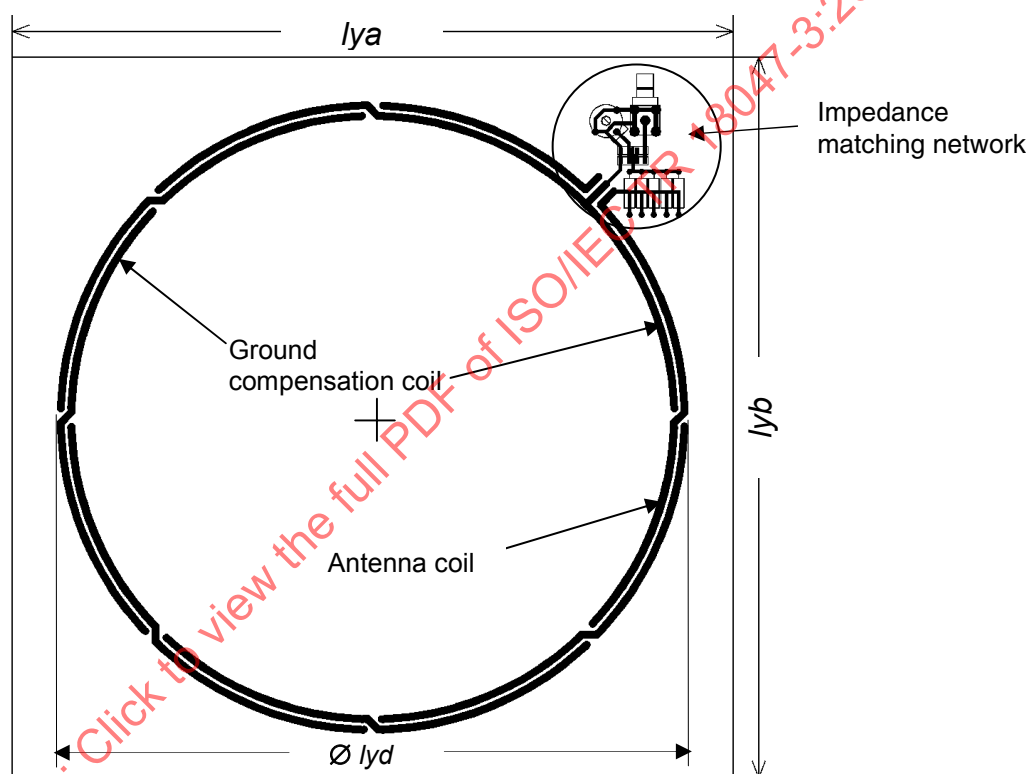

Drawings are not to scale. The antenna coil track width is  $l_{yw}$  (except for through-plated holes). Starting from the impedance matching network there are crossovers every  $45^\circ$ . PCB: FR4 material thickness 1,6 mm, double sided with  $35\ \mu\text{m}$  copper.

**Figure C.1 — Test interrogator antenna layout including impedance matching network  
(view from front)**

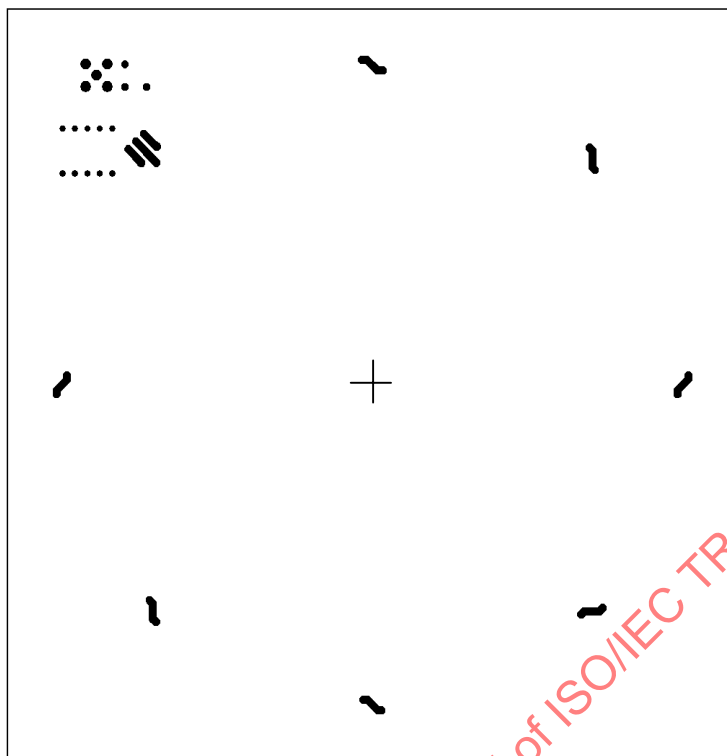


Figure C.2 — Test interrogator antenna layout (view from back)

NOTE PCBs and/or finished test set-ups may be available from:

Austrian Institute of Technology  
Giefinggasse 2  
1210 Vienna  
Austria

Tel.: +43/(0)50 550-0  
Fax: +43/(0)50 550-6666  
E-Mail: [techbase@ait.ac.at](mailto:techbase@ait.ac.at)

or from other sources.

## C.2 Impedance matching network

The antenna impedance ( $R_{ant}$ ,  $L_{ant}$ ) is matched to the function generator output impedance ( $Z = 50 \Omega$ ) by a matching circuit (see below). The capacitors C1, C2 and C3 have fixed values. The input impedance phase can be adjusted with the variable capacitor C4, see Annex A.6 and Annex B.6 as appropriate.

**IMPORTANT** Be careful with the maximum voltage on the capacitors C1, C2, C3 and C4 and with the maximum power dissipation on the resistor  $R_{ext}$ . In case of tags smaller than or equal to an ISO/IEC 7810 ID-1 outline, where the test interrogator antenna is defined in Annex A.5, the limits of the individual components can reach:

- 200 V in voltage rating for the capacitors,
- approximately 2 W dissipated on  $R_{ext}$  for a field value of 5 A/m,
- approximately 10 W dissipated on  $R_{ext}$  for a field value of 12 A/m.

The linear low distortion variable output  $50 \Omega$  power driver should be capable of emitting appropriate signal sequences. The modulation index should be adjustable in the ranges of 10 % - 30 % and 95 % - 100 %. The output power should be adjustable to deliver field strengths as specified in the base standard, ISO/IEC 18000-3. Care should be taken with the duration of fields above the upper operating range.

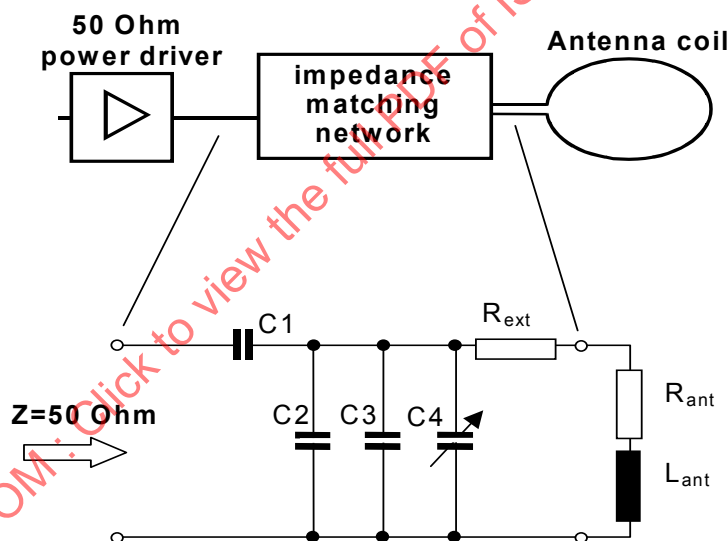


Figure C.3 — Impedance matching network

## Annex D (informative)

### Test interrogator antenna tuning

The figures below show the two steps of a simple phase tuning procedure to match the impedance of the antenna to that of the driving generator. After the two steps of the tuning procedure the signal generator shall be directly connected to the antenna output for the tests.

#### Step 1:

A high precision resistor of  $50\ \Omega \pm 1\%$  (e.g.  $50\ \Omega$  BNC resistor) is inserted in the signal line between the signal generator output and an antenna connector. The probes of the oscilloscope are connected to the two sides of the serial reference resistor. The oscilloscope displays a Lissajous figure when it is set in Y to X presentation. The signal generator is set to:

|            |                       |
|------------|-----------------------|
| Wave form: | Sinusoidal            |
| Frequency: | 13,56 MHz             |
| Amplitude: | 2 V (rms) – 5 V (rms) |

The output is terminated with a second high precision resistor of  $50\ \Omega \pm 1\%$  (e.g.  $50\ \Omega$  BNC terminating resistor). The probe, which is in parallel to the output connector has a small parasitic capacitance  $C_{\text{probe}}$ . A calibration capacitance  $C_{\text{cal}}$  in parallel to the reference resistor compensates this probe capacitor if  $C_{\text{cal}} = C_{\text{probe}}$ . The probe capacitor is compensated when the Lissajous figure is completely closed.

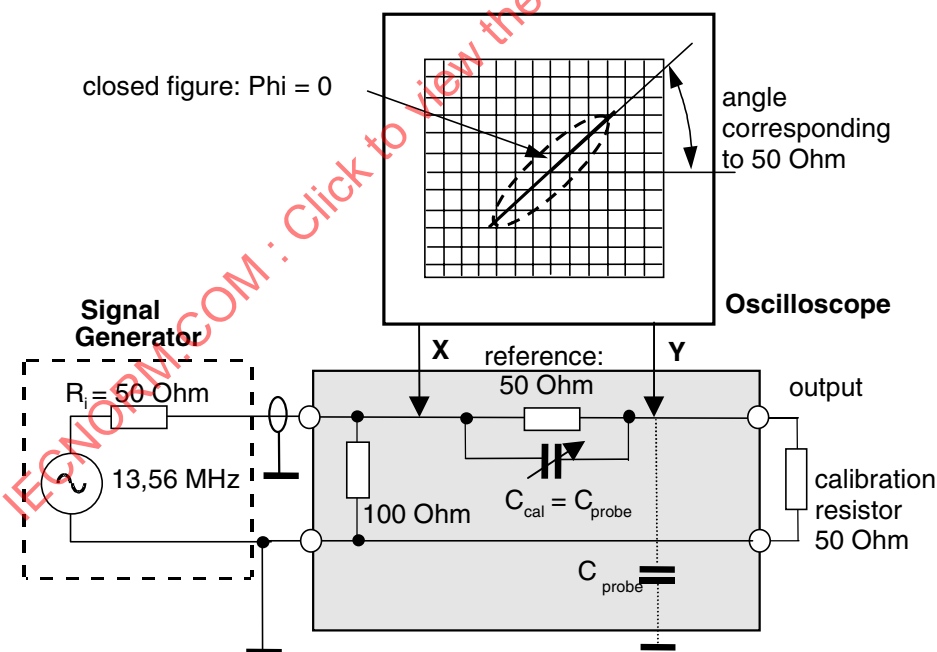
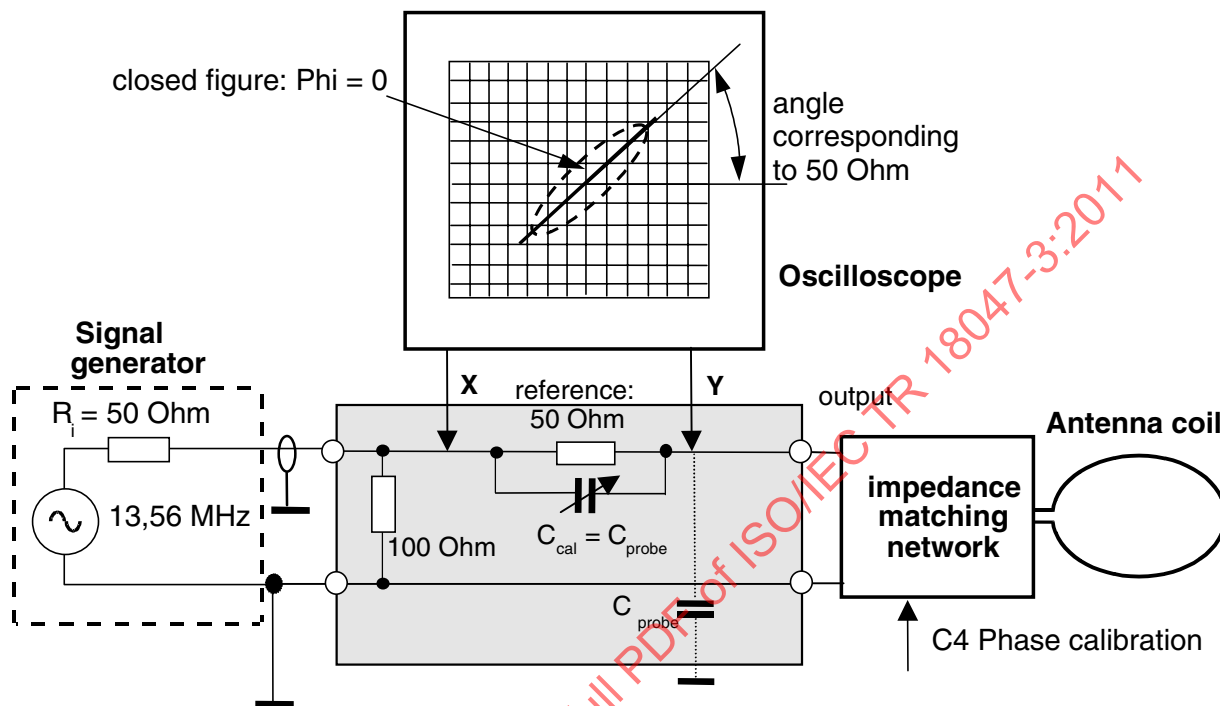


Figure D.1 — Calibration set-up (Step 1)

**IMPORTANT** The ground cable has to be run close to the probe to avoid induced voltages caused by the magnetic field.

**Step 2:**

Using the same values as set for step 1, in the second step the matching circuitry is connected to the antenna output. The capacitor C4 on the antenna board is used to tune the phase to zero.

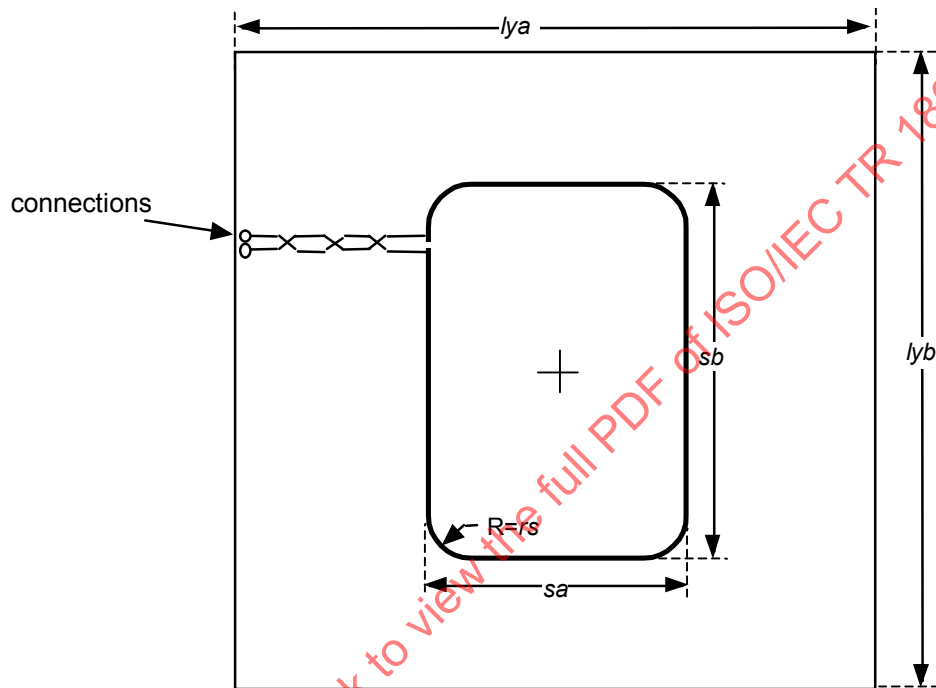


**Figure D.2 — Calibration set-up (Step 2)**

## Annex E (normative)

### Sense coil

#### E.1 Sense coil layout



Drawings are not to scale. The sense coil track width is 0,5 mm +/- 20 % (except for through-plated holes). Sizes of the coils refer to the outer dimensions. PCB: FR4 material thickness 1,6 mm, double sided with 35 µm copper.

**Figure E.1 — Layout for sense coils a and b**

**NOTE** PCBs and/or finished test set-ups may be available from:

Austrian Institute of Technology  
Giefinggasse 2  
1210 Vienna  
Austria

Tel.: +43/(0)50 550-0  
Fax: +43/(0)50 550-6666  
E-Mail: techbase@ait.ac.at

or from other sources.