
**Information technology — 8 mm wide
magnetic tape cartridge for information
interchange — Helical scan recording AIT-2
with MIC format**

*Technologies de l'information — Cartouche à bande magnétique de 8 mm
de large pour l'échange d'information — Enregistrement par balayage en
spirale AIT-2 avec format MIC*

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

IECNORM.COM : Click to view the full PDF of ISO/IEC 18810:2001

© ISO/IEC 2001

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Contents

Section 1 – General	1
1 Scope	1
2 Conformance	1
2.1 Magnetic tape cartridge	1
2.2 Generating drive	1
2.3 Receiving drive	1
3 Normative references	2
4 Definitions	2
4.1 Absolute Frame Number (AFN)	2
4.2 a.c. erase	2
4.3 Access	2
4.4 algorithm	2
4.5 Area ID	2
4.6 Automatic Track Finding (ATF)	2
4.7 Average Signal Amplitude	2
4.8 azimuth	2
4.9 back surface	2
4.10 byte	2
4.11 cartridge	2
4.12 Channel bit	2
4.13 Codeword	2
4.14 Early Warning Point (EWP)	2
4.15 End of Data (EOD)	2
4.16 Entity	2
4.17 Error Correcting Code (ECC)	2
4.18 flux transition position	2
4.19 flux transition spacing	2
4.20 Frame	3
4.21 Housekeeping Frame	3
4.22 Logical Beginning of Tape (LBOT)	3
4.23 magnetic tape	3
4.24 Master Standard Amplitude Calibration Tape	3
4.25 Master Standard Reference Tape	3
4.26 Memory In Cartridge (MIC)	3
4.27 Partition Boundary	3
4.28 Physical Beginning of Tape (PBOT)	3
4.29 Physical End of Tape (PEOT)	3
4.30 physical recording density	3
4.31 pre-recording condition	3
4.32 processing	3
4.33 processed data	3
4.34 Processed Record	3
4.35 record	3
4.36 Reference Field	3
4.37 Secondary Standard Amplitude Calibration Tape	3
4.38 Secondary Standard Reference Tape	3
4.39 Separator Mark	4

4.40	Standard Reference Amplitude (SRA)	4
4.41	Tape Reference Edge	4
4.42	Typical Field	4
4.43	Standard Reference Current	4
4.44	Test Recording Current	4
4.45	track	4
4.46	unprocessed data	4
4.47	Unprocessed Record	4
5	Conventions and Notations	4
5.1	Representation of numbers	4
5.2	Names	4
6	Acronyms	4
7	Environment and safety	5
7.1	Test environment	5
7.2	Operating environment	5
7.3	Storage environment	5
7.4	Transportation	5
7.5	Safety	5
7.6	Flammability	5
Section 2 - Requirements for the case		6
8	Dimensional and mechanical characteristics of the case	6
8.1	General	6
8.2	Overall dimension	6
8.3	Holding areas	7
8.4	Cartridge insertion	7
8.5	Window	8
8.6	Loading grips	8
8.7	Label areas	8
8.8	Datum areas and Datum holes	8
8.9	Support areas	9
8.10	Recognition holes	10
8.11	Write-inhibit hole	10
8.12	Pre-positioning surfaces	11
8.13	Cartridge lid	11
8.14	Cartridge reel lock	13
8.15	Reel access holes	13
8.16	Interface between the reels and the drive spindles	14
8.17	Light path	15
8.18	Position of the tape in the case	15
8.19	Tape path zone	16
8.20	Tape access cavity	16
8.21	Tape access cavity clearance	16
8.22	Requirements for the MIC	16
8.23	Recognition recesses	18
Section 3 - Requirements for the unrecorded tape		38
9	Mechanical, physical and dimensional characteristics of the tape	38
9.1	Materials	38
9.2	Tape length	38
9.2.1	Length of magnetic tape	38
9.2.2	Length of leader and trailer tapes	38
9.2.3	Length of the splicing tapes	38
9.3	Tape width	38
9.3.1	Width of magnetic, leader and trailer tapes	38

9.3.2	Width and position of the splicing tape	38
9.4	Discontinuities	39
9.5	Tape thickness	39
9.5.1	Thickness of the magnetic tape	39
9.5.2	Thickness of the leader and trailer tape	39
9.5.3	Thickness of the splicing tape	39
9.6	Longitudinal curvature	39
9.7	Cupping	39
9.8	Coating adhesion	39
9.9	Layer-to-layer adhesion	40
9.10	Tensile strength	40
9.10.1	Breaking strength	40
9.10.2	Yield strength	40
9.11	Residual elongation	40
9.12	Electrical resistance of the recording surface	40
9.13	Tape winding	41
9.14	Light transmittance of the tape	41
9.15	Recognition stripe	41
10	Magnetic recording characteristics	42
10.1	Typical Field	42
10.2	Signal Amplitude	42
10.3	Resolution	42
10.4	Overwrite	42
10.5	Ease of erasure	43
10.6	Tape quality	43
10.6.1	Missing pulses	43
10.6.2	Missing pulse zone	43
10.7	Signal-to-Noise Ratio (SNR) characteristic	43
Section 4	Requirements for an interchanged tape	44
11	Format	44
11.1	General	44
11.2	Basic Groups	44
11.2.1	Entity	45
11.2.2	Group Information Table	45
11.2.3	Block Access Table (BAT)	47
11.3	Sub-Groups	50
11.3.1	G1 Sub-Group	50
11.3.2	G2 Sub-Group - Randomizing	51
11.3.3	G3 Sub-Group	52
11.4	Data Block	52
11.4.1	ID information	53
11.4.2	Recording of the ID Information in the Data Block Headers	55
12	Method of recording	61
12.1	Physical recording density	62
12.2	Long-term average bit cell length	62
12.3	Short-term average bit cell length	62
12.4	Rate of change	62
12.5	Bit shift	62
12.6	Read signal amplitude	62
12.7	Maximum recorded levels	62

13	Track geometry	62
13.1	Track configuration	62
13.2	Average track pitch	63
13.3	Variations of the track pitch	63
13.4	Track width	63
13.5	Track angle	63
13.6	Track edge straightness	63
13.7	Track length	63
13.8	Azimuth angles	63
14	Recorded patterns	64
14.1	Recorded Data Block	64
14.2	Margin blocks	64
15	Format of a track	64
15.1	Track structure	64
15.2	Positioning accuracy	65
15.3	Tracking scheme	66
16	Layout of the tape	66
16.1	Device Area	67
16.2	Reference Area	67
16.3	Position Tolerance Band No. 1	68
16.4	System Area	68
16.4.1	System Preamble	68
16.4.2	System Log	68
16.4.3	System Postamble	72
16.4.4	Position Tolerance Band No. 2	72
16.4.5	Vendor Group Preamble	72
16.5	Data Area	72
16.5.1	Vendor Group	72
16.5.2	Recorded Data Group	72
16.5.3	ECC3	72
16.5.4	Multiple Recorded Instances	73
16.5.5	Repeated Frames	73
16.5.6	Appending and overwriting	74
16.6	EOD Area	75
16.7	Optional Device Area	75
16.8	Logical End Of Tape (LEOT)	76
16.9	Logical Beginning of Tape (LBOT)	76
16.10	Early Warning Point - EWP	76
16.11	Empty Partition	76
16.12	Initialization	76
17	Housekeeping Frames	77
17.1	Amble Frames	77
17.2	System Amble Frames	77
18	Content of the MIC	78
Annexes		
A	Measurement of light transmittance	79
B	Measurement of Signal-to-Noise Ratio	82
C	Method for determining the nominal and the maximum allowable recorded levels (pre-recording condition)	83
D	Representation of 16-bit words by 20-Channel bits patterns	84
E	Measurement of bit shift	86

F - Method of measuring the straightness of track edges	88
G - ECC calculation	89
H - Recommendations for transportation	92
J - Read-After-Write	93
K - Example of the content of a Basic Group No. 0	94
L - Examples of chip	95

IECNORM.COM : Click to view the full PDF of ISO/IEC 18810:2001

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

International Standard ISO/IEC 18810 was prepared by ECMA (as ECMA-292) and was adopted, under a special “fast-track procedure”, by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, in parallel with its approval by national bodies of ISO and IEC.

Annexes A to G form a normative part of this International Standard. Annexes H to L are for information only.

Information technology — 8 mm wide magnetic tape cartridge for information interchange — Helical scan recording AIT-2 with MIC format

Section 1 – General

1 Scope

This International Standard specifies the physical and magnetic characteristics of an 8 mm wide magnetic tape cartridge containing a memory chip to enable physical interchange of such cartridges between drives. It also specifies the quality of the recorded signals, the recording method and the recorded format - called Advanced Intelligent Tape No.2 with Memory In Cartridge (AIT-2 with MIC) - thereby allowing data interchange between drives by means of such magnetic tape cartridges. The System Log are recorded in the MIC.

This International Standard specifies two types of cartridge depending on the thickness of the magnetic tape contained in the case.

Information interchange between systems also requires, at a minimum, agreement between the interchange parties upon the interchange code(s) and the specifications of the structure and labelling of the information on the interchanged cartridge.

2 Conformance

2.1 Magnetic tape cartridge

A tape cartridge shall be in conformance with this International Standard if it meets all the mandatory requirements specified herein. The tape requirements shall be satisfied throughout the extent of the tape.

2.2 Generating drive

A drive generating a magnetic tape cartridge for interchange shall be in conformance with this International Standard if all recordings on the tape meet the mandatory requirements of this International Standard, and if either or both methods of appending and overwriting are implemented. In addition, such a drive shall be able to record the System Log in the MIC.

A claim of conformance shall state which of the following optional features are implemented and which are not

- the performing of a Read-After-Write check and the recording of any necessary repeated frames;
- the generation of ECC3 Frames.

In addition a claim of conformance shall state

- whether or not one, or more, registered algorithm(s) are implemented within the system and are able to compress data received from the host prior to collecting the data into Basic Groups, and
- the registered identification number(s) of the implemented compression algorithm(s).

2.3 Receiving drive

A drive receiving a magnetic tape cartridge for interchange shall be in conformance with this International Standard if it is able to handle any recording made on the tape according to this International Standard. In particular it shall

- be able to read the System Log recorded in the MIC,
- be able to recognise repeated frames, and to make available to the host, data and Separator Marks from only one of these frames;
- be able to recognise multiple representations of the same Basic Group, and to make available to the host, data and Separator Marks from only one of these representations;
- be able to recognise an ECC3 frame, and ignore it if the system is not capable of using ECC3 check bytes in a process of error correction;
- be able to recognise processed data within an Entity, identify the algorithm used, and make its registered identification number available to the host;
- be able to make processed data available to the host.

In addition a claim of conformance shall state

- whether or not the system is capable of using ECC3 check bytes in a process of error correction;
- whether or not one or more de-compression algorithm(s) are implemented within the system, and are able to be applied to compressed data prior to making such data available to the host;
- the registered identification number(s) of the compression algorithm(s) for which a complementary de-compression algorithm is implemented.

3 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 527-3:1995	<i>Plastics — Determination of tensile properties — Part 3: Test conditions for films and sheets.</i>
ISO 1302:1992	<i>Technical drawings — Method of indicating surface texture.</i>
ISO/IEC 11576:1994	<i>Information technology — Procedure for the registration of algorithms for the lossless compression of data.</i>
IEC 60950:1999	<i>Safety of information technology equipment.</i>

4 Terms and definitions

For the purposes of this International Standard the following terms and definitions apply.

- 4.1 Absolute Frame Number (AFN):** A sequence number encoded in a Frame.
- 4.2 a.c. erase:** A process of erasure using magnetic fields of decaying intensity.
- 4.3 Access:** A read or write pass over a partition.
- 4.4 algorithm:** A set of rules for transforming the logical representation of data.
- 4.5 Area ID:** An identifier defining the area of the tape and specifying the types of Frame written.
- 4.6 Automatic Track Finding (ATF):** The method by which tracking is achieved.
- 4.7 Average Signal Amplitude:** The average peak-to-peak value of the output signal from the read head at the fundamental frequency of the specified physical recording density over a minimum of 20,0 mm of track, exclusive of missing pulses.
- 4.8 azimuth:** The angular deviation made by the mean flux transition line with a line normal to the centreline of the recorded track.
- 4.9 back surface:** The surface of the tape opposite to the magnetic coating which is used to record data.
- 4.10 byte:** An ordered set of bits acted upon as a unit.
- 4.11 cartridge:** A case containing magnetic tape stored on twin hubs.
- 4.12 Channel bit:** The elements by which, after modulation, the binary values ZERO and ONE are represented on tape by different residual magnetisms.
- 4.13 Codeword:** A word generated by a compression algorithm. The number of bits in a Codeword is variable, and is not specified by this International Standard.
- 4.14 Early Warning Point (EWP):** A point along the length of the tape at which warning is given of the approach, in the forward direction of tape motion, of the Partition Boundary or of the Physical End of Tape.
- 4.15 End of Data (EOD):** The point on the tape at the end of the group which contains the last user data.
- 4.16 Entity:** A unit of recorded data, comprising an Entity Header and a Record sequence.
- 4.17 Error Correcting Code (ECC):** A mathematical computation yielding check bytes used for the detection and correction of errors.
- 4.18 flux transition position:** That point which exhibits maximum free-space flux density normal to the tape surface.
- 4.19 flux transition spacing:** The distance along a track between successive flux transitions.

- 4.20 Frame:** A pair of adjacent tracks with azimuths of opposite polarity, in which the track with the positive azimuth precedes that with the negative azimuth.
- 4.21 Housekeeping Frame:** A Frame which contains no user data and which is identified as such by the setting of the Data Fields therein.
- 4.22 Logical Beginning of Tape (LBOT):** The point along the length of the tape where a recording of data for interchange commences.
- 4.23 magnetic tape:** A tape which will accept and retain the magnetic signals intended for input, output and storage purposes on computers and associated equipment.
- 4.24 Master Standard Amplitude Calibration Tape:** A pre-recorded tape on which the standard signal amplitudes have been recorded in the tracks of positive and negative azimuth recorded at a track pitch of 11,0 μm , on an a.c. erased tape.

Note 1 - The tape includes recording at 2 053,6 ftpmm and 4 107,1 ftpmm.

Note 2 - The Master Standard Amplitude Calibration Tape has been established by Sony Corporation.

- 4.25 Master Standard Reference Tape:** A tape selected as the standard for the Reference Recording Field, Signal Amplitude, Resolution, Overwrite and Signal-to-Noise ratio.

Note - The Master Standard Reference Tape has been established by Sony Corporation.

- 4.26 Memory In Cartridge (MIC):** A chip within the case containing information about the cartridge and its recordings.
- 4.27 Partition Boundary:** The point along the length of a magnetic tape at which a Partition ends and the next Partition commences.
- 4.28 Physical Beginning of Tape (PBOT):** The point where the leader tape is joined to the magnetic tape.
- 4.29 Physical End of Tape (PEOT):** The point where the trailer tape is joined to the magnetic tape.
- 4.30 physical recording density:** The number of recorded flux transitions per unit length of track, expressed in flux transitions per millimetre (ftpmm).
- 4.31 pre-recording condition:** The recording levels above which a tape intended for interchange shall not previously have been recorded.
- 4.32 processing:** The use of an algorithm to transform host data into Codewords.
- 4.33 processed data:** A sequence of Codewords which results from the application of processing to data.
- 4.34 Processed Record:** A sequence of Codewords which results from the application of processing to an Unprocessed Record.
- 4.35 record:** Related data treated as a unit of information.
- 4.36 Reference Field:** The Typical Field of the Master Standard Reference Tape.
- 4.37 Secondary Standard Amplitude Calibration Tape:** A tape pre-recorded as specified for the Master Standard Amplitude Calibration Tape the outputs of which are related to those of the Master Standard Amplitude Calibration Tape by calibration factors.

Note - Secondary Standard Amplitude Calibration Tapes can be ordered under Part No. SSCT-AIT-2 from Sony Corporation, RME Company, Data Media Marketing Div., 6-7-35 Kitashinagawa, Shinagawa-ku, Tokyo 141, Japan. In principle such Secondary Standard Amplitude Calibration Tapes will be available for a period of 10 years from the publication of the first Edition of this International Standard. However, by agreement between ECMA and Sony Corporation, this period can be shortened or extended to take into account the demand for such Secondary Standard Amplitude Calibration Tapes.

- 4.38 Secondary Standard Reference Tape:** A tape the outputs of which are related to those of the Master Standard Reference Tape by calibration factors.

Note - Secondary Standard Reference Tapes can be ordered under Part No. SSRT-AIT-2 from Sony Corporation, RME Company, Data Media Marketing Div., 6-7-35 Kitashinagawa, Shinagawa-ku, Tokyo 141, Japan. In principle such Secondary Standard Reference Tapes will be available for a period of 10 years from the publication of the first Edition of this International Standard. However, by agreement between ECMA and Sony Corporation, this period can be shortened or extended to take into account the demand for such Secondary Standard Reference Tapes.

It is intended that these be used for calibrating tertiary reference tapes for use in routine calibration.

- 4.39 Separator Mark:** A record containing no user data, which is used to separate data.
- 4.40 Standard Reference Amplitude (SRA):** The Average Signal Amplitude from the tracks of positive azimuth of the Master Standard Amplitude Calibration Tape at a specified physical recording density.
- 4.41 Tape Reference Edge:** The bottom edge of the tape when viewing the recording side of the tape, with the PEOT to the observer's right.
- 4.42 Typical Field:** In the plot of Average Signal Amplitude against the recording field at the physical recording density of 4 107,1 ftpmm, the field that causes an Average Signal Amplitude equal to 90% of the maximum Average Signal Amplitude.
- 4.43 Standard Reference Current:** The current that produces the Reference Field.
- 4.44 Test Recording Current:** The current used to record an SRA. It is 1,5 times the Standard Reference Current.
- 4.45 track:** A diagonally positioned area on the tape along which a series of magnetic signals may be recorded.
- 4.46 unprocessed data:** Data which has not been subjected to processing.
- 4.47 Unprocessed Record:** A record of unprocessed data, comprising an integral number of bytes.

5 Conventions and Notations

5.1 Representation of numbers

A measured value is rounded off to the least significant digit of the corresponding specified value. This implies that, for example, a specified value of 1,26 with a positive tolerance of +0,01 and a negative tolerance of -0,02 allows a range of measured values from 1,235 to 1,275.

The setting of a bit is denoted by ZERO or ONE.

Bit patterns and numbers in binary notation are represented by strings of digits 0 and 1. Within such strings, X may be used to indicate that the setting of a bit is not specified within the string.

Bit patterns and numbers in binary notation are shown with the most significant bit to the left and the least significant bit to the right.

The most significant bit of an 8-bit byte is denoted by b8 and the least significant by b1.

5.2 Names

The names of basic elements, e.g. specific fields, are given with a capital initial letter.

6 Acronyms

AEWP	After Early Warning Point
AFN	Absolute Frame Number
ATF	Automatic Tracking Finding
BAT	Block Access Table
ECC	Error Correcting Code
EOD	End of Data
EWP	Early Warning Point
GIT	Group Information Table
LBOT	Logical Beginning of Tape
LEOT	Logical End of Tape
LSB	Least Significant Byte
LF-ID	Logical Frame Identifier
MIC	Memory in Cartridge
MSB	Most Significant Byte
MSRT	Master Standard Reference Tape
PBOT	Physical Beginning of Tape
PEOT	Physical End of Tape
RAW	Read-After-Write
SNR	Signal-to-Noise Ratio
msb	Most significant bit

7 Environment and safety

7.1 Test environment

Tests and measurements made on the tape cartridge to check the requirements of this International Standard shall be carried out in the following ambient conditions of the air immediately surrounding the drive.

temperature	: 23 °C ± 2 °C
relative humidity	: 40 % to 60 %
conditioning period before testing	: 24 h min.

7.2 Operating environment

Cartridges used for data interchange shall be capable of operating under the following conditions, as measured within 10 mm of the tape exit from the drum of the generating or receiving drive:

temperature	: 5 °C to 45 °C
relative humidity	: 20 % to 80 %
wet bulb temperature	: 26 °C max.

There shall be no deposit of moisture on or in the cartridge.

The above conditions include any temperature rise that may occur while operating the drive.

Conditioning before operating:

If a cartridge has been exposed during storage and/or transportation to a condition outside the above values, before use the cartridge shall be conditioned in the operating environment for a time at least equal to the period during which it has been out of the operating environment, up to a maximum of 24 h.

Note - Rapid variations of temperature should be avoided.

7.3 Storage environment

The following conditions shall be observed during storage

temperature	: 5°C to 32°C
relative humidity	: 20 % to 60 %

The stray magnetic field at any point on the tape shall not exceed 4000 A/m. There shall be no deposit of moisture on or in the cartridge.

7.4 Transportation

Recommended limits for the environment to which a cartridge may be subjected during transportation, and the precautions to be taken to minimize the possibility of damage, are provided in annex H.

7.5 Safety

The cartridge and its components shall satisfy the requirements of Standard IEC 60950. The cartridge and its components shall not constitute any safety or health hazard when used in the intended manner, or through any foreseeable misuse in an information processing system.

7.6 Flammability

The cartridge and its components shall be made from materials, which if ignited from a match flame, do not continue to burn in a still carbon dioxide atmosphere.

Section 2 - Requirements for the case

8 Dimensional and mechanical characteristics of the case

8.1 General

Dimensional characteristics are specified for those parameters deemed to be mandatory for interchange and compatible use of the cartridge. Where there is freedom of design, only the functional characteristics of the elements described are indicated. In the figures a typical implementation is represented in third angle projection.

Figure 1	is a perspective view of the cartridge seen from the top.
Figure 2	is a perspective view of the cartridge seen from the bottom.
Figure 3	is a perspective view of Reference Planes X, Y and Z.
Figure 4	shows the front side with the lid closed.
Figure 5	shows the left side with the lid closed.
Figure 6	shows the top side with the lid closed.
Figure 7	shows the right side with the lid closed.
Figure 8	shows the rear side with the lid closed.
Figure 9	shows the bottom side, Datum and Support areas.
Figure 10	shows the bottom side with the lid removed.
Figure 11	shows an enlarged view of the Datum and Recognition holes.
Figure 12	shows the cross-sections through the light path holes, the Recognition holes and the Write-inhibit hole.
Figure 13	shows details of the lid when closed, rotating and open.
Figure 14	shows the details of the lid release insertion channel.
Figure 15	shows the lid lock release requirements.
Figure 16	shows the reel lock release requirements.
Figure 17	shows the reel unlock force direction.
Figure 18	shows the lid release force direction.
Figure 19	shows the lid opening force direction.
Figure 20	shows the light path and light window.
Figure 21	shows the internal tape path and light path.
Figure 22	shows the cartridge reel and a cross-section of the cartridge reel.
Figure 23	shows a cross-section of the interface of the cartridge reel with the drive spindle.
Figure 24	shows the tape access cavity clearance.
Figure 25	shows the Access Holes of the MIC on the rear side.
Figure 26	shows the Access Holes of the MIC on the bottom side.

The dimensions are referred to three orthogonal Reference Planes X, Y and Z (see figure 3).

Plane X is perpendicular to Plane Z and passes through the centres of the Datum holes A and B.

Plane Y is perpendicular to Plane X and Plane Z and passes through the centre of Datum hole A.

Datum areas A, B and C lie in Plane Z.

8.2 Overall dimension (figures 5 and 6)

The length of the case shall be

$$l_1 = 62,5 \text{ mm} \pm 0,3 \text{ mm}$$

The width of the case shall be

$$l_2 = 95,0 \text{ mm} \pm 0,2 \text{ mm}$$

The distance from the top side of the case to Reference Plane Z shall be

$$l_3 = 15,0 \text{ mm} \pm 0,2 \text{ mm}$$

The distance from the rear side to Plane X shall be

$$l_4 = 47,35 \text{ mm} \pm 0,15 \text{ mm}$$

The distance from the right side to Plane Y shall be

$$l_5 = 13,0 \text{ mm} \pm 0,1 \text{ mm}$$

8.3 Holding areas

The holding areas shown shaded in figure 6 shall be the areas along which the cartridge shall be held down when inserted into the drive. The distance of the holding areas from Plane X shall be

$$l_6 = 12,0 \text{ mm max.}$$

The width when measured from the edges of the case shall be

$$l_7 = 3,0 \text{ mm min.}$$

8.4 Cartridge insertion

The cartridge shall have asymmetrical features to prevent insertion into the drive in other than the correct orientation. These consist of a channel, a recess and an incline.

The channel (figures 4 and 14) shall provide for an unobstructed path, when the lid is closed and locked, to unlock the lid. The distance of the channel from Plane Y shall be

$$l_8 = 79,6 \text{ mm} \pm 0,2 \text{ mm}$$

There shall be a chamfer at the beginning of the channel defined by

$$l_9 = 1,0 \text{ mm} \pm 0,1 \text{ mm}$$

$$l_{16} = 1,5 \text{ mm} \pm 0,1 \text{ mm}$$

An additional chamfer further into the channel shall be defined by

$$l_{10} = 0,7 \text{ mm} \pm 0,1 \text{ mm}$$

$$l_{17} = 1,9 \text{ mm} \pm 0,1 \text{ mm}$$

$$l_{18} = 3,65 \text{ mm} \pm 0,10 \text{ mm}$$

The innermost width of the channel shall be

$$l_{11} = 1,0 \text{ mm min.}$$

There shall be a chamfer on the lid defined by

$$l_{12} = 1,2 \text{ mm} \pm 0,1 \text{ mm}$$

$$l_{13} = 0,8 \text{ mm} \pm 0,1 \text{ mm}$$

$$l_{14} = 1,2 \text{ mm} \pm 0,1 \text{ mm}$$

$$l_{15} = 0,5 \text{ mm} \pm 0,1 \text{ mm}$$

The distance from the left side of the case to the release pin shall be

$$l_{19} = 0,2 \text{ mm} \pm 0,2 \text{ mm}$$

The height of the insertion area shall be

$$l_{20} = 2,3 \text{ mm min.}$$

$$l_{21} = 2,5 \text{ mm} \quad + 0,2 \text{ mm}$$

$$- 0,0 \text{ mm}$$

The recess is located on the right side of the cartridge. The position and dimensions (figures 7 and 10) shall be defined by

$$l_{22} = 7,5 \text{ mm max.}$$

$$l_{23} = 11,0 \text{ mm} \pm 0,2 \text{ mm}$$

$$l_{24} = 1,5 \text{ mm} \pm 0,1 \text{ mm}$$

The depth of the recess shall be

$$l_{25} = 1,5 \text{ mm} \pm 0,1 \text{ mm}$$

The incline (figure 13) is part of the lid structure. The distance of the incline from Plane X shall be

$$l_{26} = 7,7 \text{ mm} \begin{array}{l} + 0,0 \text{ mm} \\ - 2,5 \text{ mm} \end{array}$$

The angle of the incline shall be

$$a_1 = 17,5^\circ \pm 4,0^\circ$$

The incline shall end at its intersection with radius r_3 (see 8.13).

8.5 Window (figure 1)

A window may be provided on the top side so that parts of the reels are visible. The window, if provided, shall not extend beyond the height of the cartridge.

8.6 Loading grips (figures 5 and 7)

The cartridge shall have a recessed loading grip on the right and on the left side to allow handling by an automatic loading mechanism.

The distance from Plane X to the centreline of the loading grip shall be

$$l_{28} = 39,35 \text{ mm} \pm 0,20 \text{ mm}$$

The distance of the side edges of the loading grips from Plane Z and from the top side, respectively, shall be

$$l_{29} = 1,5 \text{ mm} \pm 0,1 \text{ mm}$$

The width of the indent shall be

$$l_{30} = 5,0 \text{ mm} \pm 0,3 \text{ mm}$$

The depth of the indent shall be

$$l_{31} = 2,0 \text{ mm} \pm 0,2 \text{ mm}$$

The angle of the indent shall be

$$a_2 = 90^\circ \pm 5^\circ$$

8.7 Label areas (figures 6 and 8)

A portion of the rear side of the cartridge and a portion of the top side of the cartridge may be used for labels. The portion and the size of the labels shall not interfere with the operation or clearance requirements of the cartridge component parts.

The area used for labels on the top side shall not extend beyond the inner edge of the holding areas defined by l_6 and l_7 .

The position and dimensions of the label area on the rear side shall be defined by

$$\begin{array}{l} l_{32} = 0,5 \text{ mm min.} \\ l_{33} = 1,5 \text{ mm min.} \\ l_{34} = 65,0 \text{ mm max.} \\ l_{171} \geq l_{164} \end{array}$$

The label areas shall not be recessed by more than 0,3 mm.

8.8 Datum areas and Datum holes

The annular Datum areas A, B and C shall lie in Plane Z (see figures 9, 10 and 11). They determine the vertical position of the cartridge in the drive. Each shall have a diameter $d_1 = 6,0 \text{ mm} \pm 0,1 \text{ mm}$ and be concentric with the respective Datum hole.

The centres of Datum holes A and B shall lie in Plane X.

The centre of the circular Datum hole A shall be at the intersection of Planes X and Y (see figure 10).

The distance from the centre of Datum hole B to Plane Y (see figure 9) shall be

$$l_{35} = 68,0 \text{ mm} \pm 0,1 \text{ mm}$$

The distance from the centre of the circular Datum hole C to Plane Y (see figure 11) shall be

$$l_{36} = 10,20 \text{ mm} \pm 0,05 \text{ mm}$$

The distance from the centre of Datum hole D to that of Datum hole C (see figure 9) shall be

$$l_{37} = 89,4 \text{ mm} \pm 0,1 \text{ mm}$$

The distance from the centres of Datum holes C and D to Plane X (see figure 10) shall be

$$l_{38} = 36,35 \text{ mm} \pm 0,08 \text{ mm}$$

The thickness of the case wall in the Datum areas shall be

$$l_{39} = 1,2 \text{ mm} \pm 0,1 \text{ mm}$$

The diameter at the bottom of Datum hole A and Datum hole C shall be

$$l_{40} = 2,6 \text{ mm min.}$$

The depth of the holes shall be

$$l_{42} = 4,0 \text{ mm min.}$$

The upper diameter of Datum holes A and C shall be

$$l_{44} = 3,00 \text{ mm} \begin{array}{l} + 0,05 \text{ mm} \\ - 0,00 \text{ mm} \end{array}$$

This diameter shall be maintained to a depth of

$$l_{41} = 1,5 \text{ mm min.}$$

The holes shall be tapered from this depth to the bottom of diameter l_{40} .

There shall be a chamfer around the outside of Datum hole A and Datum hole C defined by

$$l_{43} = 0,3 \text{ mm max.}$$

$$a_3 = 45^\circ \pm 1^\circ$$

The width at the bottom of Datum holes B and D shall be l_{40} .

The depth of these holes shall be l_{42} .

The dimensions at the top of these holes shall be

$$l_{45} = 3,5 \text{ mm} \pm 0,1 \text{ mm}$$

$$l_{46} = 3,00 \text{ mm} \begin{array}{l} + 0,05 \text{ mm} \\ - 0,00 \text{ mm} \end{array}$$

$$r_1 = 1,7 \text{ mm min.}$$

This width shall be maintained to a depth l_{41} .

There shall be a chamfer around the outside of Datum holes B and D defined by l_{43} and a_3 .

8.9 Support areas (figure 9)

The cartridge Support areas are shown shaded in figure 9. Support areas A, B and C shall be coplanar with Datum areas A, B and C, respectively, within 0,1 mm. Support area D shall be coplanar with Datum Plane Z within 0,15 mm.

The areas within l_{49} of the edge of the cartridge shall be recessed from the Support areas.

$$l_{49} = 0,5 \text{ mm} \pm 0,1 \text{ mm}$$

The position and dimensions of Support areas A and B shall be defined by

$$l_{47} = 10,0 \text{ mm} \pm 0,1 \text{ mm (twice)}$$

$$l_{48} = 11,0 \text{ mm} \pm 0,1 \text{ mm}$$

$$l_{50} = 7,0 \text{ mm} \pm 0,1 \text{ mm}$$

The distance of Support areas C and D from Plane X shall be

$$l_{51} = 30,0 \text{ mm} \pm 0,1 \text{ mm}$$

The dimensions of Support areas C and D shall be defined by l_{47} and

$$l_{52} = 5,5 \text{ mm} \pm 0,1 \text{ mm}$$

$$l_{53} = 64,5 \text{ mm} \pm 0,2 \text{ mm}$$

8.10 Recognition holes (figures 10, 11 and 12)

There shall be two Recognition holes numbered 1 and 2 as shown in figure 11.

The position of the centre of Recognition hole 1 shall be defined by

$$l_{55} = 39,65 \text{ mm} \pm 0,15 \text{ mm}$$

$$l_{56} = 2,5 \text{ mm} \pm 0,1 \text{ mm}$$

Recognition hole 1 shall be circular, its diameter shall be $3,0 \text{ mm} \pm 0,1 \text{ mm}$. Recognition hole 2 shall have a square form. Its position and dimensions shall be defined by

$$l_{58} = 74,3 \text{ mm} \pm 0,1 \text{ mm}$$

$$l_{142} = 77,3 \text{ mm} \pm 0,1 \text{ mm}$$

$$l_{143} = 41,15 \text{ mm} \pm 0,10 \text{ mm}$$

$$l_{144} = 44,45 \text{ mm} \pm 0,10 \text{ mm}$$

The depth of a closed Recognition hole below Plane Z (section E-E in figure 12) shall be

$$l_{59} = 1,2 \text{ mm} \begin{array}{l} +0,3 \text{ mm} \\ -0,1 \text{ mm} \end{array}$$

The depth below Plane Z of an open Recognition hole shall be

$$l_{60} = 5,0 \text{ mm min.}$$

Section E-E shows a Recognition hole closed by a plug. This plug shall withstand an applied force of 0,5 N without being punched out.

This International Standard prescribes the following states of these holes.

- Recognition hole 1 shall be closed
- Recognition hole 2 shall be open

8.11 Write-inhibit hole (figure 11 and 12)

The Write-inhibit hole shall have a square form. Its position and dimensions shall be

$$l_{172} = 5,40 \text{ mm} \begin{array}{l} +0,05 \text{ mm} \\ -0,10 \text{ mm} \end{array}$$

$$l_{173} = 9,1 \text{ mm} \pm 0,1 \text{ mm}$$

$$l_{174} = 1,4 \text{ mm} \pm 0,1 \text{ mm}$$

$$l_{175} = 8,2 \text{ mm} \pm 0,1 \text{ mm}$$

$$r_9 = 1,6 \text{ mm} \begin{array}{l} +0,15 \text{ mm} \\ -0,10 \text{ mm} \end{array}$$

The position of the Write-inhibit hole below Plane Z shall be

$$l_{180} = 3,0 \text{ mm min.}$$

Recording is enabled or inhibited depending on the position of the Movable Element of the Write-inhibit hole below Plane Z.

Recording is enabled when this position is

$$l_{181} = 0,00 \text{ mm} \begin{array}{l} + 0,00 \text{ mm} \\ - 0,25 \text{ mm} \end{array}$$

Recording is inhibited when this position is

$$l_{182} = 3,0 \text{ mm min.}$$

The position and dimensions of this Movable Element shall be

$$l_{176} = 5,45 \text{ mm} \begin{array}{l} + 0,10 \text{ mm} \\ - 0,15 \text{ mm} \end{array}$$

$$l_{177} = 9,05 \text{ mm} \pm 0,15 \text{ mm}$$

$$l_{178} = 1,57 \text{ mm} \pm 0,15 \text{ mm}$$

$$l_{179} = 5,23 \text{ mm} \begin{array}{l} + 0,10 \text{ mm} \\ - 0,15 \text{ mm} \end{array}$$

This Movable Element shall be such that the state of the Write-inhibit hole shall be visible (see figure 8 as an example). It shall be constructed so as to withstand a force of 0,5 N. The force required to move it shall be between 1 N and 29 N.

8.12 Pre-positioning surfaces (figures 4 and 10)

These surfaces determine the position of the cartridge when it is inserted into the loading slot of the drive.

The distance of the surface on which the Tape Reference Edge rests from Plane Z (figure 4) shall be

$$l_{62} = 2,4 \text{ mm} \begin{array}{l} + 0,0 \text{ mm} \\ - 0,1 \text{ mm} \end{array}$$

The position of the cartridge relative to Plane Y shall be controlled by the pre-positioning surfaces defined by

$$l_{63} = 1,0 \text{ mm} \pm 0,1 \text{ mm}$$

$$l_{64} = 69,0 \text{ mm} \pm 0,2 \text{ mm}$$

The position of the cartridge relative to Plane X shall be controlled by the pre-positioning surfaces defined by

$$l_{65} = 14,65 \text{ mm} \pm 0,10 \text{ mm}$$

The angle of the chamfer at the edge of this surface shall be defined by

$$a_4 = 45^\circ \pm 1^\circ$$

8.13 Cartridge lid (figures 6, 13 and 15)

The cartridge shall have a lid for protection of the tape during handling, storage and transportation. The lid consists of two parts, the main part and an auxiliary part.

The main part rotates around an axis A (see figure 13) the position of which is fixed relative to the case. Its location shall be defined by

$$l_{27} = 0,55 \text{ mm} \pm 0,10 \text{ mm}$$

$$l_{67} = 7,5 \text{ mm} \pm 0,1 \text{ mm}$$

The auxiliary part rotates around axis B the position of which is fixed relative to the main part of the lid and moves with it. When the lid is in the closed position, the location of axis B shall be defined by

$$l_{68} = 7,0 \text{ mm} \pm 0,1 \text{ mm}$$

$$l_{69} = 10,1 \text{ mm} \pm 0,1 \text{ mm}$$

The rotation of the auxiliary part is controlled by a cam at each end so that it follows the path indicated in figure 13.

In the open position, the front edge of the auxiliary part shall be at a height

$$l_{70} = 14,8 \text{ mm min.}$$

above Plane Z.

The case shall allow for proper clearance of the lid and auxiliary part defined by

$$l_{71} = 11,5 \text{ mm} \begin{matrix} + 0,2 \text{ mm} \\ - 0,0 \text{ mm} \end{matrix}$$

$$l_{72} = 1,2 \text{ mm} \pm 0,1 \text{ mm}$$

When the lid is completely open, neither part shall extend beyond a plane parallel to Plane Z located above it at a height

$$l_{73} = 22,3 \text{ mm max.}$$

When the lid is in its completely open position, its front edge shall have been rotated by an angle defined by

$$a_5 = 85^\circ \begin{matrix} + 1^\circ \\ - 2^\circ \end{matrix}$$

When the lid is in partially open position, neither part shall extend beyond a plane parallel to Plane Z located above it at a height

$$l_{74} = 22,5 \text{ mm max.}$$

The path of the top of the lid as it opens shall be defined by

$$r_2 = 14,9 \text{ mm max.}$$

The start point of the incline on the case that meets the lid (figure 6) shall be defined by

$$l_{75} = 8,4 \text{ mm max.}$$

In the closed position of the lid, its height over Plane Z (figure 13) shall be

$$l_{76} = 15,2 \text{ mm} \begin{matrix} + 0,0 \text{ mm} \\ - 0,5 \text{ mm} \end{matrix}$$

and its distance from Plane X shall be

$$l_{77} = 15,3 \text{ mm} \begin{matrix} + 0,0 \text{ mm} \\ - 0,3 \text{ mm} \end{matrix}$$

In the closed position of the lid, its inside shall provide a clearance for the tape defined by

$$l_{78} = 13,15 \text{ mm} \pm 0,10 \text{ mm}$$

The top front of the lid shall be convex. The centre of the corresponding radius shall be on axis A. This radius shall be

$$r_3 = 14,7 \text{ mm max.}$$

The design of the locking mechanism is not specified by this International Standard except that it shall be operated by a release pin located in the drive. In the closed and locked position of the lid, access to the lid lock release shall be unobstructed in the shaded area (see figure 15) defined by

$$l_{79} = 2,0 \text{ mm} \pm 0,1 \text{ mm}$$

$$l_{145} = 6,3 \text{ mm} \pm 0,2 \text{ mm}$$

$$l_{146} = 1,2 \text{ mm} \pm 0,1 \text{ mm}$$

$$a_{15} = 45^\circ \pm 1^\circ$$

$$a_{16} = 15^\circ \pm 1^\circ$$

The release mechanism of the lid shall be actuated when the drive release pin is in the other shaded area of figure 15 defined by l_{79} and

$$l_{80} = 8,2 \text{ mm} \pm 0,2 \text{ mm}$$

$$l_{81} = 0,7 \text{ mm} \pm 0,2 \text{ mm}$$

$$a_6 = 15^\circ \pm 1^\circ$$

The force required to unlock the lid lock shall not exceed 0,25 N in the direction shown in figure 18.

The force required to open the lid shall not exceed 1,0 N in the direction shown in figure 19.

8.14 Cartridge reel lock (figures 10 and 16)

The reels shall be locked when the cartridge is removed from the tape drive. The design of the locking mechanism is not specified by this International Standard except that it shall meet the requirements specified below so as being able to be operated by a release pin of the drive.

The release mechanism shall be accessed through a rectangular hole of the case (figure 10) which shall be defined as follows.

- its centreline shall be parallel to Plane Y at a distance

$$l_{82} = 34,5 \text{ mm} \pm 0,1 \text{ mm}$$

- its top edge shall be parallel to Plane X at a distance

$$l_{83} = 35,85 \text{ mm} \pm 0,15 \text{ mm}$$

- its width shall be

$$l_{84} = 4,0 \text{ mm} \pm 0,1 \text{ mm}$$

- its height shall be

$$l_{85} = 6,5 \text{ mm min.}$$

The dimension of the release mechanism shall be defined by

$$l_{86} = 3,2 \text{ mm} \begin{array}{l} + 0,3 \text{ mm} \\ - 0,2 \text{ mm} \end{array}$$

$$l_{87} = 4,0 \text{ mm} \pm 0,1 \text{ mm}$$

$$a_7 = 60,0^\circ \pm 1,0^\circ$$

The reels shall be locked when the operating face of the release pin is located at a distance from Plane X defined by

$$l_{88} = 39,0 \text{ mm} \begin{array}{l} + 2,0 \text{ mm} \\ - 0,0 \text{ mm} \end{array}$$

The reels shall be unlocked when the operating face of the release pin is located at a distance from Plane X defined by

$$l_{89} = 41,75 \text{ mm} \begin{array}{l} + 0,50 \text{ mm} \\ - 0,00 \text{ mm} \end{array}$$

In this position there shall be a clearance between the locking mechanism and the inside of the rear wall of the cartridge defined by

$$l_{90} = 0,5 \text{ mm min.}$$

The pin used to move the locking mechanism shall penetrate into the cartridge over a distance of

$$l_{91} = 7,8 \text{ mm max.}$$

and the bottom edge of the slanted part of the pin shall penetrate over a distance of l_{86} min.

The rectangular cavity of the locking mechanism shall be defined by

$$l_{92} = 4,0 \text{ mm} \pm 0,1 \text{ mm}$$

$$r_4 = 0,3 \text{ mm max.}$$

The force required to unlock the reel lock in the direction shown in figure 17 shall not exceed 1,0 N.

8.15 Reel access holes (figure 10)

The case shall have two circular reel access holes which shall allow penetration of the drive spindles.

The positions of the access holes shall be defined by

$$l_{93} = 23,00 \text{ mm} \pm 0,05 \text{ mm}$$

$$l_{94} = 11,40 \text{ mm} \pm 0,05 \text{ mm}$$

$$l_{95} = 46,2 \text{ mm} \pm 0,1 \text{ mm}$$

The diameter of the holes shall be

$$d_2 = 18,80 \text{ mm} \pm 0,05 \text{ mm}$$

8.16 Interface between the reels and the drive spindles

The drive spindles (see figures 22 and 23) shall engage the reels in the area defined by

$$l_{102} = 5,4 \text{ mm} \pm 0,1 \text{ mm}$$

$$l_{103} = 4,4 \text{ mm} \pm 0,1 \text{ mm}$$

$$l_{104} = 0,6 \text{ mm max.}$$

$$d_4 = 10,00 \text{ mm} \begin{array}{l} + 0,08 \text{ mm} \\ - 0,00 \text{ mm} \end{array}$$

$$d_5 = 16,0 \text{ mm max.}$$

$$d_6 = 18,0 \text{ mm} \begin{array}{l} + 0,0 \text{ mm} \\ - 0,1 \text{ mm} \end{array}$$

$$d_7 = 16,0 \text{ mm} \begin{array}{l} + 0,0 \text{ mm} \\ - 0,1 \text{ mm} \end{array}$$

The reel engagement hole shall have a chamfer defined by

$$l_{105} = 2,4 \text{ mm} \pm 0,1 \text{ mm}$$

$$a_9 = 15^\circ \pm 1^\circ$$

The bottom of the reel on the outside edge shall have a chamfer defined by

$$l_{106} = 0,2 \text{ mm max.}$$

$$a_8 = 45^\circ \pm 1^\circ$$

The position and width of the slots with which the drive spindle will engage shall be defined by

$$l_{107} = 2,4 \text{ mm} \begin{array}{l} + 0,2 \text{ mm} \\ - 0,0 \text{ mm} \end{array}$$

$$a_{10} = 60^\circ \pm 1^\circ$$

The teeth in the reel engagement hole shall have a radius

$$r_5 = 0,2 \text{ mm max.}$$

The depth of the reel driving hole within diameter d_3 shall be

$$l_{108} = 9,4 \text{ mm min.}$$

$$d_3 = 6,50 \text{ mm} \begin{array}{l} + 0,08 \text{ mm} \\ - 0,00 \text{ mm} \end{array}$$

When the cartridge is within the drive, the tape centre line shall be in a plane parallel to Plane Z at a distance

$$l_{109} = 7,05 \text{ mm} \pm 0,10 \text{ mm}$$

and the Support areas of the reels shall be at a distance from Plane Z defined by

$$l_{110} = 0,6 \text{ mm} \pm 0,2 \text{ mm}$$

The penetration of the reel drive spindle into the reel shall be defined by

$$l_{111} = 7,5 \text{ mm max.}$$

$$l_{112} = 8,0 \text{ mm max.}$$

$$a_{11} = 60^\circ \pm 1^\circ$$

When the cartridge is mounted within the drive, so that the Support areas are at a distance l_{110} from Plane Z, a force $F = 0,6 \text{ N} \pm 0,2 \text{ N}$ shall be exerted on the cartridge in the direction shown in figure 23.

8.17 Light path (figures 10, 12, 20 and 21)

A light path shall be provided for sensing the leader and trailer tapes. When the lid is open, an unobstructed light path shall exist from the d_{10} diameter light path hole to the outside of the cartridge via square windows in the light path hole (see cross-section D-D in figure 12) and the light window in the cartridge lid.

The centre of the light path hole shall be defined by l_{82} and

$$l_{115} = 8,35 \text{ mm} \pm 0,10 \text{ mm}$$

The diameter of the light path hole shall be

$$d_{10} = 6,5 \text{ mm} \begin{array}{l} + 0,3 \text{ mm} \\ - 0,0 \text{ mm} \end{array}$$

The light path hole shall have a chamfer defined by

$$\begin{array}{l} l_{116} = 0,5 \text{ mm max.} \\ a_{12} = 45^\circ \pm 1^\circ \end{array}$$

The position and size of the square window on each side of the light path hole shall be defined by

$$\begin{array}{l} l_{117} = 6,05 \text{ mm} \pm 0,10 \text{ mm} \\ l_{118} = 2,5 \text{ mm} \begin{array}{l} + 0,4 \text{ mm} \\ - 0,0 \text{ mm} \end{array} \end{array}$$

where l_{118} is the length of the side of the square window.

The hole shall be deep enough to allow penetration of a light emitter over a distance of

$$l_{119} = 12,5 \text{ mm min.}$$

The angle of the light path shall be

$$a_{13} = 5,50^\circ \pm 0,25^\circ$$

The position and size of the cartridge lid window shall be

$$\begin{array}{l} l_{120} = 3,8 \text{ mm} \pm 0,1 \text{ mm} \\ l_{121} = 2,5 \text{ mm} \begin{array}{l} + 0,4 \text{ mm} \\ - 0,0 \text{ mm} \end{array} \\ l_{122} = 6,05 \text{ mm} \pm 0,10 \text{ mm} \end{array}$$

8.18 Position of the tape in the case (figure 21)

The tape shall run between two guide surfaces in a plane parallel to Plane X and l_{123} from it.

$$l_{123} = 13,15 \text{ mm} \pm 0,10 \text{ mm}$$

The guide surfaces shall have a radius of r_6 and shall be tangential, as shown in figure 21, to lines tangential to the reel hubs that extend to points outside the case.

$$r_6 = 3,0 \text{ mm} \pm 0,1 \text{ mm}$$

These points shall be defined by

$$\begin{array}{l} l_{124} = 76,28 \text{ mm} \pm 0,30 \text{ mm} \\ l_{125} = 27,15 \text{ mm} \pm 0,20 \text{ mm} \\ l_{126} = 31,15 \text{ mm} \pm 0,20 \text{ mm} \\ l_{127} = 9,67 \text{ mm} \pm 0,10 \text{ mm} \end{array}$$

8.19 Tape path zone

When the cartridge is inserted into the drive, the tape is pulled outside the case by tape guides and is no longer in contact with the guide surfaces. The tape path zone (see figure 21) of the case is the zone in which the tape shall be able to move freely. This zone shall be maintained for both sides of the case and shall be defined by l_{124} to l_{127} and

$$l_{128} = 23,0 \text{ mm} \pm 0,1 \text{ mm}$$

$$l_{130} = 46,2 \text{ mm} \pm 0,2 \text{ mm}$$

$$l_{131} = 11,4 \text{ mm} \pm 0,1 \text{ mm}$$

The clearance between the tape and the guides shall be defined by

$$l_{129} = 0,3 \text{ mm min.}$$

$$l_{132} = 0,3 \text{ mm min.}$$

8.20 Tape access cavity (figure 10)

When the cartridge is inserted into the drive, tape guides in the drive pull the tape into the drive tape path. The two radii r_7 are centred on Datum holes A and B. The shape and dimensions of the access cavity for these tape guides shall be defined by l_{63} and l_{64} , and the following

$$r_7 = 2,3 \text{ mm} \pm 0,1 \text{ mm}$$

The two radii r_8 are centred on the centres of the reel access holes.

$$r_8 = 24,15 \text{ mm} \pm 0,10 \text{ mm}$$

$$l_{133} = 3,85 \text{ mm} \pm 0,10 \text{ mm}$$

8.21 Tape access cavity clearance (figure 24)

The case design shall provide clearance for drive tape threading mechanisms. This clearance shall be defined by

$$l_{134} = 1,2 \text{ mm max.}$$

$$l_{135} = 1,15 \text{ mm} \begin{array}{l} + 0,20 \text{ mm} \\ - 0,00 \text{ mm} \end{array}$$

$$l_{136} = 14,0 \text{ mm} \begin{array}{l} + 0,0 \text{ mm} \\ - 0,2 \text{ mm} \end{array}$$

$$l_{137} = 66,8 \text{ mm min.}$$

$$l_{138} = 10,0 \text{ mm min.}$$

$$l_{139} = 66,8 \text{ mm min.}$$

$$l_{140} = 1,2 \text{ mm max}$$

$$a_{14} = 49^\circ \text{ max.}$$

$$l_{141} = 14,8 \text{ mm min.}$$

$$l_{159} = 13,0 \text{ mm min.}$$

$$l_{170} = 4,0 \text{ mm max.}$$

8.22 Requirements for the MIC (figures 25 and 26)

The MIC shall be a chip built into the case (See annex L). It can be accessed through five Access Holes. The MIC shall be mounted in the case so that, when inserted into the drive, the contacts of the drive match those of the MIC when they penetrate into the five Access Holes by at least 1,70 mm. The interface shall be I²C.™

The positions and dimensions of these Access Holes are as follows.

Access Hole GND

$$l_{165} = 67,2 \text{ mm} \begin{array}{l} + 0,0 \text{ mm} \\ - 0,2 \text{ mm} \end{array}$$

$$l_{166} = 69,0 \text{ mm} \begin{array}{l} + 0,2 \text{ mm} \\ - 0,0 \text{ mm} \end{array}$$

Access Hole SCL

$$l_{167} = 70,0 \text{ mm} \begin{array}{l} + 0,0 \text{ mm} \\ - 0,2 \text{ mm} \end{array}$$

$$l_{168} = 71,8 \text{ mm} \begin{array}{l} + 0,2 \text{ mm} \\ - 0,0 \text{ mm} \end{array}$$

Access Hole ID

$$l_{169} = 72,8 \text{ mm} \begin{array}{l} + 0,0 \text{ mm} \\ - 0,2 \text{ mm} \end{array}$$

$$l_{147} = 74,6 \text{ mm} \begin{array}{l} + 0,2 \text{ mm} \\ - 0,0 \text{ mm} \end{array}$$

Access Hole SDA

$$l_{148} = 75,6 \text{ mm} \begin{array}{l} + 0,0 \text{ mm} \\ - 0,2 \text{ mm} \end{array}$$

$$l_{149} = 77,4 \text{ mm} \begin{array}{l} + 0,2 \text{ mm} \\ - 0,0 \text{ mm} \end{array}$$

Access Hole Vcc

$$l_{150} = 78,4 \text{ mm} \begin{array}{l} + 0,0 \text{ mm} \\ - 0,2 \text{ mm} \end{array}$$

$$l_{151} = 80,2 \text{ mm} \begin{array}{l} + 0,2 \text{ mm} \\ - 0,0 \text{ mm} \end{array}$$

The following dimensions shall apply to all Access Holes.

$$l_{152} = 5,1 \text{ mm} \begin{array}{l} + 0,2 \text{ mm} \\ - 0,0 \text{ mm} \end{array}$$

$$l_{153} = 1,4 \text{ mm} \begin{array}{l} + 0,3 \text{ mm} \\ - 0,1 \text{ mm} \end{array}$$

There shall be a chamfer around the outside of these holes defined by

$$l_{154} = 0,4 \text{ mm} \pm 0,1 \text{ mm}$$

$$a_{17} = 45^\circ \pm 1^\circ$$

When the cartridge is inserted into the drive, the pin used to recognise the cartridge penetrates through Recognition hole 3. The cavity shown shaded in cross-section N-N in figure 26 is required for this pin. This cavity shall be defined by l_{143} , l_{144} and

$$l_{157} = 5,0 \text{ mm min.}$$

$$l_{158} = 1,5 \text{ mm max.}$$

$$l_{160} = 45,4 \text{ mm min.}$$

8.23 Recognition recesses (figures 8 and 10)

The cartridge shall have two recesses on the rear side. These recesses are used to recognise the cartridge in a library system. They shall be defined by

$l_{161} = 8,4 \text{ mm}$	+ 0,0 mm
	- 0,2 mm
$l_{162} = 6,0 \text{ mm}$	+ 0,2 mm
	- 0,0 mm
$l_{163} = 2,0 \text{ mm}$	+ 0,2 mm
	- 0,0 mm
$l_{164} = 2,0 \text{ mm}$	+ 0,2 mm
	- 0,1 mm

IECNORM.COM : Click to view the full PDF of ISO/IEC 18810:2001

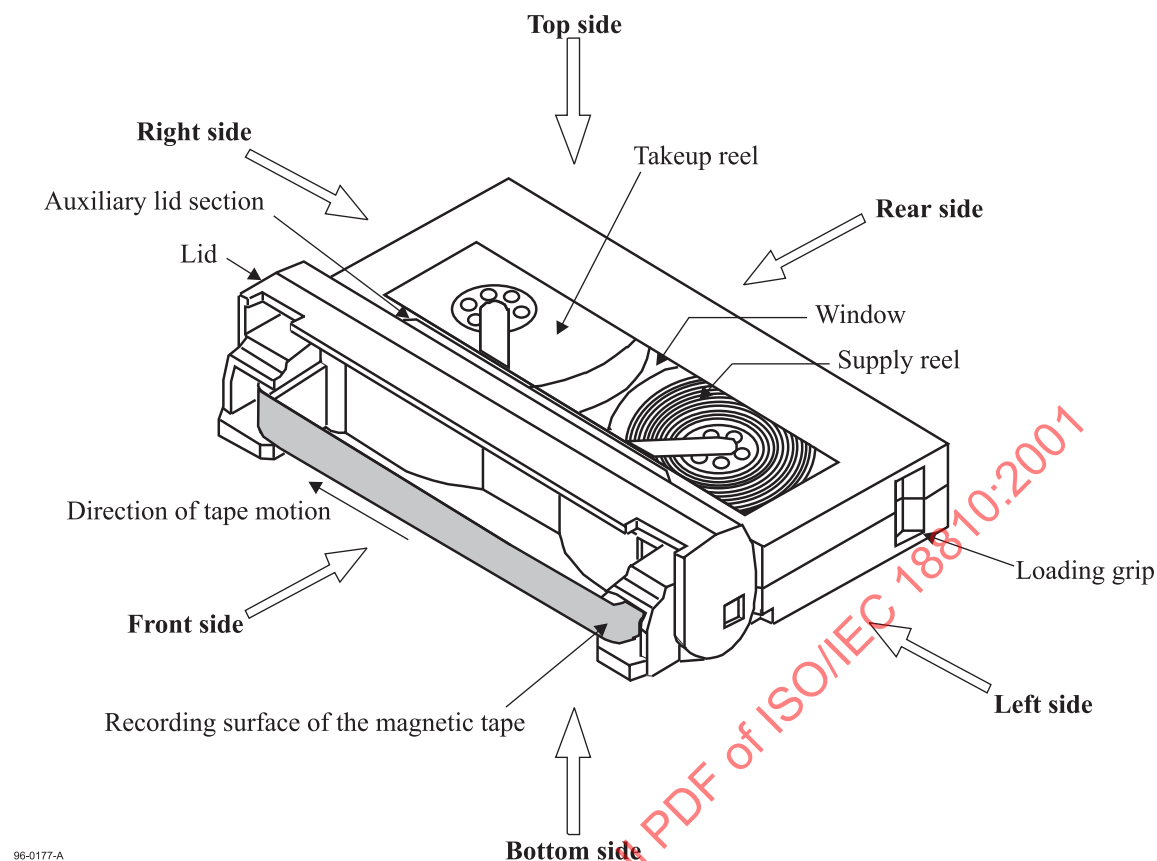


Figure 1 - Tape cartridge assembly, top view, lid open


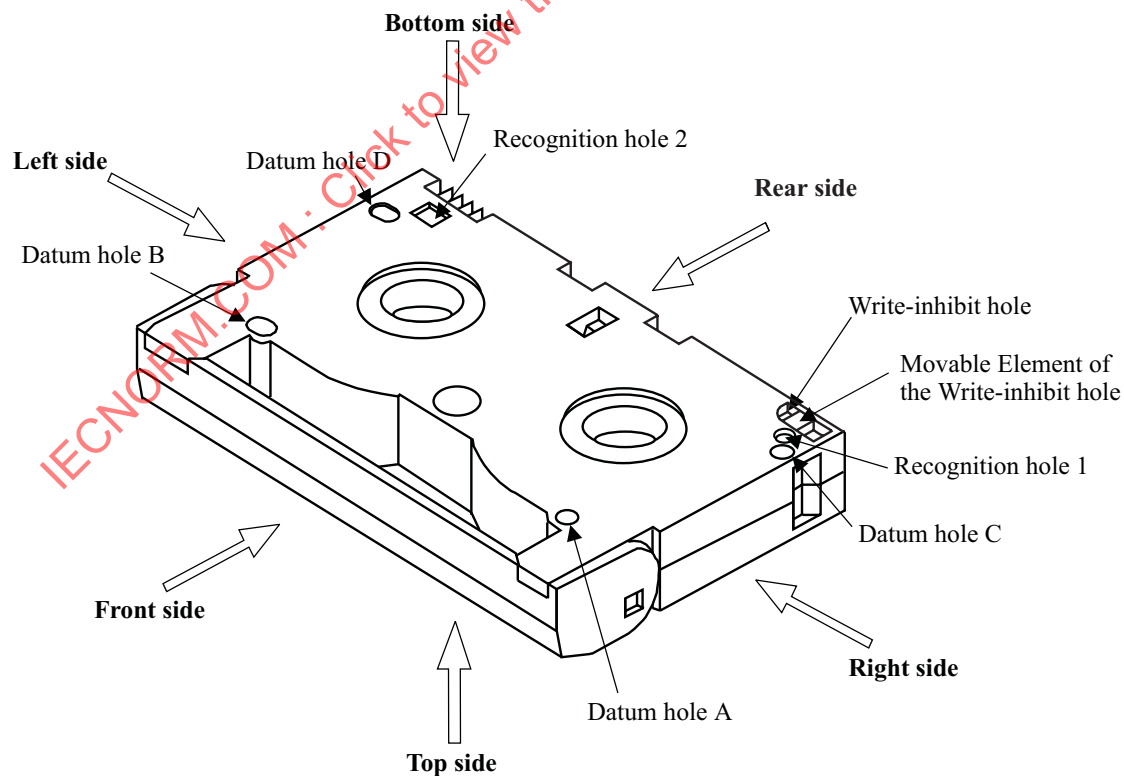



Figure 2 - Tape cartridge assembly, bottom view, lid closed



99-0057-A


Figure 3 - Reference Planes X, Y, Z

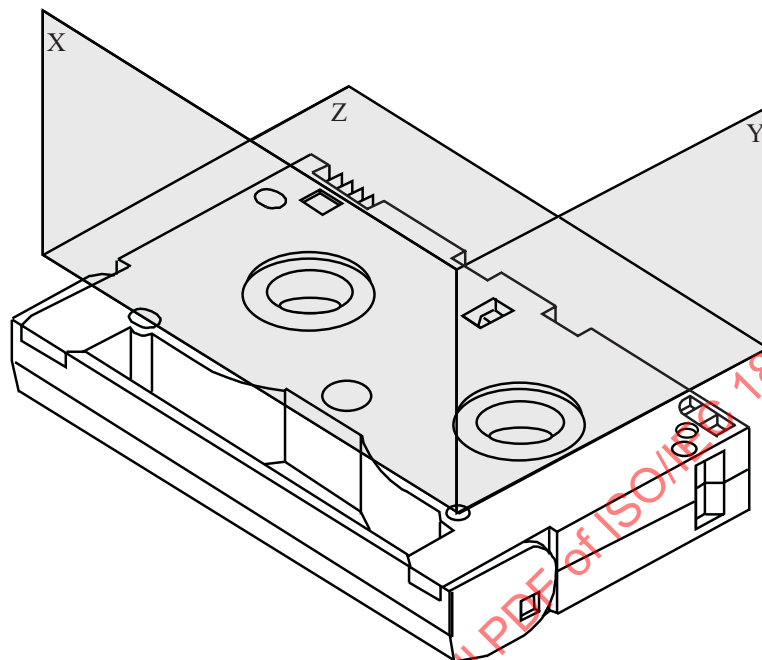

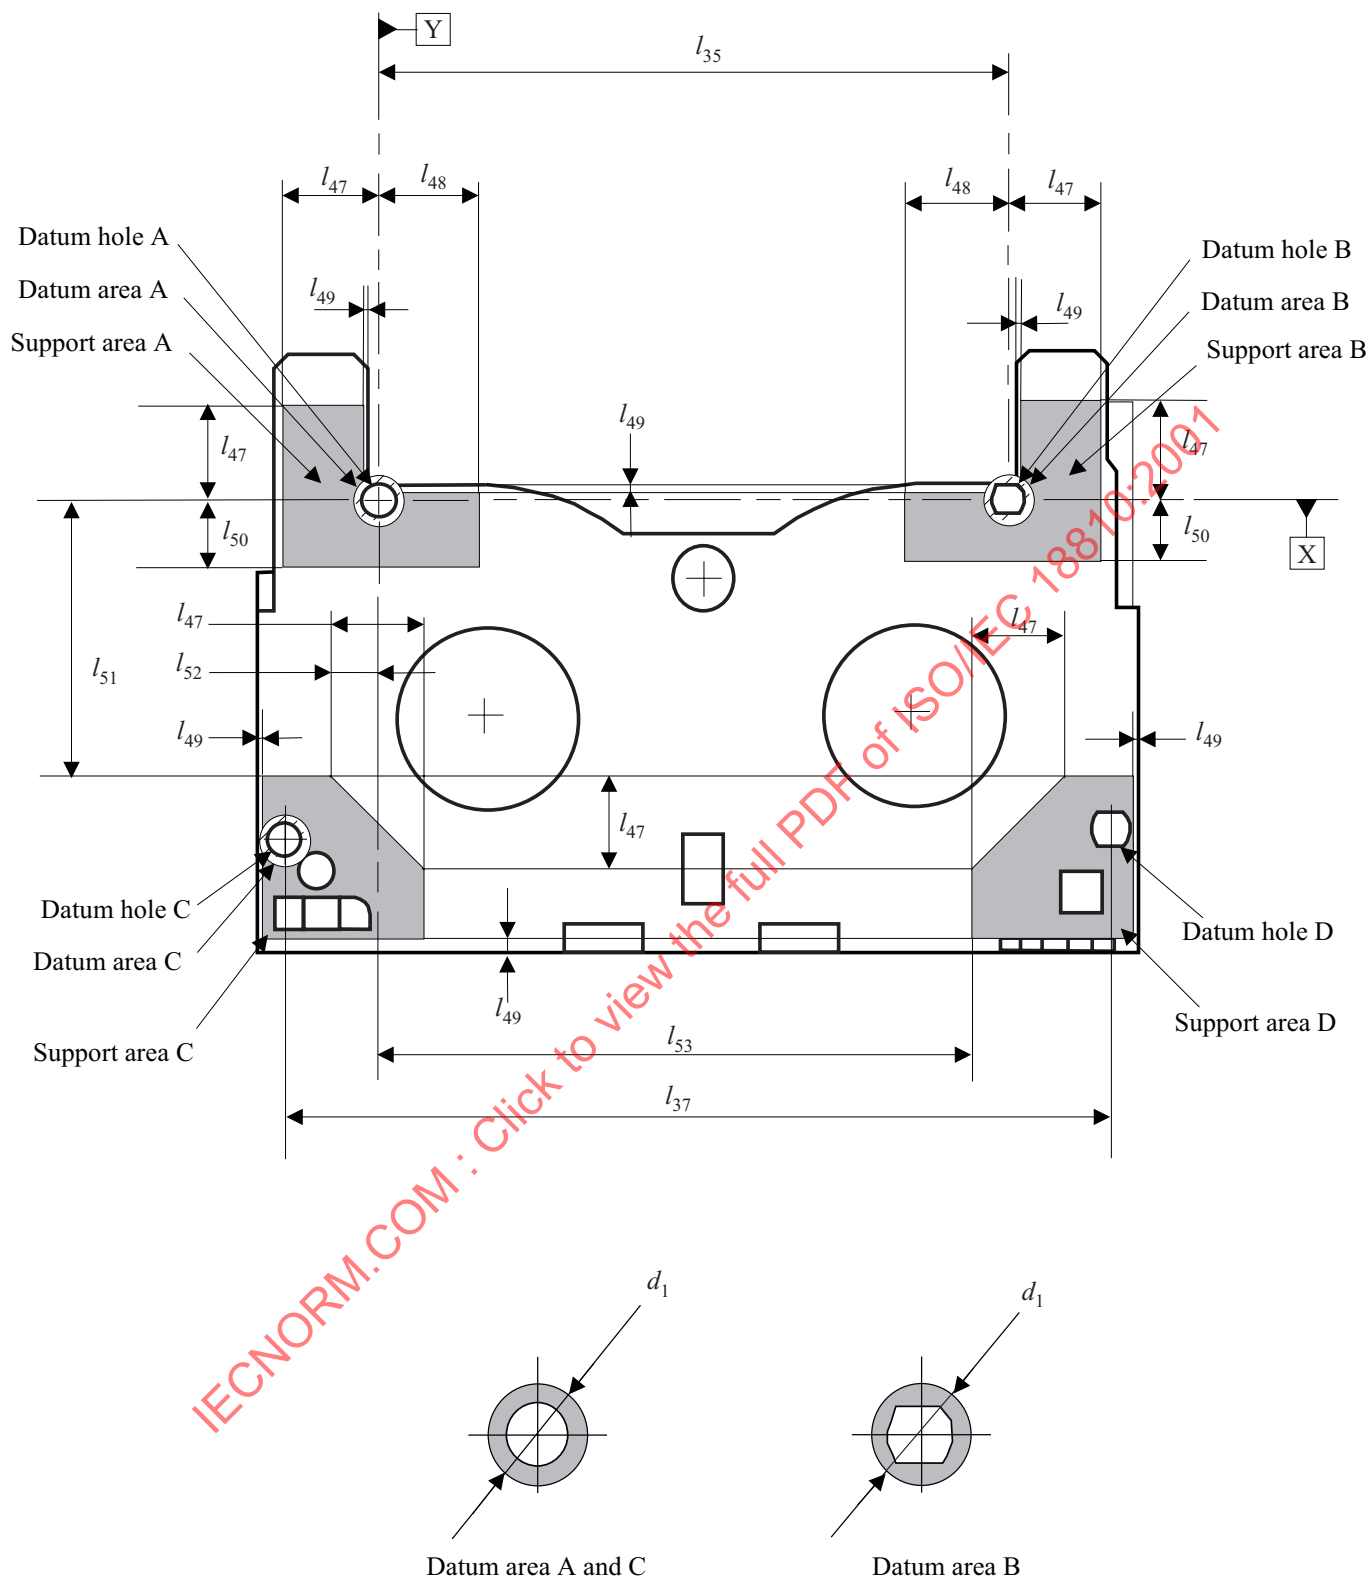


99-0059-A

Figure 9 - Bottom side, Datum and Support areas

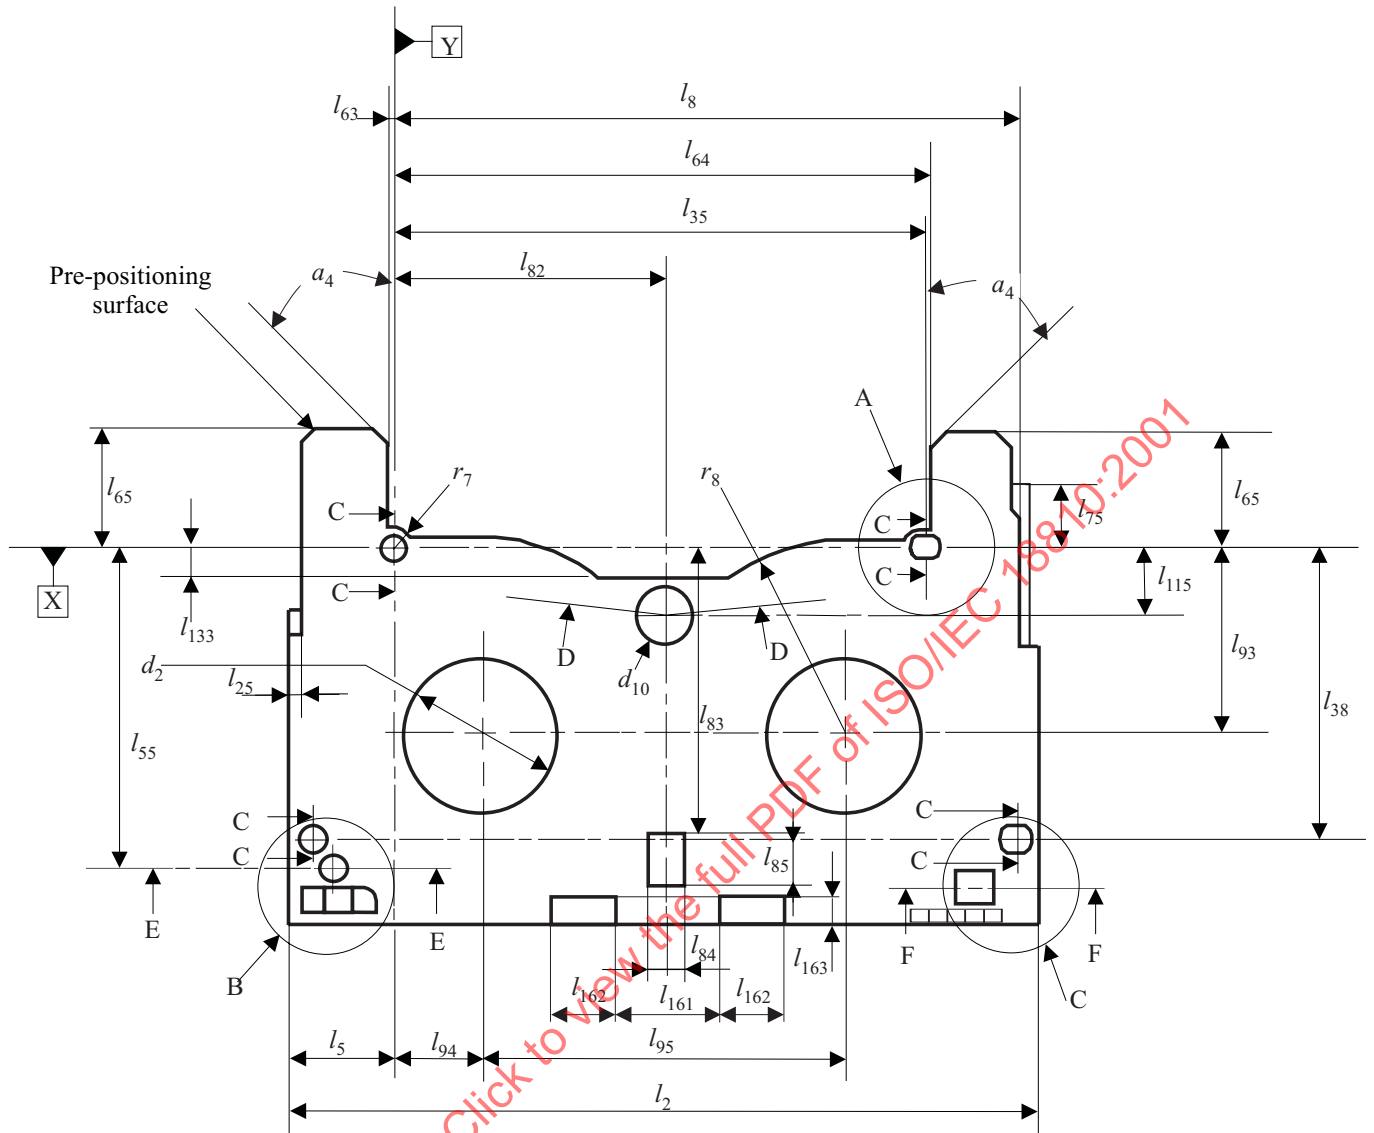


99-0060-A

Figure 10 - Bottom side, lid removed

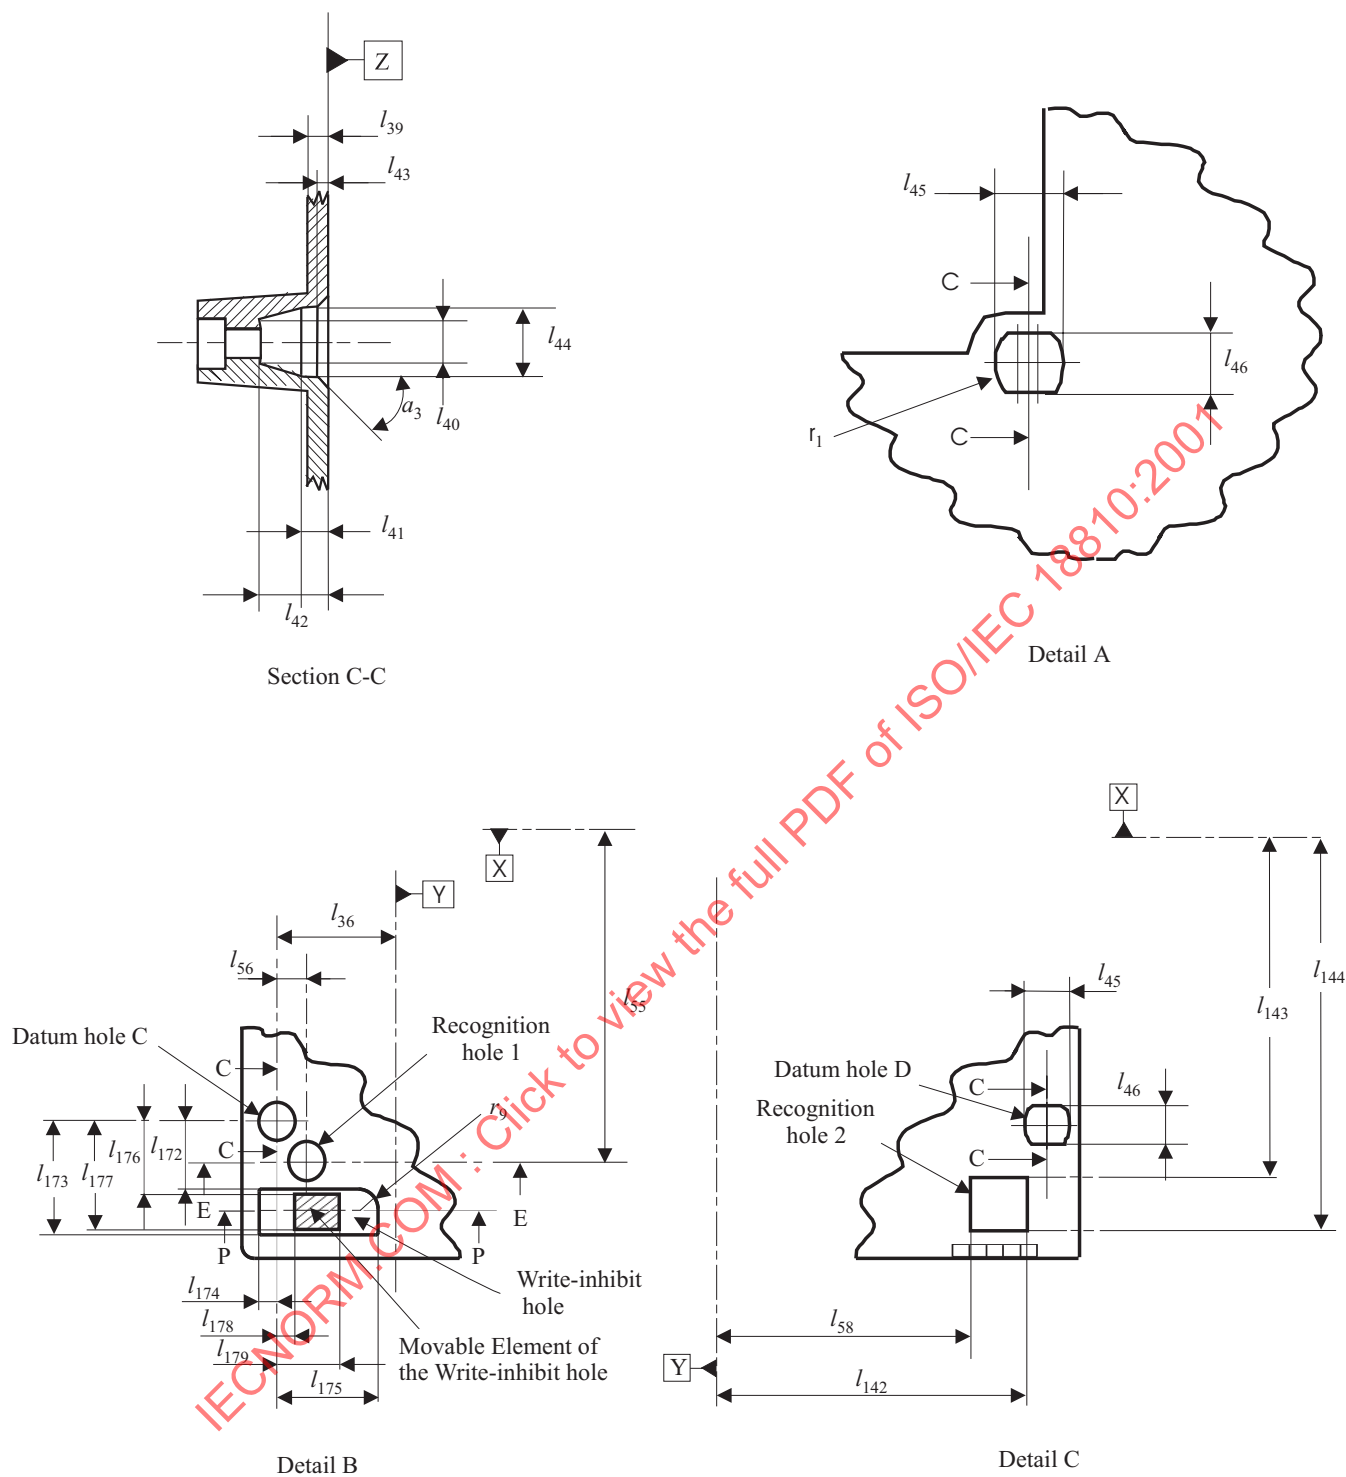


99-0061-A

Figure 11 - Details of the Datum, Recognition and Write-inhibit holes

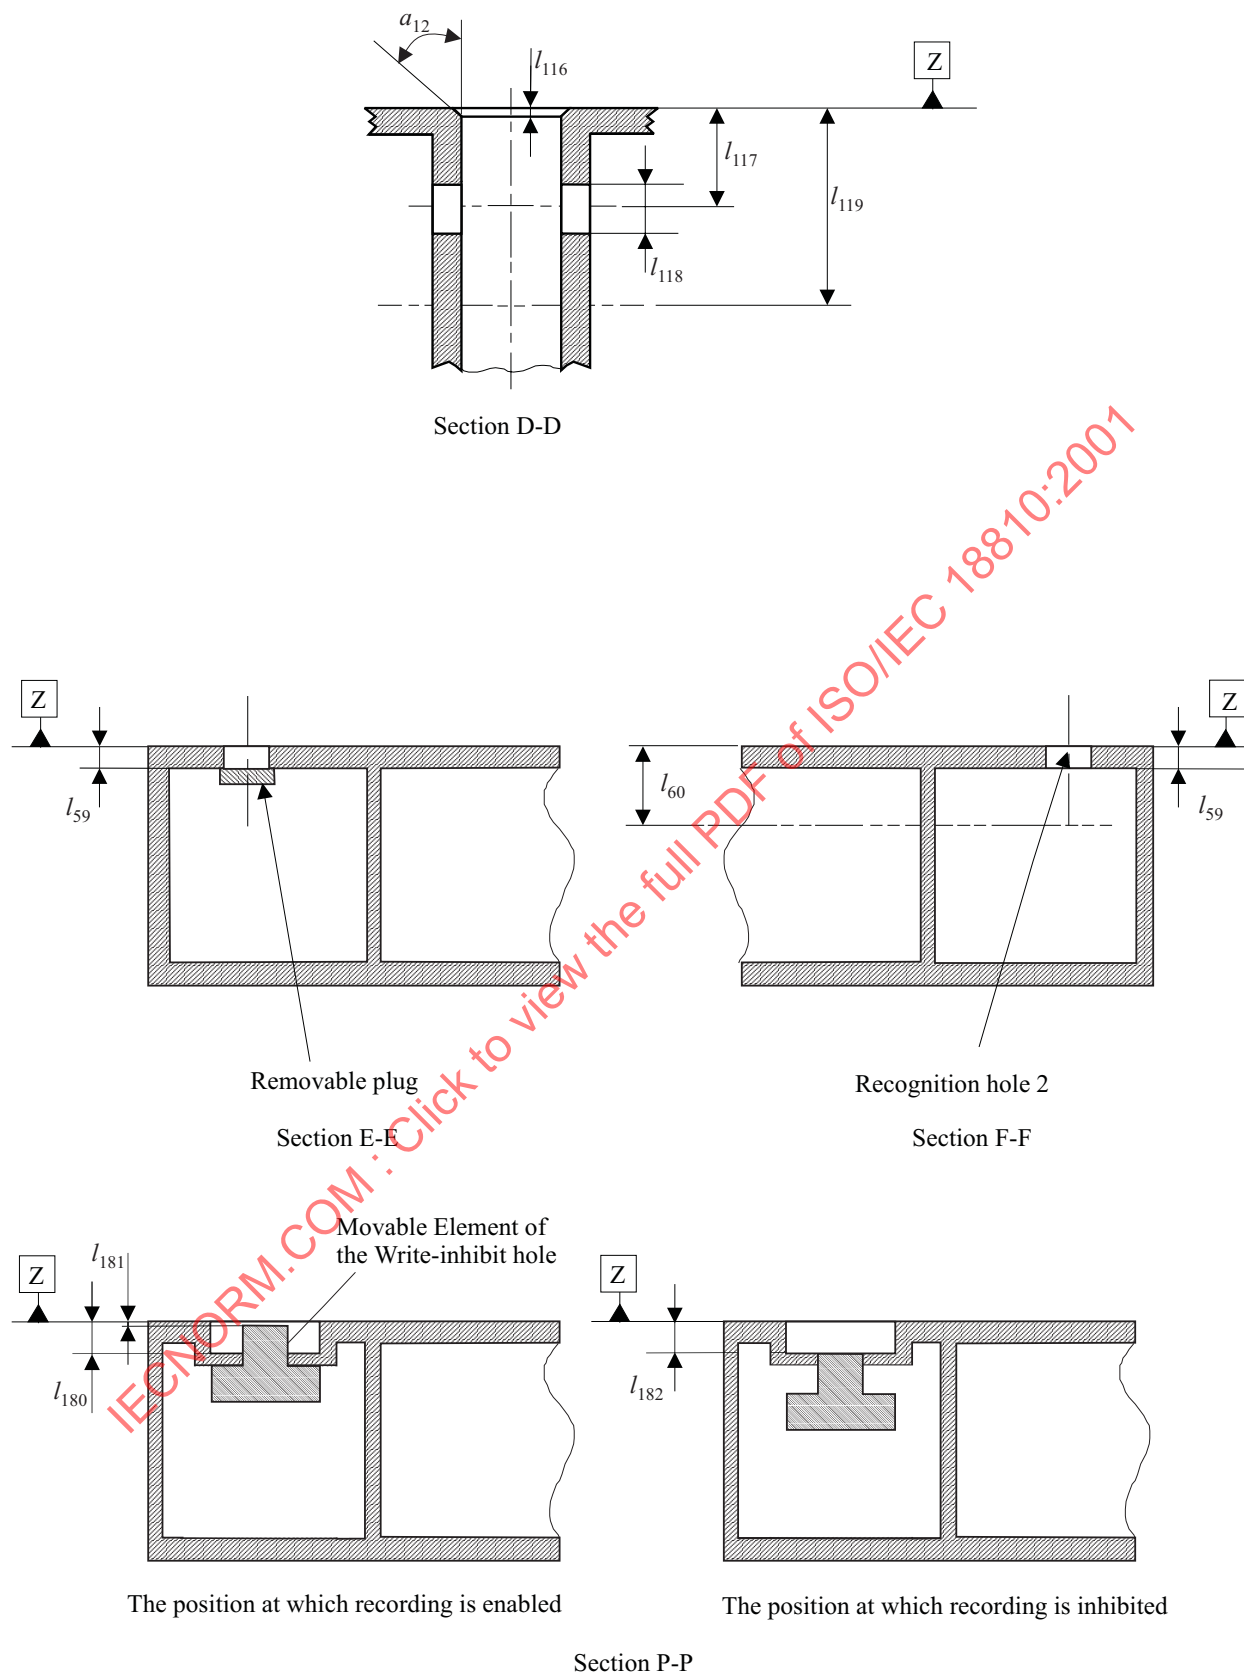


99-0062-A


Figure 12 - Cross-sections showing the light path hole, the Recognition and Write-inhibit holes

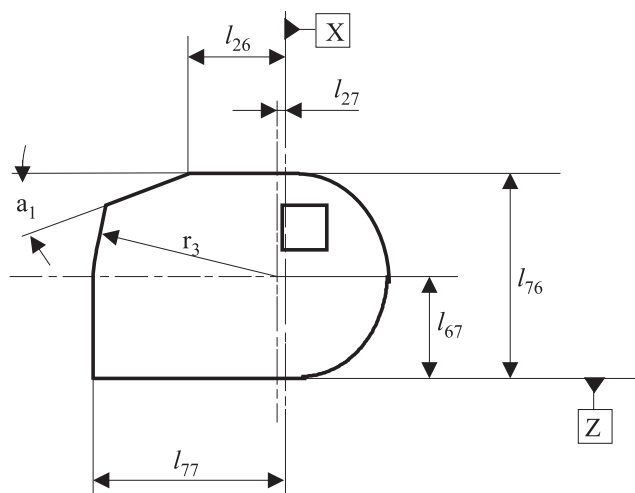


Details of the side of the lid

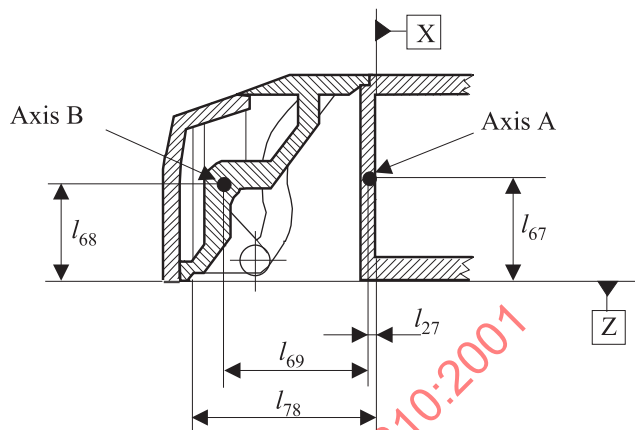

Internal structure of the lid

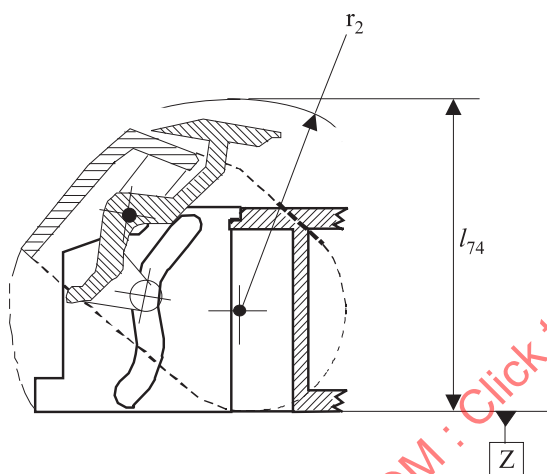

Lid configuration
when rotating

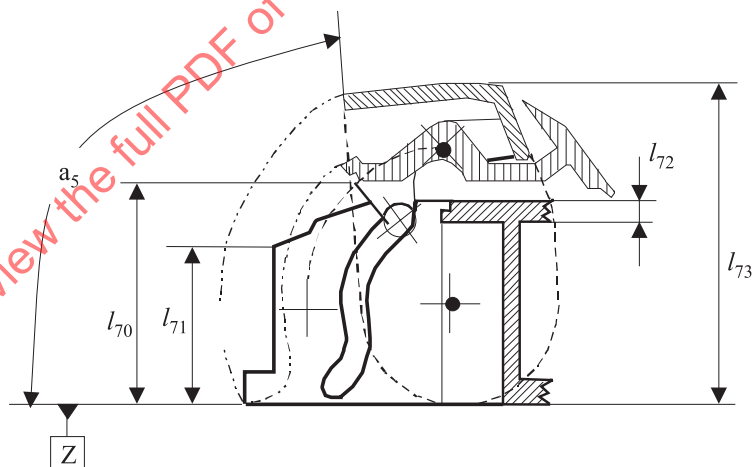

Lid configuration
when the lid is open

Figure 13 - Lid

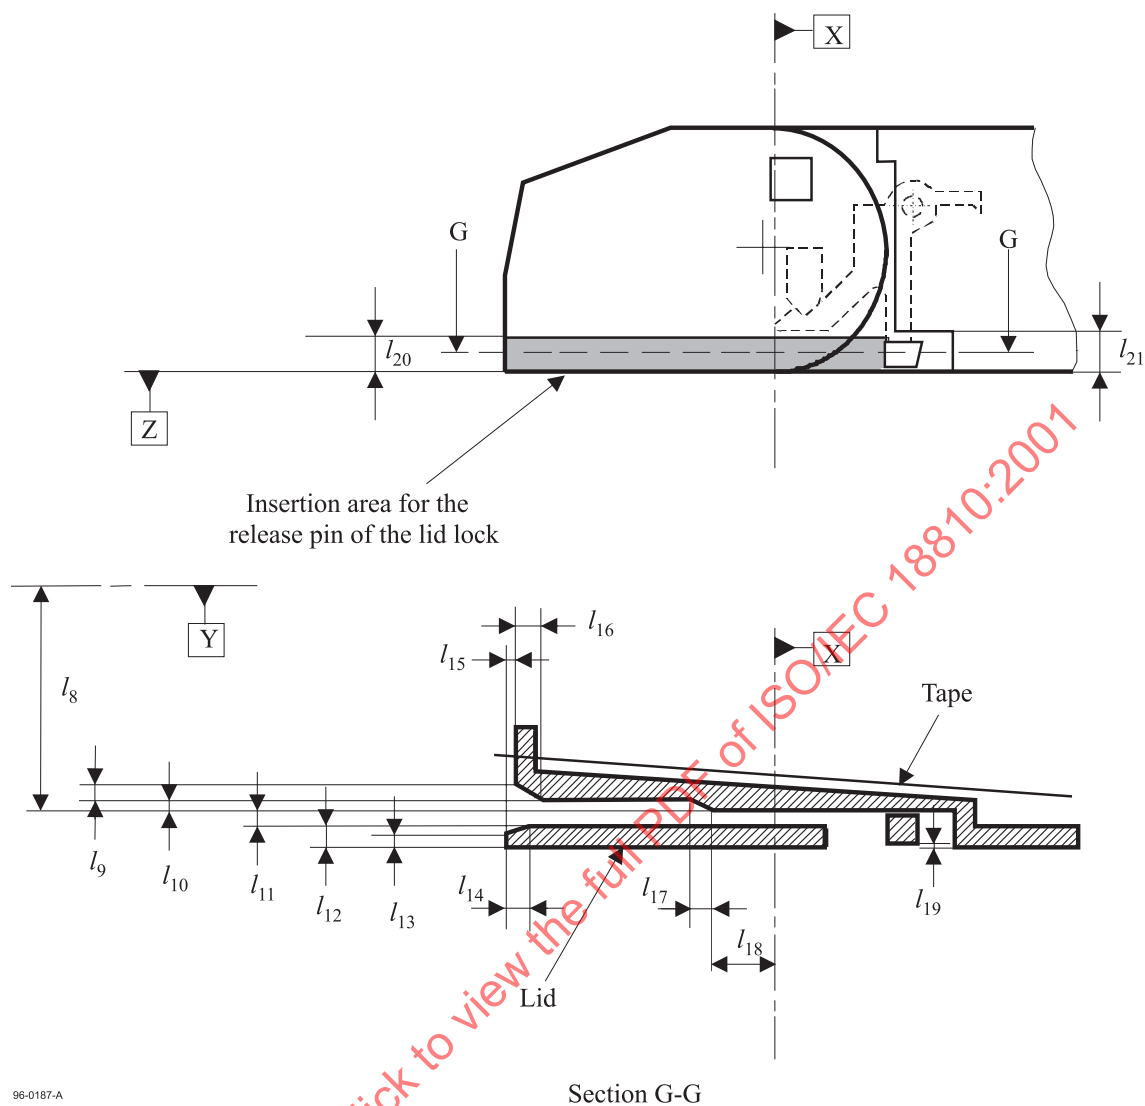


Figure 14 - Lid release insertion channel



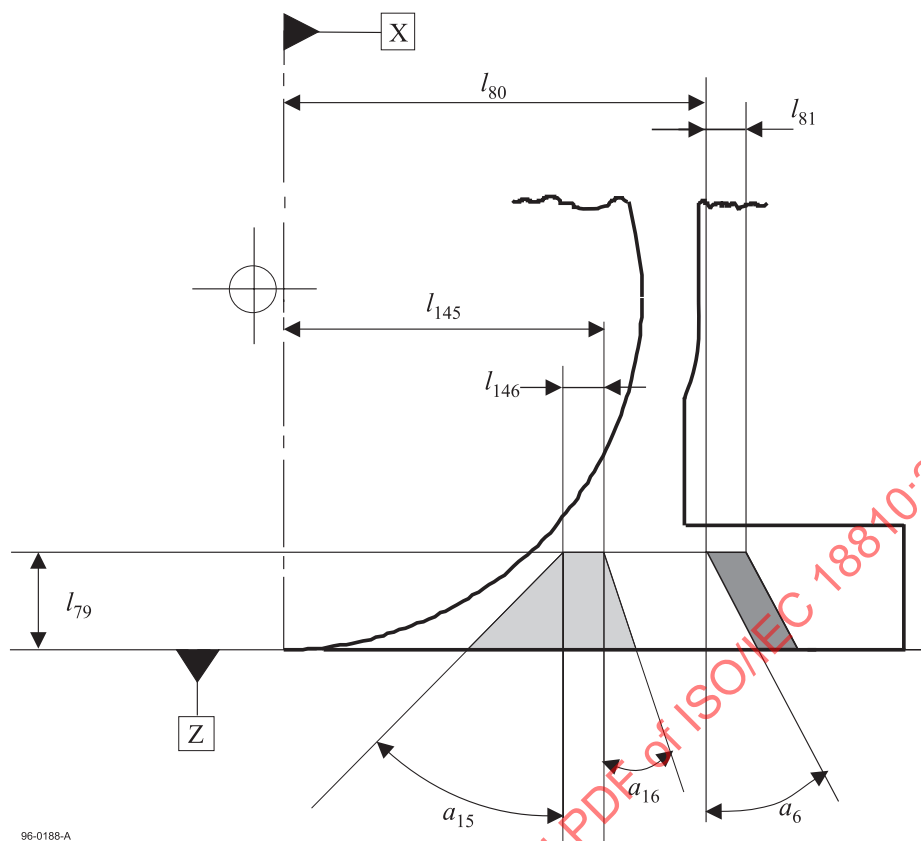


Figure 15 - Lid release requirements

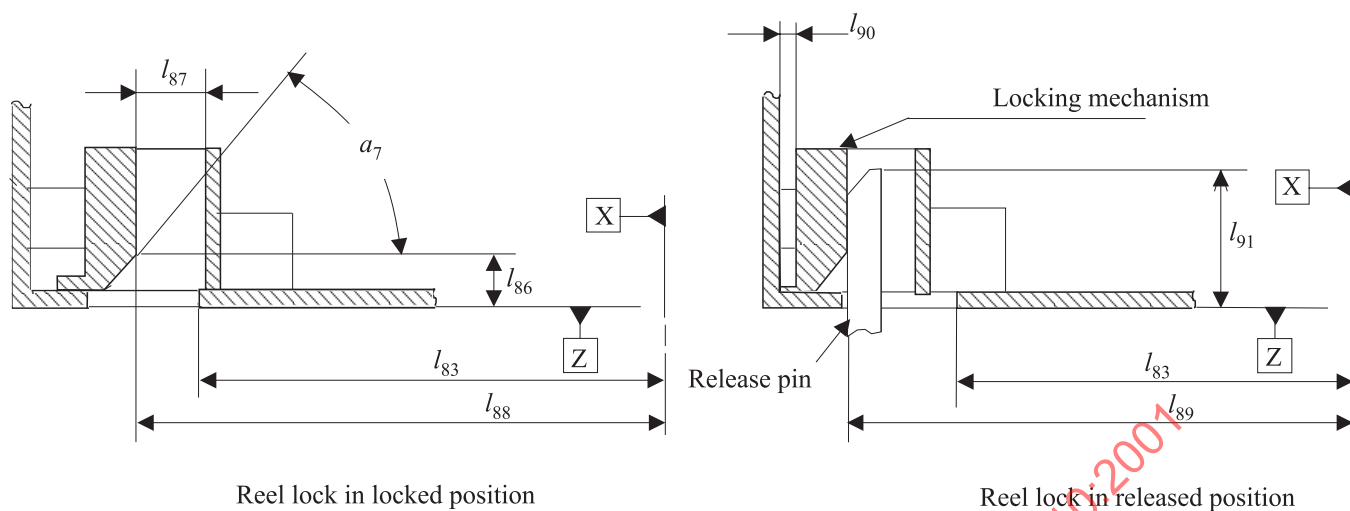


Section L-L of figure 21

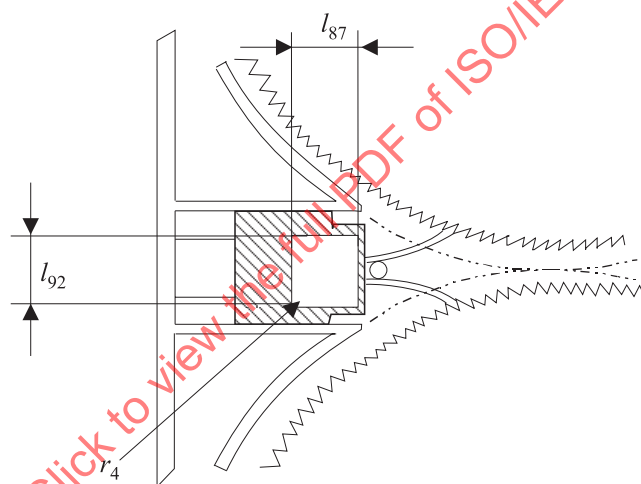

Detail E
of figure 21


Figure 16 - Reel lock release

96-0189-A

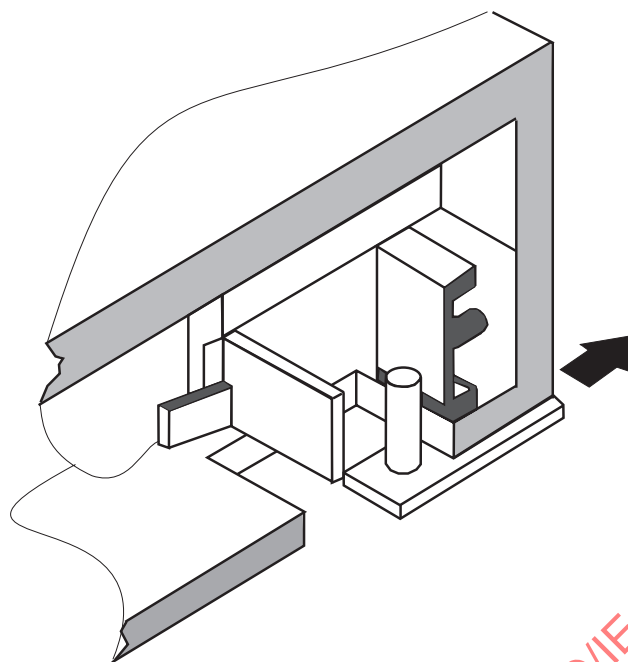


96-0190-A

Figure 17 - Direction of the force needed to unlock the reel lock

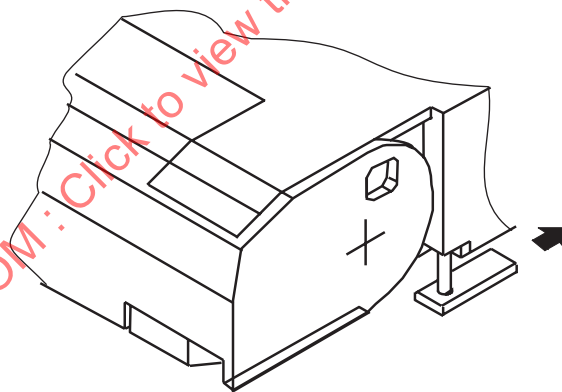


96-0191-A

Figure 18 - Direction of the force needed to unlock the lid lock

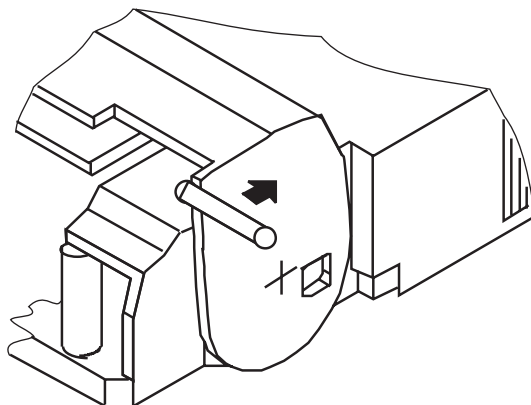


96-0192-A

Figure 19 - Direction of the force needed to open the lid

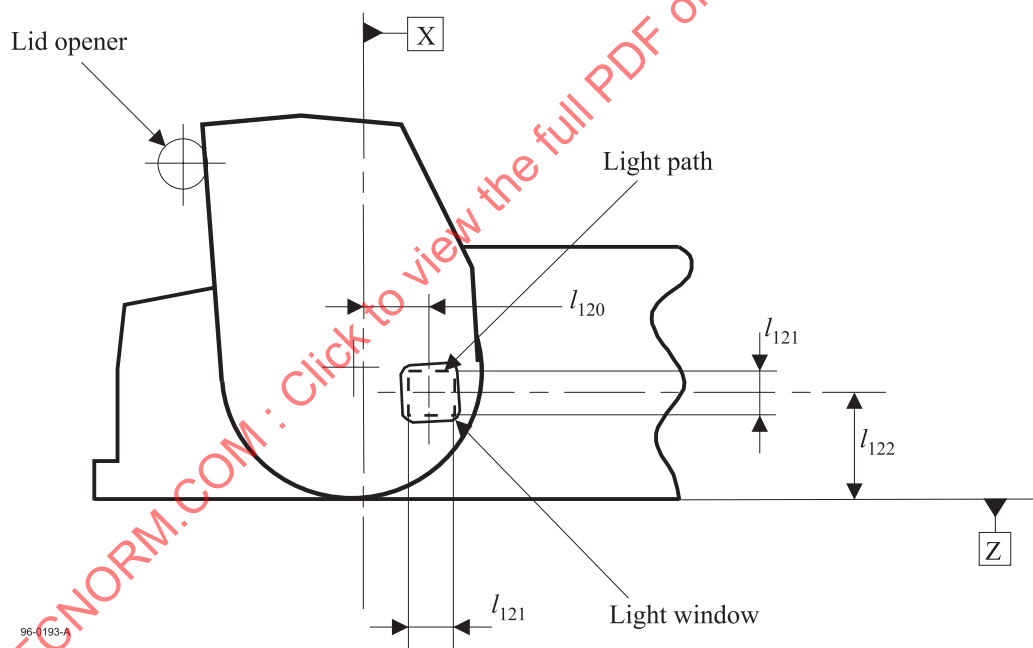

96-0193-A

Figure 20 - Light path and light windows

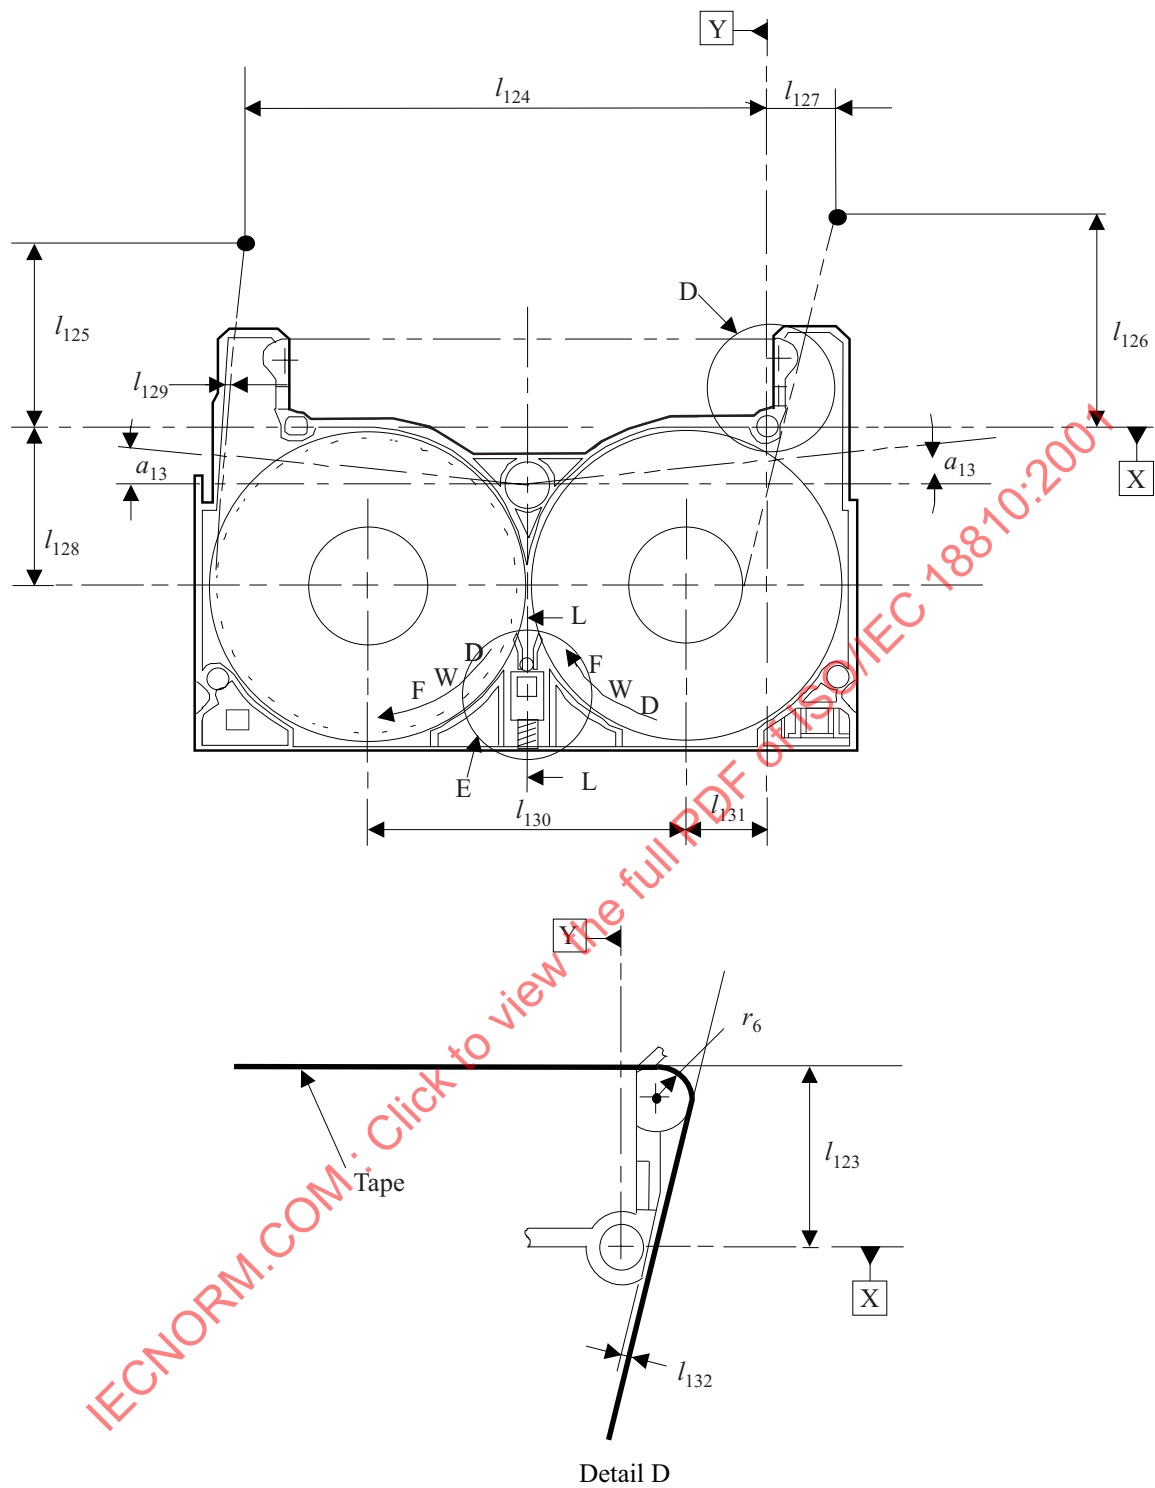

99-0063-A

Figure 21 - Internal tape path and light path

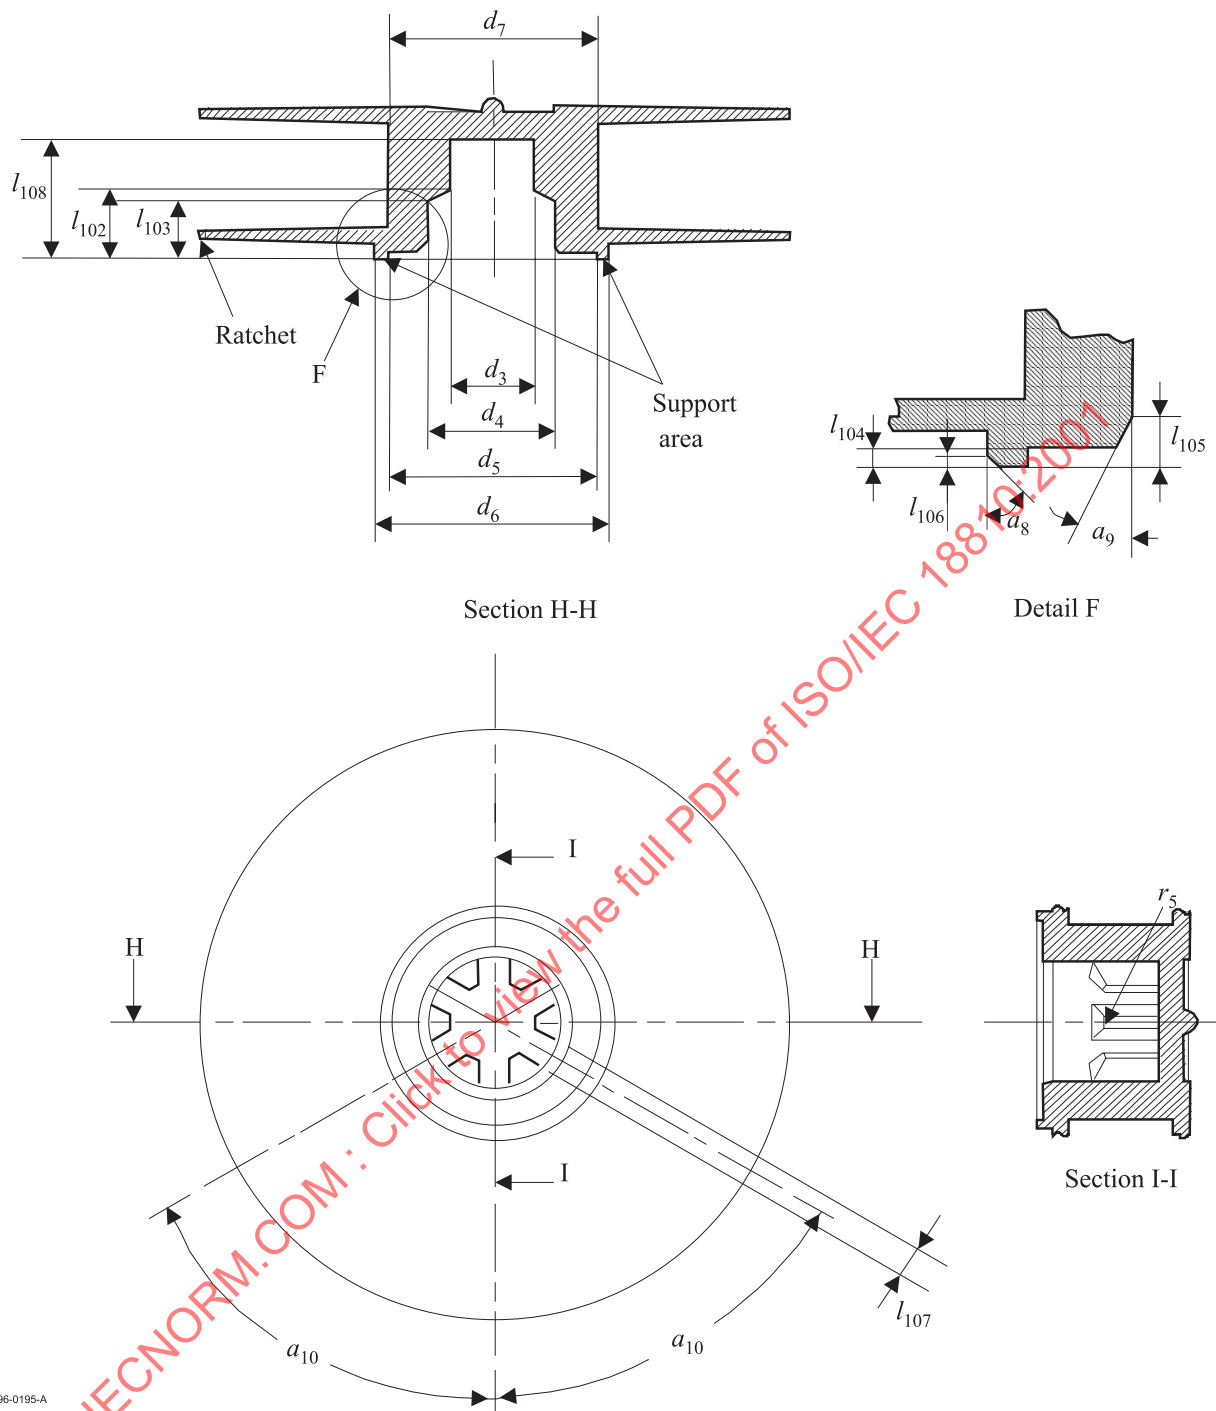


Figure 22 - Cartridge reel

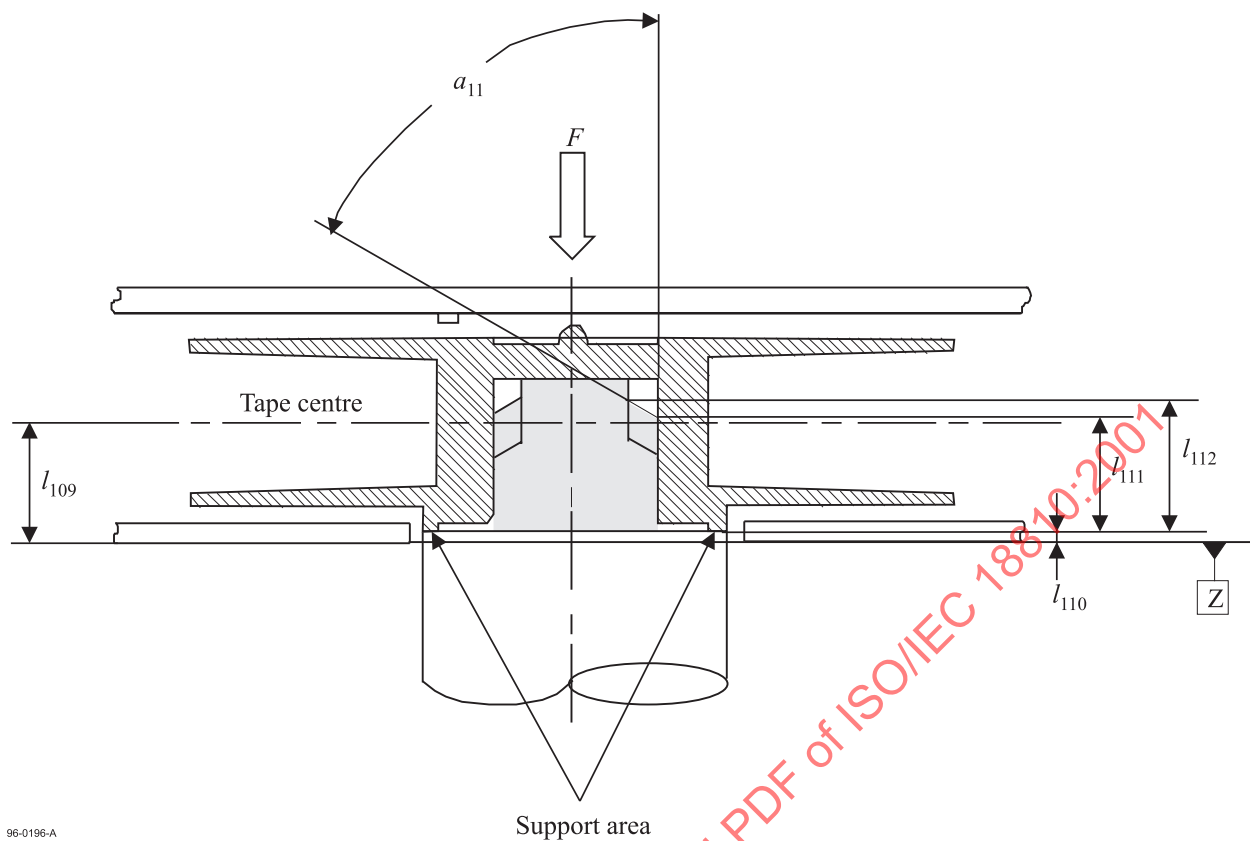


Figure 23 - Interface with the drive spindle



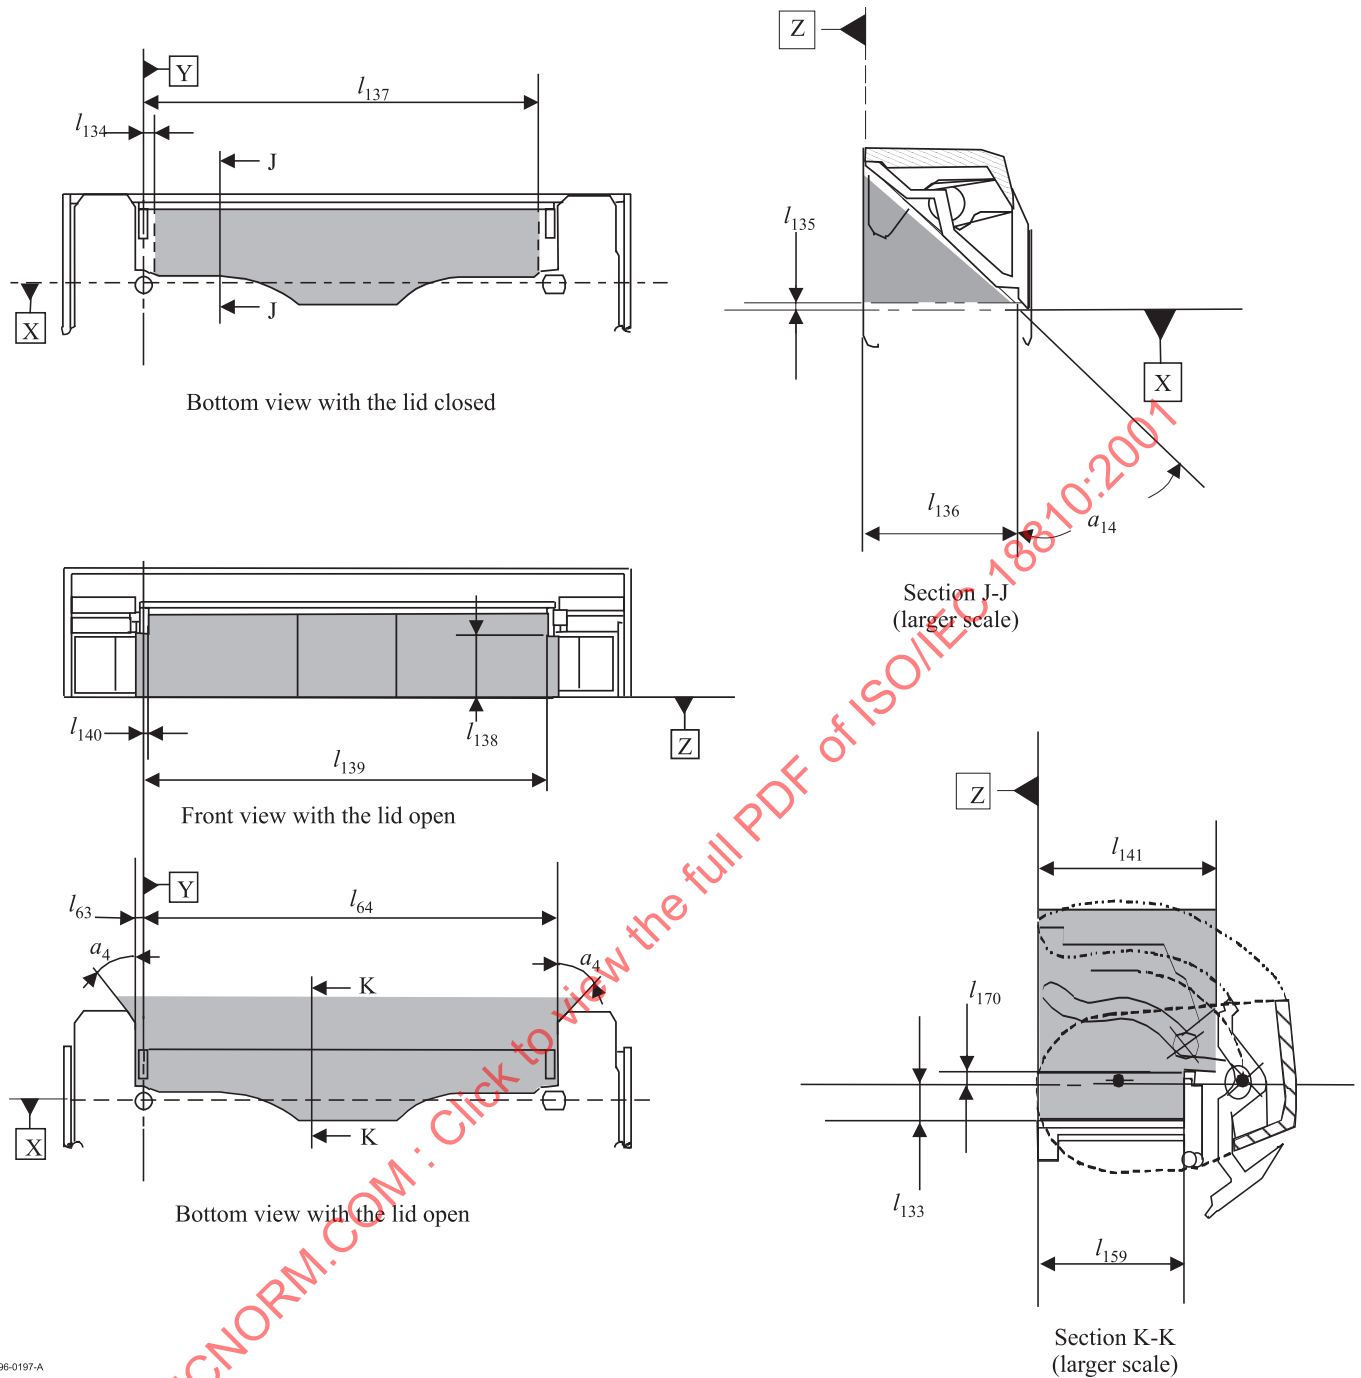


Figure 24 - Tape access cavity clearance

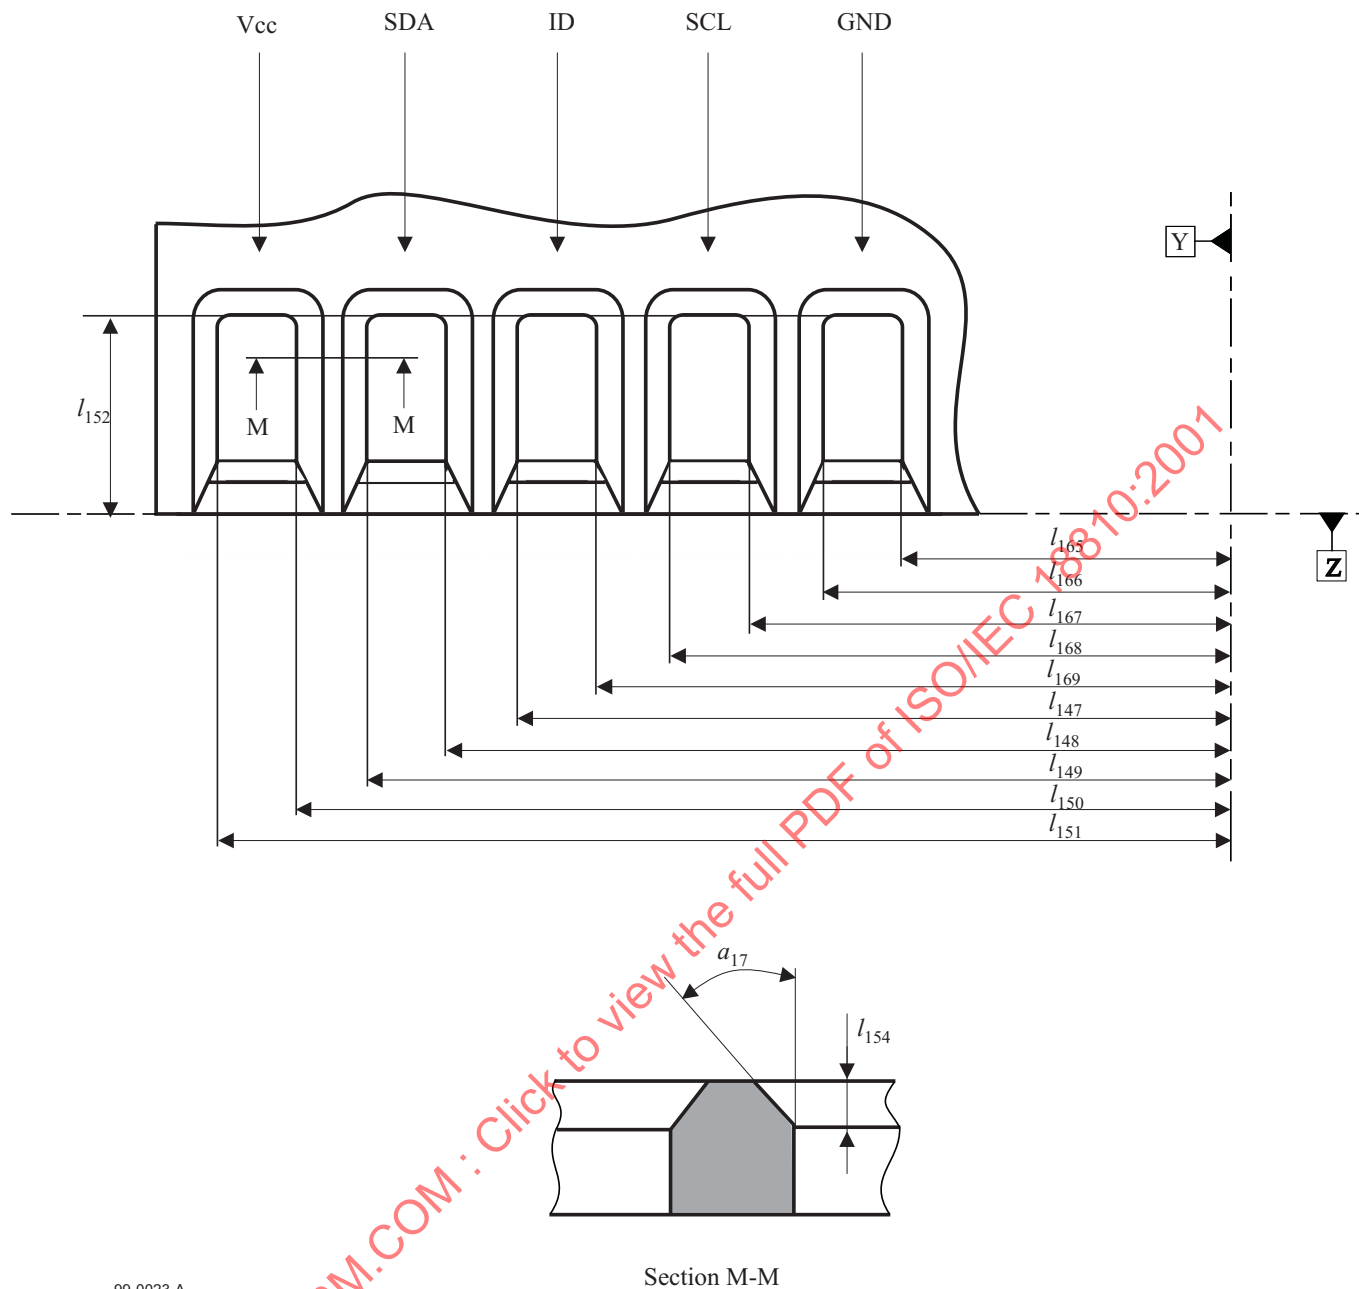

99-0023-A

Figure 25 - MIC access holes, enlarged partial view, rear side

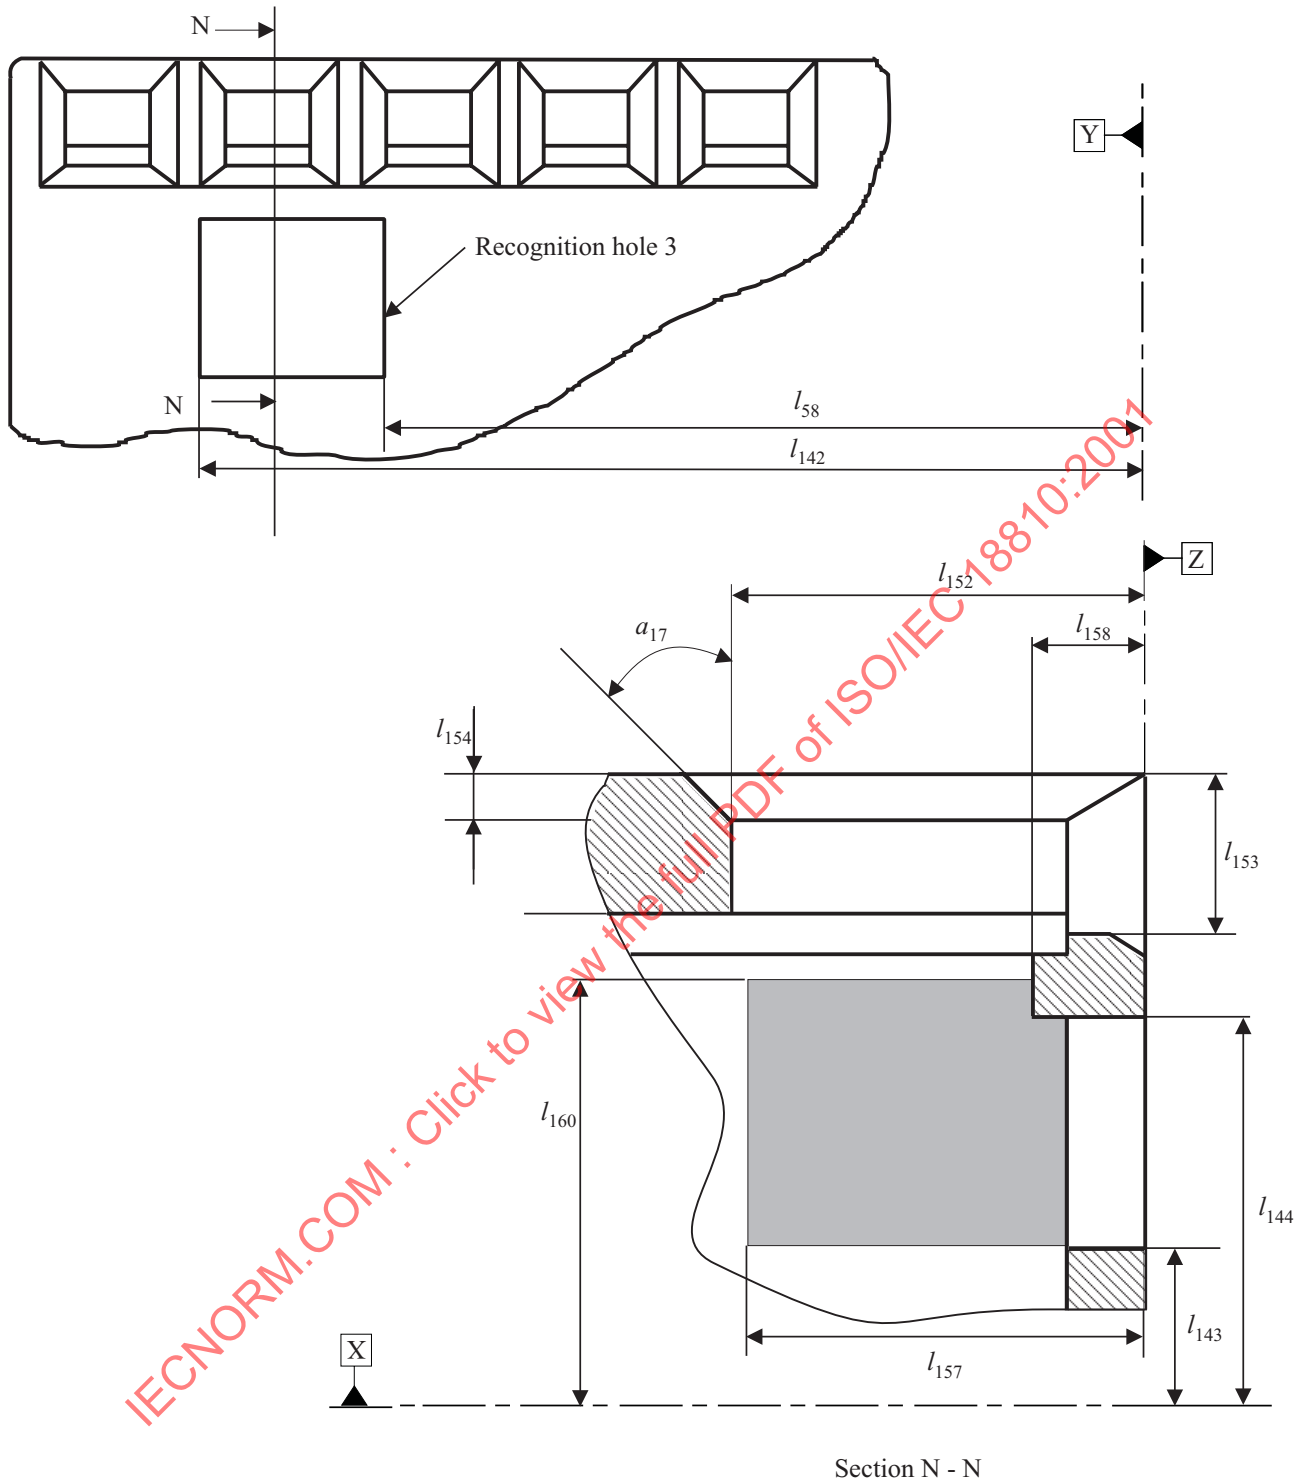

96-0208-B

Figure 26 - MIC access holes, enlarged partial view, bottom side

Section 3 - Requirements for the unrecorded tape

9 Mechanical, physical and dimensional characteristics of the tape

This International Standard specifies two types of cartridge depending on the thickness of the tape.

Type A : The nominal thickness of the tape shall be 7,0 μm .

Type B : The nominal thickness of the tape shall be 5,2 μm .

9.1 Materials

The recordable area of the tape shall consist of a base material coated on one side with a strong yet flexible layer of evaporated metal material or equivalent. The back surface may be coated. The base material shall be

For Type A : An oriented polyethylene terephthalate film or equivalent

For Type B : A polyaramid film or equivalent

There shall be a leader tape between the take-up hub and PBOT. There shall be a trailer tape between PEOT and the supply hub. The leader and trailer tapes shall consist of a translucent length of the same oriented polyethylene terephthalate or an equivalent base material.

The leader and trailer tapes shall each be attached to the magnetic tape by means of a length of splicing tape which extends over each such joint. The splicing tape shall consist of polyethylene terephthalate (or equivalent), coated on one side with an acrylic (or equivalent) adhesive material.

9.2 Tape length

9.2.1 Length of magnetic tape

The length of the tape shall be measured between PBOT and PEOT.

Type A : The length of the tape shall be in the range 5,0 m to 170,0 m.

Type B : The length of the tape shall be in the range 5,0 m to 230,0 m.

9.2.2 Length of leader and trailer tapes

The length of the leader and trailer tapes shall be in the range 70 mm to 90 mm. The joints between the leader and trailer tapes and the magnetic tape shall be perpendicular to the Tape Reference Edge within 1°.

9.2.3 Length of the splicing tapes

The length of the splicing tapes shall be 13 mm max. They shall extend for a distance of 6,5 mm \pm 1,5 mm over the leader and trailer tapes.

9.3 Tape width

9.3.1 Width of magnetic, leader and trailer tapes

The width of the magnetic tape shall be 8,00 mm \pm 0,01 mm. The difference between the largest and smallest width shall not exceed 6 μm peak-to-peak.

The width of the leader tape and of the trailer tape shall be 8,00 mm \pm 0,02 mm.

Procedure

- Cover a section of the tape with a glass microscope slide.
- Measure the width from edge to edge with no tension applied to the tape using a calibrated microscope, profile projector, or equivalent having an accuracy of at least 2,5 μm .
- Repeat the measurement to obtain tape widths at a minimum of five different positions along a minimum tape length of 1,0 m.

The tape width is the average of the widths measured.

9.3.2 Width and position of the splicing tape

The width of the splicing tape and its position across the width of the leader, trailer and magnetic tapes shall be such that the bottom edge of the splicing tape shall be not more than 0,6 mm from the bottom edges of the other tapes, and the top edge of the splicing tape shall be not more than 0,6 mm from their top edges. Neither edge of the splicing tape shall extend beyond the edges of the leader, trailer and magnetic tapes.

9.4 Discontinuities

Between PBOT and PEOT there shall be no discontinuities in the magnetic tape such as those produced by tape splicing or perforations.

9.5 Tape thickness

9.5.1 Thickness of the magnetic tape

The thickness of the magnetic tape at any point shall be :

For Type A : In the range 6,5 μm to 7,3 μm .

For Type B : In the range 5,0 μm to 5,5 μm .

9.5.2 Thickness of the leader and trailer tape

The thickness of the leader and trailer tapes at any point shall be in the range 9 μm to 17 μm .

9.5.3 Thickness of the splicing tape

The thickness of the splicing tape at any point shall be 27 μm max.

9.6 Longitudinal curvature

The radius of curvature of the edge of the tape shall be 33 m min.

Procedure

Allow a 1,0 m length of tape to unroll and assume its natural curvature on a flat smooth surface. Measure the deviation from a 1,0 m chord. The deviation shall not be greater than 3,8 mm. This deviation corresponds to the minimum radius of curvature of 33 m if measured over an arc of a circle.

9.7 Cupping

The departure across the width of tape from a flat surface shall be 0,7 mm max.

Procedure:

- Cut a 150 mm \pm 10 mm length of tape.
- Condition the tape for a minimum of 3 h in the test environment by hanging it so that the coated surface is freely exposed to the test environment.
- Lay the tape across two cylindrical guides that are placed horizontally with the centres 35 mm apart.
- Attach a 0,3 g mass to each end of the tape.
- Measure the distance between the plane established by the edges of the tape and the maximum deviation from the plane.

9.8 Coating adhesion

The force required to peel any part of the coating from the tape base material shall be 0,1 N min.

Procedure

- Take a test piece of the tape approximately 380 mm long and scribe a line through the coating across the width of the tape 125 mm from one end.
- Using a double-sided pressure sensitive tape, attach the test piece to a smooth metal plate, with the coated surface facing the plate, as shown in figure 27.
- Fold the test piece over 180° adjacent to, and parallel with the scribed line. Attach the metal plate and the free end of the test piece to the jaws of a universal testing machine such that when the jaws are separated the tape is peeled. Set the jaw separation rate to 254 mm/min.
- Note the force at which any part of the coating first separates from the base material. If this is less than 0,1 N, the tape has failed the test. If the test piece peels away from the double-sided pressure sensitive tape before the force exceeds 0,1 N, an alternative type of double-sided pressure tape shall be used.

If the back surface of the tape is coated, repeat the procedure for the back coating.

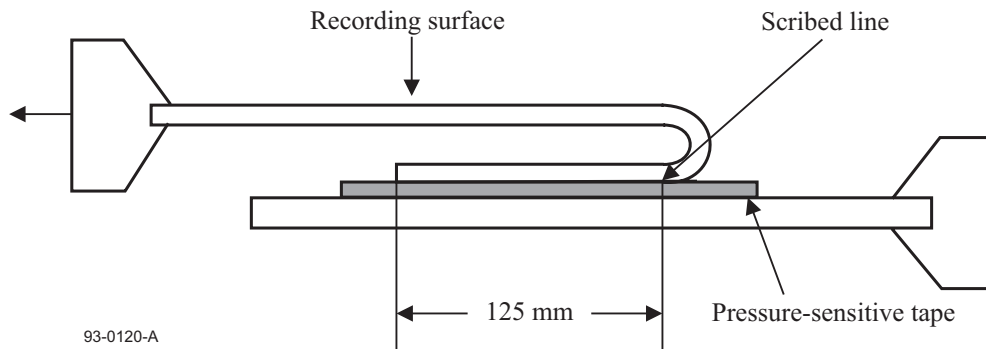


Figure 27 - Measurement of the coating adhesion

9.9 Layer-to-layer adhesion

There shall be no tendency for the test piece to stick or for the coating to peel.

Procedure

- Attach one end of a test piece of magnetic tape of 1 m length to the surface of a glass tube of 36 mm in diameter.
- Wind the tape onto the tube at a tension of 1,1 N.
- Store the wound test piece in a temperature of $45\text{ }^{\circ}\text{C} \pm 3\text{ }^{\circ}\text{C}$ and a relative humidity of 80 % for 4 h.
- Store for a further 24 h in the testing environment.
- Apply a force of 0,1 N to the free end of the test piece and allow it to unwind slowly.

9.10 Tensile strength

Measurements shall be made in accordance with ISO 527-3. The length of the test piece shall be 200 mm. The length of the leader tape test piece shall be 50 mm. The length of the trailer tape test piece shall be 50 mm. The rate of elongation for all tensile tests shall be 100 mm/min.

9.10.1 Breaking strength

The breaking strength of the tape shall be 6 N min.

Procedure

Load the test piece until the breaking point is reached. The force required to reach that point is the breaking strength.

9.10.2 Yield strength

The yield strength is the force required to produce a 5 % elongation of the tape.

The yield strength shall be 3 N min.

9.11 Residual elongation

The residual elongation, expressed as a percentage of the original length, shall be less than 0,04 %.

Procedure

- Measure the initial length of a test piece of approximately 1 m with a maximum applied force of 0,20 N.
- Apply an additional force per total cross-sectional area of $20,5\text{ N/mm}^2$ for a period of 10 minutes.
- Remove the additional force and measure the length after 10 minutes.

9.12 Electrical resistance of the recording surface

The electrical resistance of any square area of the recording surface shall be $10^3\text{ }\Omega$ max.

Procedure


- Condition a test piece of tape in the test environment for 24 h.
- Position the test piece over two 24-carat gold-plated, semicircular electrodes having a radius $r = 10\text{ mm}$ and a finish of at least N4, so that the recording surface is in contact with each electrode. These electrodes shall be placed parallel to the ground and parallel to each other at a distance $d = 8\text{ mm}$ between their centres (see figure 28).
- Apply the force necessary to produce a tension of 5 N/mm^2 to each end of the test piece.

- d) Apply a d.c. voltage of $7\text{ V} \pm 1\text{ V}$ across the electrodes and measure the resulting current flow. From this value, determine the electrical resistance.

Repeat for a total of five positions along the test piece and average the five resistance readings.

When mounting the test piece ensure that no conducting paths exist between the electrodes except that through the coating under test.

Note - Particular attention should be given to keeping the surfaces clean.

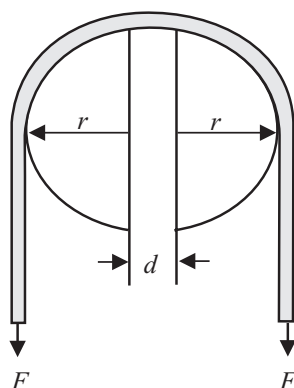

93-0050-B

Figure 28 - Measurement of electrical resistance

9.13 Tape winding

The magnetic surface of the tape shall face outward from the cartridge and reels.

9.14 Light transmittance of the tape

The light transmittance of the magnetic tape shall be 5 % max.

The light transmittance of the leader and trailer tapes shall be 60 % min.

The method for measuring light transmittance is given in annex A.

9.15 Recognition stripe

A single recognition stripe shall be printed on the back side of the leader across the full width of the tape as shown in figure 29. The length of the stripe shall be

$$l_{180} = 3,0\text{ mm} \pm 0,1\text{ mm}$$

The position of the edge of the stripe closest to the splice shall be at a distance

$$l_{181} = 20,7\text{ mm} \pm 10,8\text{ mm}$$

from the splice of the leader and magnetic tape.

The light transmittance of the stripe shall be 10 % max. when measured according to annex A.

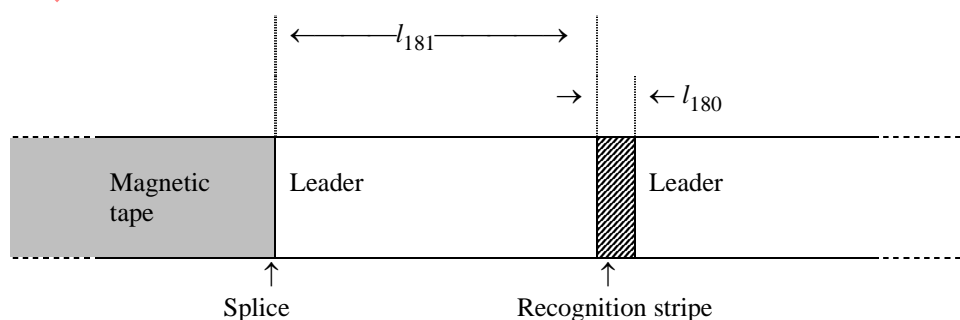


Figure 29 - Location of the recognition stripe

10 Magnetic recording characteristics

The magnetic recording characteristics shall be defined by the testing requirements given below.

When performing these tests, the output or resultant signal shall be measured on a read-while-write pass for both a tape calibrated to the Master Standard Reference Tape and the tape under test, on the same equipment.

The following conditions shall apply to the testing of all magnetic recording characteristics, unless otherwise stated.

tape condition	: a.c. erased to a level of less than 0,1 % of the Average Signal Amplitude at 4 107,1 ftpmm.
diameter of the scanner	: 40,00 mm + 0,01 mm - 0,00 mm
rotation speed of the scanner	: 6 400 rpm \pm 0,5 rpm
tape speed	: 27,51 mm/s \pm 0,30 mm/s
test tracks	: Positive azimuth
read gap length	: 0,18 μ m \pm 0,05 μ m
recording current	: Test Recording Current
recorded track width	: 11 μ m \pm 1 μ m
tape tension	: 0,050 N \pm 0,005 N measured at the input of the scanner
write gap length	: 0,18 μ m \pm 0,05 μ m
read head track width	: 13 μ m to 15 μ m
read head setting during a	: the read head shall cover the whole width of the recorded track read pass
read output level	: taken at the appropriate fundamental frequency

10.1 Typical Field

The Typical Field shall be between 80 % and 112 % of the Recording Field.

Traceability to the Reference Field is provided by the calibration factor supplied with each Secondary Standard Reference Tape.

10.2 Signal Amplitude

The Average Signal Amplitude at the physical recording density of 4 107,1 ftpmm shall be between 90 % and 140 % of that for the Master Standard Reference Tape.

The Average Signal Amplitude at the physical recording density of 2 053,6 ftpmm shall be between 90 % and 130 % of that for the Master Standard Reference Tape.

Traceability to the Average Signal Amplitude of the Master Standard Reference Tape is provided by the calibration factors supplied with each Secondary Standard Reference Tape.

10.3 Resolution

The ratio of the Average Signal Amplitude at the physical recording density of 4 107,1 ftpmm to that at the physical recording density of 2 053,6 ftpmm shall be between 85 % and 120 % of the same ratio for the Master Standard Reference Tape.

Traceability to the resolution for the Master Standard Reference Tape is provided by the calibration factors supplied with each Secondary Standard Reference Tape.

10.4 Overwrite

Overlap is the ratio of the Average Signal amplitude of the residual of a low density recording after overwriting at a higher density to the Average Signal Amplitude of the original low density recording.

Traceability to the overlap ratio for the Master Standard Reference Tape is provided by the calibration factors supplied with each Secondary Standard Reference Tape.

Procedure

a.c. erase the tape. Record at the physical density of 821,4 ftpmm and measure the Average Signal Amplitude. Overwrite at the physical recording density of 8 214,2 ftpmm and measure the Average Signal Amplitude of the residual 821,4 ftpmm signal. Repeat for the Secondary Standard Reference Tape.

Requirement

$$\text{The ratio} = \frac{\text{Residual Average Signal Amplitude at 821,4 ftpmm after overwriting}}{\text{Average Signal Amplitude of the original recording at 821,4 ftpmm}}$$

shall be less than 120 % of the same ratio for the Master Standard Reference Tape.

10.5 Ease of erasure

When a tape has been recorded at 821,4 ftpmm with the Test Recording Current and then passed through a longitudinal steady erasing field of 320 000 A/m, any remaining signal shall not exceed 2 % of the Standard Reference Amplitude for that density. The erasing field shall be reasonably uniform, for example, the field in the middle of a solenoid. This measurement shall be made with a band pass filter passing at least the first three harmonics.

10.6 Tape quality

10.6.1 Missing pulses

A missing pulse is a loss of read signal amplitude. A missing pulse exists when the base-to-peak read signal is 40 %, or less, of half the Average Signal Amplitude for the recording density of 2 053,6 ftpmm on the same tape.

10.6.2 Missing pulse zone

A missing pulse zone commences with a missing pulse and ends when a length of 1 mm of track has been measured. If a missing pulse zone continues for a distance exceeding 1 mm, a new missing pulse zone commences.

A missing pulse zone does not continue from one track to the next.

The missing pulse zone rate shall be less than 1 in 5×10^6 flux transitions and applies to both positive and negative azimuth tracks.

10.7 Signal-to-Noise Ratio (SNR) characteristic

The Signal-to-Noise Ratio is the average rms read signal amplitude divided by the average integrated rms noise amplitude, and expressed in decibels.

$$\text{SNR} = 20 \log \frac{\text{Average rms signal amplitude}}{\text{Average integrated rms noise amplitude}} \text{ dB}$$

Requirement

The SNR for the tape under test (SNR_{tape}) shall be better than -2 dB relative to the SNR for the Master Standard Reference Tape (SNR_{MSRT}) when measured according to the procedure defined in annex B.

Traceability to the SNR_{MSRT} is provided by the calibration factor supplied with each Secondary Standard Reference Tape.

Section 4 - Requirements for an interchanged tape

11 Format

11.1 General

The smallest collection of data supported by the format is a record. A record is the smallest distinct set of data bytes supplied, e.g. from a host, for processing and recording by a tape drive system, and the smallest distinct set of data to be read from tape, reprocessed and made available, e.g. to a host, by a tape drive system. Two types of record are supported, namely Processed Records and Unprocessed Records.

A recorded tape shall contain Unprocessed Records or Processed Records or both. It may also contain Separator Marks. Both Processed Records and Unprocessed Records are stored on tape as Entities. Separator Marks may be used by the host to indicate the logical separation(s) of the data within a structuring scheme.

Entities and Separator Marks are collected into groups. An index within each group describes that group's contents. A series of transformations, namely randomizing, interleaving, blocking, the generation and inclusion of two Reed-Solomon error correcting codes, and the translation of bytes to Channel bits, is applied to each group prior to recording. A third Reed-Solomon error correcting code may be applied to the group; in this case, the resulting bytes are transformed and recorded in the frames that follow the group on the tape.

Each group is recorded on a group of tracks. The part of each track in which the user data, Separator Marks and associated information are recorded is called the Main Data Zone of the track. Additional information about the contents of the group, the location of the track(s) and the contents of the track(s) is recorded in the Headers of the Recorded Data Blocks in the ID Area of the Main Data Zone.

In the following description all operations on the data received from the host computer, including the use of error detecting and correcting codes, but excluding processing, are described. Then the method of recording on the tape and the tape layout itself will be described. However, because of the inherent characteristics of this format, where required, advance references to the tape layout will also be made in the course of the description of the operations on the data.

11.2 Basic Groups

The data to be recorded shall be grouped in Basic Groups of 1 202 688 bytes. Each Basic Group shall be identified by a running number allocated consecutively starting with 0. In each Basic Group the bytes are identified by a running number from 1 to 1 202 688.

The structure of Basic Group No. 0 is not specified by this International Standard. The data for this group is generated by the tape system. It is recorded as the Vendor Group, (see annex K).

Data and Separator Marks received from the host computer shall be grouped in Basic Groups, following Basic Group No. 0, starting with Basic Group No. 1. These Basic Groups shall be structured as follows.

Note - In this International Standard, there are two types of Separator Marks which are referred to as Separator 1 and Separator 2. Some other standards, e.g. those which define an interface between a tape drive and a host computer, use the terms "file mark" and "set mark" to denote Separator Marks. It is recommended that Separator 1 be equated to file mark and Separator 2 be equated to set mark.

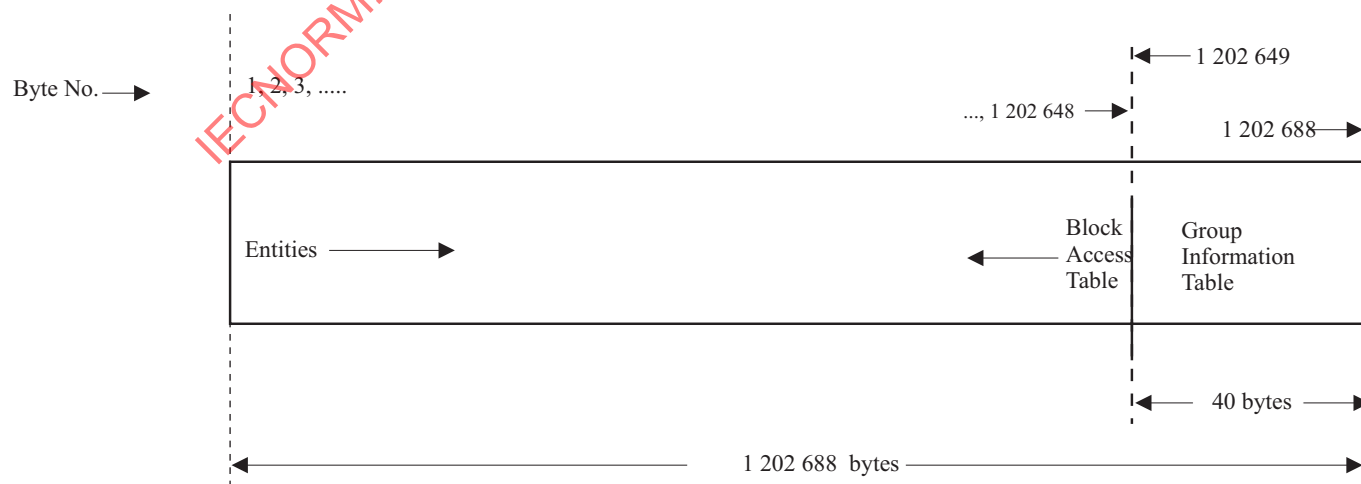


Figure 30 - Structure of a Basic Group

Data constituting Entities shall progress into the Basic Group from left to right (as seen in figure 30). At the same time a part of the Basic Group, called the Block Access Table (BAT), shall progress from right to left. The Group Information Table (GIT) shall occupy the last 40 bytes of the Basic Group.

11.2.1 Entity

11.2.1.1 Content

An Entity comprises an Entity Header and a sequence of consecutive Records. The Entity Header shall be 8 bytes in length. It shall precede the Record Sequence.

All Processed Records in an Entity shall be the result of applying the same processing algorithm to Unprocessed Records of equal length. All Unprocessed Records in an Entity shall be of equal length.

An Entity may span Basic Groups, provided that all of the Entity Header and the first 8 bits of the first or single Record of the Entity are within the same Basic Group.

In the case where an Entity spans Basic Groups, the parts thereof, within each Basic Group, are identified as Start Part of Entity, Middle Part of Entity and Last Part of Entity (See 11.2.3.2, to 11.2.3.4).

An Entity shall not contain a Record that does not contain data for interchange.

11.2.1.2 Entity Header

Byte No. 1 is the first byte in the Entity Header, and Byte No. 8 is the last byte in the Entity Header, i.e. is adjacent to the first or single Record of the Entity. The Entity Header shall have the following layout:

Byte No. 1 This byte shall be set to 0000 1000, specifying the number of bytes of the Entity Header, viz. 8.

Byte No. 2 This byte shall be set as follows:

- if the record is an Unprocessed Record, this byte shall be set to the value 1;
- if the record is a Processed Record, this byte shall be set to
 - the value in the range 2 to 254 corresponding to the registered identifier according to ISO/IEC 11576 of the processing algorithm applied to the record,
 - the value 255, if the processing algorithm is not registered.

This byte shall not be set to the value 0.

Bytes No. 3 to 5 shall specify in binary notation the length in bytes of the Record before processing, if any (see 11.2.1.1, 2nd paragraph). This length shall not equal 0. Byte No. 3 shall be the MSB, Byte No. 5 shall be the LSB.

Bytes No. 6 to 8 shall specify in binary notation the number of Records in the Entity. This number shall not equal 0. Byte No. 6 shall be the MSB, Byte No. 8 the LSB.

11.2.2 Group Information Table

The Group Information Table shall be a 40-byte field, and shall have the layout shown in table 1.

Table 1 - Group Information Table

Byte Positions	Length in bytes	Name of the field
1 202 649	1	Set to all ZEROs
1 202 650 to 1 202 652	3	Basic Group Number
1 202 653 to 1 202 656	4	Record Count
1 202 657 to 1 202 660	4	Separator 1 Count
1 202 661 to 1 202 664	4	Separator 2 Count
1 202 665	1	Set to all ZEROs
1 202 666 to 1 202 668	3	Basic Group Number of the Previous Record
1 202 669	1	Set to all ZEROs
1 202 670 to 1 202 672	3	Basic Group Number of the Previous Separator 1
1 202 673	1	Set to all ZEROs
1 202 674 to 1 202 676	3	Basic Group Number of the Previous Separator 2
1 202 677 1 202 678	2	Block Access Table Count Least significant two bytes
1 202 679 1 202 680	2	Count of Records in the Current Basic Group. Least significant two bytes
1 202 681 1 202 682	2	Count of Separators 1 in the Current Basic Group. Least significant two bytes
1 202 683 1 202 684	2	Count of Separators 2 in the Current Basic Group. Least significant two bytes
1 202 685	1	MSB of the Block Access Table Count
1 202 686	1	MSB of the Count of Records in the current Basic Group
1 202 687	1	MSB of the Count of Separators 1 in the current Basic Group
1 202 688	1	MSB of the Count of Separators 2 in the current Basic Group

Within each field of table 1 the most-significant byte shall be in the lowest-numbered byte position and the least-significant byte shall be in the highest-numbered byte position. However, the last four 1-byte entries contain the most-significant byte of the last four 2-byte entries, respectively.

11.2.2.1 Group Number field

This field shall be a 3-byte field. It shall specify in binary notation the running number of the current Basic Group.

11.2.2.2 Record Count field

This field shall be a 4-byte field. It shall specify in binary notation the sum of the values in the Count of Records field in the current Basic Group fields of the GITs of all Basic Groups since LBOT, up to and including the current Basic Group. Separator Marks shall be counted as records.

11.2.2.3 Separator 1 Count field

This field shall be a 4-byte field. It shall specify in binary notation the number of Separators 1 written since the LBOT including those in the current Basic Group.

11.2.2.4 Separator 2 Count field

This field shall be a 4-byte field. It shall specify in binary notation the number of Separators 2 written since the LBOT including those in the current Basic Group.

11.2.2.5 Group Number of the Previous Record field

This field shall be a 3-byte field. It shall specify in binary notation the running number of the highest-numbered previous Basic Group in which a Separator Mark or the beginning of an Unprocessed Record occurred. If no such Basic Group exists, this field shall be set to all ZEROs.

11.2.2.6 Group Number of the Previous Separator 1 field

This field shall be a 3-byte field. It shall specify in binary notation the running number of the previous highest-numbered Basic Group which contains the last written Separator 1. If no such Basic Group exists, this field shall be set to all ZEROs.

11.2.2.7 Group Number of the Previous Separator 2 field

This field shall be a 3-byte field. It shall specify in binary notation the running number of the previous highest-numbered Basic Group which contains the last written Separator 2. If no such Basic Group exists, this field shall be set to all ZEROs.

11.2.2.8 Block Access Table Count field

This field shall be a 3-byte field. It shall specify in binary notation the number of entries in the Block Access Table. This is not the same as the number of Records or Parts of Records in the Basic Group.

11.2.2.9 Count of Records in the Current Basic Group field

This field shall be a 3-byte field. It shall specify in binary notation the sum of the following:

- the number of Separator Mark entries in the BAT of the current Basic Group
- the number of Records in the Entities of the current Basic Group
- the sum of the numbers in Bytes No. 6 to No. 8 of the Entity Headers of all Entities for which there is an Entire Entity entry (See 11.2.3.1) in the BAT of the current Basic Group,
- the value which is 1 less than the number in Bytes No. 6 to No. 8 of the Entity Header of the Entity for which there is a Start Part of Entity entry (See 11.2.3.2) in the BAT of the current Basic Group, if such an entry exists,
- the number of Total Count of Entity entries in the BAT of the current Basic Group.

11.2.2.10 Count of Separators 1 field

This field shall be a 3-byte field. It shall specify in binary notation the number of Separators 1 written in the current Basic Group.

11.2.2.11 Count of Separators 2 field

This field shall be a 3-byte field. It shall specify in binary notation the number of Separators 2 written in the current Basic Group.

11.2.3 Block Access Table (BAT)

The BAT shall contain one or more entries for each Entity and each Separator Mark of the Basic Group. Entities not entirely contained in the Basic Group shall also be identified by one or more entries. The first entry shall be written immediately before the Group Information Table, in byte positions 1 202 645 to 1 202 648. Each entry shall be a 4-byte field, structured as shown in figure 31. The 1st byte shall be in the lowest-numbered byte position and the 4th byte shall be in the highest-numbered byte position.

Entry of the Block Access Table			
Flag Byte	Count		
1st byte	2nd byte (MSB)	3rd byte	4th byte (LSB)

Figure 31 - Block Access Table

Depending on the setting of the Flag Byte, the 3-byte Count field shall express in binary notation a number not greater than $2^{24}-1$ as specified below. This International Standard specifies the 14 settings of the Flag Byte listed in table 2. Other settings are prohibited by this International Standard.

The most significant bit of the Flag Byte (see table 2), the After Early Warning Point bit, is indicated as indifferent as far as the meaning of the entry is concerned. It shall be set as follows:

- before EWP it shall be set to ZERO;
- after EWP it shall be set to ONE in the current entry and all following BAT entries of the current Basic Group and in all BAT entries of all following Basic Groups.

Table 2 - Settings of the Flag Byte

	Setting	Entry
Before EWP	0000 0001	Entire Entity
	0000 0010	Start Part of Entity
	0000 0011	Middle Part of Entity
	0000 0100	Last Part of Entity
	0000 0101	Total Count of Entity
	0000 0110	Separator Mark Entity
	0000 0111	Skip
After EWP	1000 0001	Entire Entity
	1000 0010	Start Part of Entity
	1000 0011	Middle Part of Entity
	1000 0100	Last Part of Entity
	1000 0101	Total Count of Entity
	1000 0110	Separator Mark Entity
	1000 0111	Skip

11.2.3.1 Entire Entity

This entry relates to an Entity and shall specify that the Entity starts and ends in the current Basic Group. The Count field shall specify the number of bytes in the Entity.

11.2.3.2 Start Part of Entity

This entry relates to an Entity and shall specify that the Entity starts in the current Basic Group and ends in a subsequent Basic Group. The Count field shall specify the number of bytes in the Start Part of Entity recorded in the current Basic Group.

11.2.3.3 Middle Part of Entity

This entry relates to an Entity and shall specify that the Entity starts in a previous Basic Group and ends in a subsequent Basic Group. The Count field shall specify the number of bytes in the partial Entity which is in the current Basic Group.

11.2.3.4 Last Part of Entity

This entry relates to an Entity and shall specify that the Entity starts in a previous Basic Group and ends in the current Basic Group. The Count field shall specify the number of bytes in the partial Entity which is in the current Basic Group. This entry shall be immediately followed in the BAT of the current Basic Group by an entry for Total Count of Entity.

11.2.3.5 Total Count of Entity

Total Count of Entity shall follow the Last Part of Entity entry. This entry relates to the same Entity as that of the immediately preceding entry for Last Part of Entity. The Count field shall specify the total number of bytes in the entire Entity.

11.2.3.6 Separator Mark Entity

This entry shall specify that the Entity is a Separator Mark record. The Count field shall specify the number 0 if the Entity is a Separator 1 record and the number 1 if the Entity is a Separator 2 record.

11.2.3.7 Skip

There shall be a Skip entry as the last entry of the Block Access Table of each Basic Group. This entry indicates that the last byte of user data in the current Basic Group has been reached. The Count field shall specify the remaining number of bytes in the Basic Group. Thus the minimum number that can be specified by the Count field shall be the total number of bytes of the Group Information Table and of the Block Access Table.

The Count Value in the Block Access Table for Skip entries shall be a multiple of 4.

11.2.3.8 Count fields


The sum of the numbers specified in the Count fields of those of the types of entry in the following list which are present in the Block Access Table shall be 1 202 688. The list comprises: Skip, Entire Entity, Start Part of Entity, Middle Part of Entity and Last Part of Entity.

11.2.3.9 Valid sequences of entries of the Block Access Table

The valid sequences of entries are specified by table 3, in which states and actions are described within rectangles, and the entries (as designated by the setting of the Flag Byte) are described within ellipses.

Table 3 shows only those entries which are valid as the next entry to be encountered in each state or after each action. All other entries are invalid.

Table 3 - Valid sequences of entries in the Block Access Table

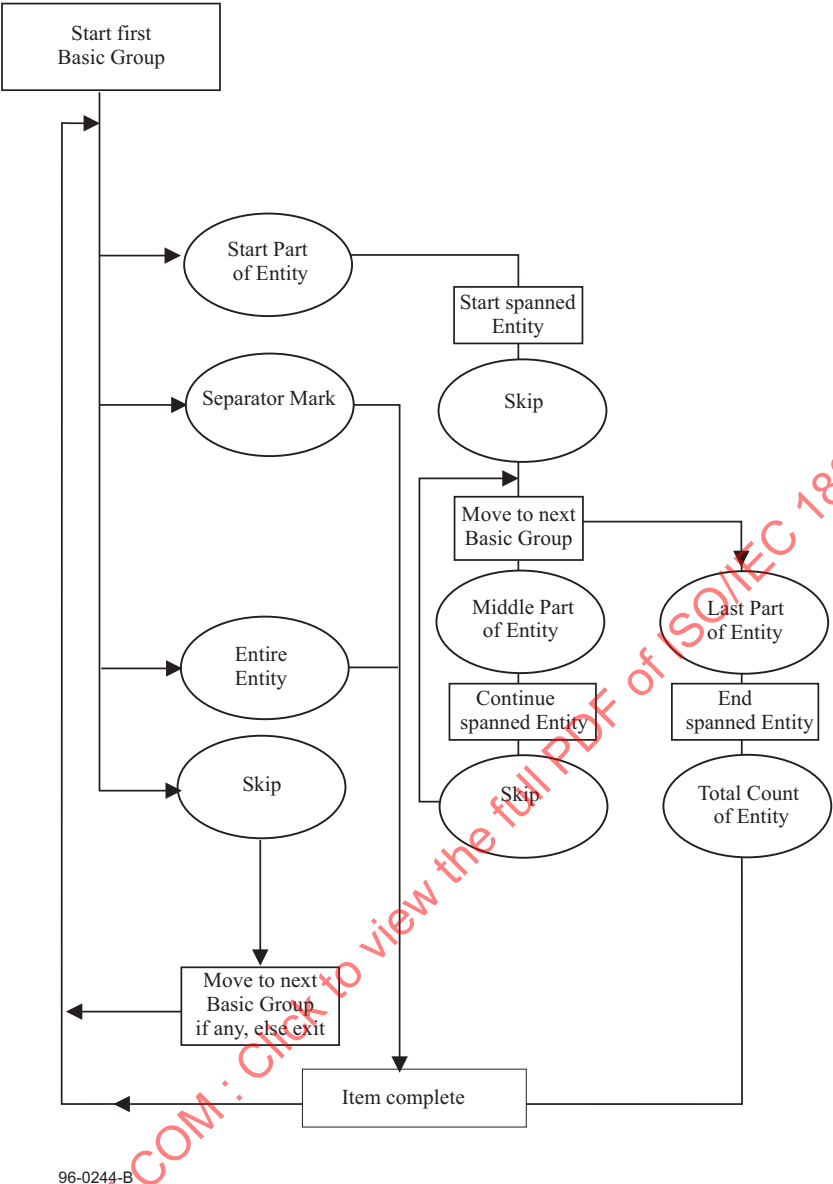

11.3 Sub-Groups

11.3.1 G1 Sub-Group

When a Basic Group has been completed, it shall be split into 18 G1 Sub-Groups, numbered 1 to 18, of 66 816 bytes numbered from 1 to 66 816, starting with the first 66 816 bytes in the first G1 Sub-Group, followed by the next 66 816 bytes in the second G1 Sub-Set, and so on.

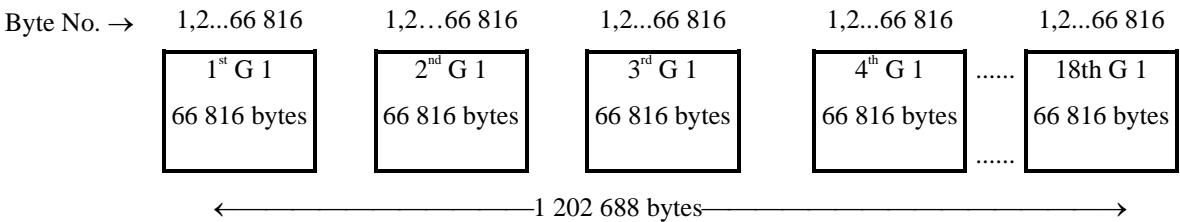


Figure 32 - G1 Sub-Groups

11.3.2 G2 Sub-Group - Randomizing

The odd numbered bytes of each G1 Sub-Group shall be submitted to an Exclusive OR operation together with a sequence of bits which is the output of the shift register shown in figure 33. The even numbered bytes of each G1 Sub-Group shall be submitted to an Exclusive OR operation together with a sequence of bits which is the output of the shift register shown in figure 33.

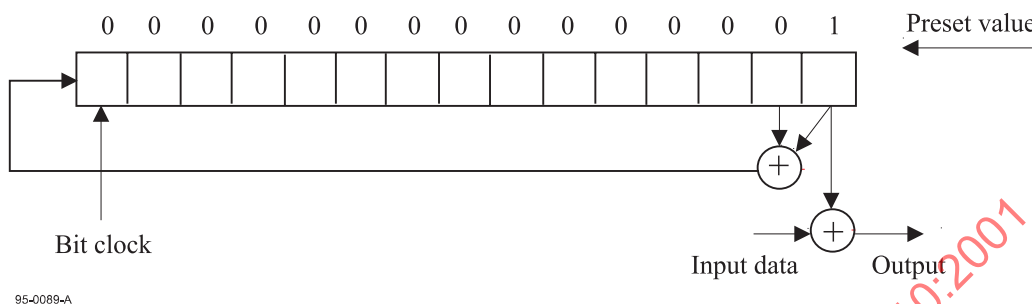


Figure 33 - Shift register

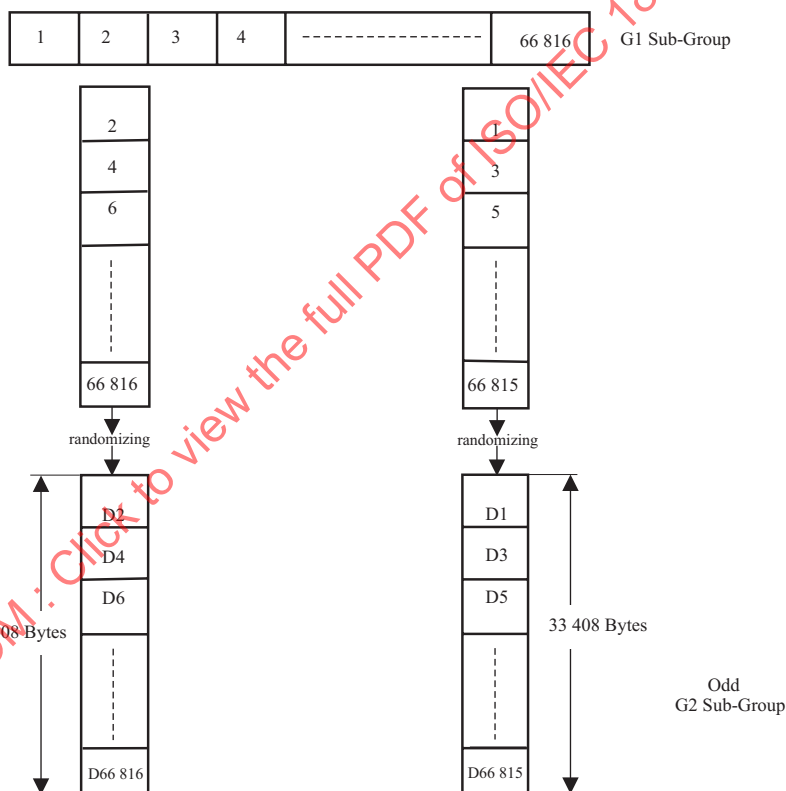


Figure 34 - G2 Sub-Groups

For each byte the least significant bit, i.e. bit b1 shall be input first. The logical operators are Exclusive ORs.

The G1 Sub-Group is thereby transformed into two G2 Sub-Groups: the Even G2 Sub-Group and the Odd G2 Sub-Group, each comprising 33 408 bytes.

For $n = 1, 2, \dots, 33\,408$, the bytes D_n of the G1 Sub-Group shall be allocated and numbered as follows:

- the Even G2 Sub-Group comprises bytes D_{2n}
- the Odd G2 Sub-Group comprises bytes $D_{(2n-1)}$

In each G2 Sub-Group, the sequence of the bytes is the same as in the G1 Sub-Group.

11.3.3 G3 Sub-Group

A G3 Sub-Group shall consist of an array of 336 Blocks numbered from 1 to 336. The 33 408 bytes of each G2 sub-Group shall be placed in the 288 Blocks from No.25 to No.312, so that each Block contains 116 data bytes. Each such Block is completed with 12 bytes of C1 ECC are computed according to annex G over the 116 Data Bytes of the Block.

Once the 288 Blocks are filled as indicated and the corresponding C1 ECC bytes have been generated, C2 ECC bytes are computed over these 288 Blocks and the C1 ECC bytes corresponding to each Block. The resulting 6 144 C2 ECC bytes are entered in Blocks No.1 to No.24 and No.313 to No.336. The C2 ECC bytes shall be computed as specified in annex G.

This operation shall be performed for the Even G2 Sub-Group and for the Odd G2 Sub-Group, so that each generates a G3 Sub-Group.

Each Block of a G3 Sub-Group contains 128 bytes. These Blocks shall be numbered consecutively by Block Numbers in the range 1 to 336.

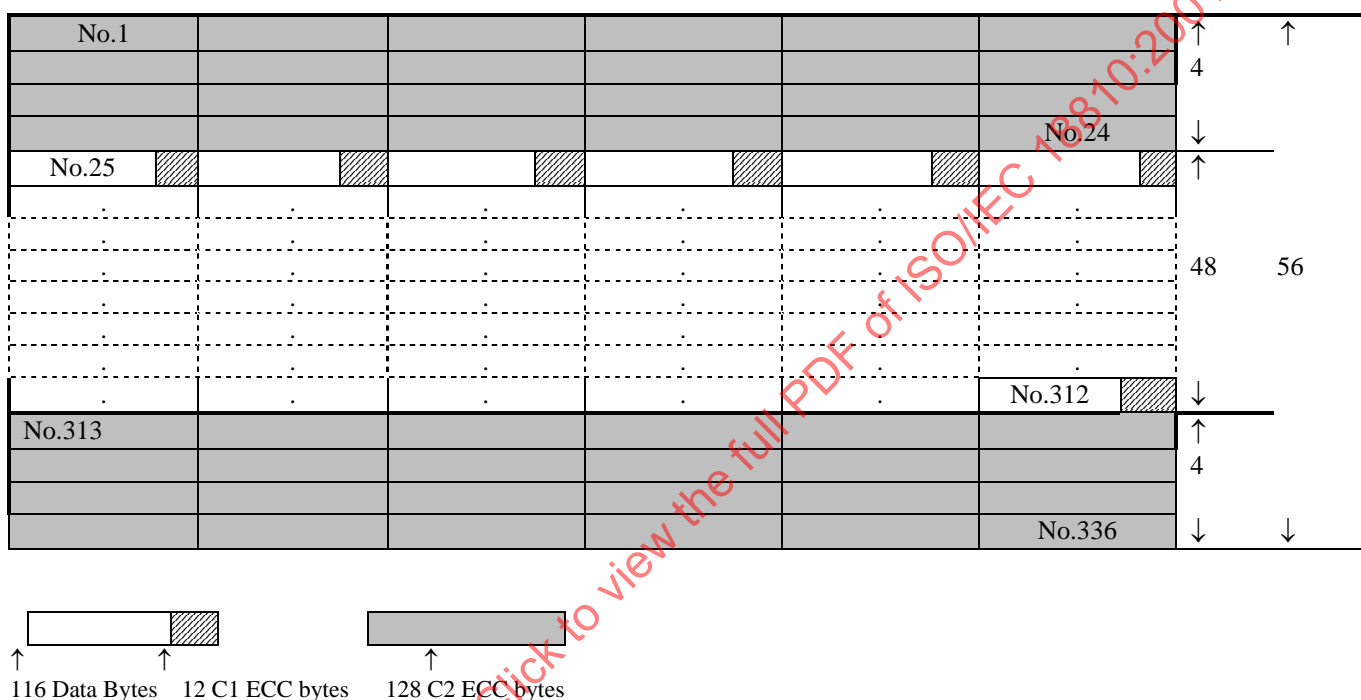


Figure 35 - G3 Sub - Group

11.4 Data Block

Each 128-byte Block shall be transformed into a 136-byte Data Block by the addition of a Header of 8 bytes preceding the 128 bytes of the block. The structure of the Header shall be as shown in figure 36.

	b8	b7	b6	b5	b4	b3	b2	b1
ID 1	Data Block Number (DBN)							
ID 2	DBN	ID Information						
ID 3	ID Information							
ID 4	ID Information							
ID 5	ID Information							
ID 6	ID Information							
ID 7	ID Parity							
ID 8	ID Parity							

Figure 36 - Structure of the Data Block Header

These ID bytes shall contain the following ID Information.

- Data Block Number
- Tape Length and Thickness ID
- Logical Frame ID
- Partition ID
- Area ID
- Repeat
- Position
- Group Count
- Separator 1 Count
- Separator 2 Count
- Record Count
- Absolute Frame Number
- ID Parity

This ID Information shall be recorded as specified in 11.4.2

11.4.1 ID information

11.4.1.1 Data Block Number (DBN)

This number is a 9-bit number. It is represented by the 8 bits of byte ID1 and by bit b8 of byte ID2 as the msb of this number. The value of this number shall be in the range 0 to 335.

11.4.1.2 Tape Length and Thickness ID

This 8-bit field shall be set as follows.

- Bits 8 and 7 shall be set to:
- 00 to indicate a tape thickness of 6,5 μm to 7,3 μm
 - 01 to indicate a tape thickness of 5,0 μm to 5,5 μm

Bits 6 to 1 shall express in binary notation an integer n in the range 1 to 46, such that $5n$ indicates the length of the tape in metres.

11.4.1.3 Logical Frame ID (LFID)

This 8-bit field shall be as follows.

- Bit 8 This bit shall be set to ONE, if the Frame is the last of the Basic Group, else it shall be set to ZERO.
- Bit 7 This bit shall be set to ONE if the Frame is an ECC 3 Frame (See 16.5.3), else it shall be set to ZERO.
- Bits 6 to 1 These bits shall be set to all ZEROS, if the Frame is an Amble Frame, else they shall express in binary notation the ordinal number n of the Data Frame, for $n=1$ to 20.

11.4.1.4 Partition ID

This 8-bit field shall specify in binary notation the ordinal number of the partition in the range 0 to 255.

11.4.1.5 Area ID

This 4-bit field shall specify the current area on the tape and thereby indicate the type of the current Frame. Other settings than those specified in figure 37 are prohibited by this International Standard.

Bit Positions				Definition
7	6	5	4	
0	0	0	0	Device Area
0	0	0	1	Reference Area
0	0	1	0	System Area
0	1	0	0	Data Area
0	1	0	1	EOD Area
0	1	1	1	Optional Device Area

Figure 37 - Area ID

11.4.1.6 Repeat

This 3-bit field shall specify the number of instances of a Basic Group.

- 000 shall indicate that there is only one instance of the Basic Group.
- 001 shall indicate that there are 2 instances of the Basic Group.
- 010 shall indicate that there are 3 instances of the Basic Group.
- 011 shall indicate that there are 4 instances of the Basic Group.
- 100 shall indicate that there are 5 instances of the Basic Group.
- 101 shall indicate that there are 6 instances of the Basic Group.
- 110 shall indicate that there are 7 instances of the Basic Group.
- 111 shall indicate that there are 8 instances of the Basic Group.

11.4.1.7 Position

This 3-bit field shall specify the ordinal position of the current recorded instance of this Basic Group in a sequence of contiguous recorded instances of this Basic Group, see figure 38.

Bit Positions			Definition
3	2	1	
0	0	0	The first instance of the Basic Group.
0	0	1	The 2nd instance of the Basic Group.
0	1	0	The 3rd instance of the Basic Group.
0	1	1	The 4th instance of the Basic Group.
1	0	0	The 5th instance of the Basic Group.
1	0	1	The 6th instance of the Basic Group.
1	1	0	The 7th instance of the Basic Group.
1	1	1	The 8th instance of the Basic Group.

Figure 38 - Position field

11.4.1.8 Group Count

This 24-bit field shall specify the number of Basic Groups that have been written following the Vendor Group of the current partition, starting with 1 and including the current Basic Group. The Vendor Group shall have a Basic Group count of 0. When Repeat is used, the Group Count shall remain constant for each instance of a Basic Group.

11.4.1.9 Separator 1 Count

This 32-bit field shall specify the number of Separators 1 written since the beginning of the partition up to and including the current Basic Group. The first Separator 1 in the partition shall have a count of 1.

11.4.1.10 Separator 2 Count

This 32-bit field shall specify the number of Separators 2 that have been written since the beginning of the partition, up to and including the current Basic Group. The first Separator 2 in the partition shall have a count of 1.

11.4.1.11 Record Count

This 32-bit field shall specify the number of Records written since the beginning of the partition, including any complete Records in the current Basic Group. This number shall specify the Record Count (See 11.2.2) recorded in the Group Information Table.

11.4.1.12 Absolute Frame Number (AFN)

This 24-bit field shall specify the Absolute Frame Number of the current Frame. The first Frame of the Reference Area shall have AFN 1. Any discontinuous or repeated numbers shall only occur in an Amble Frame sequence (see 17.1), except in Intermediate Frames (see 16.5.5).

11.4.1.13 ID Parity

The ID Parity bytes shall be computed using an extended Reed-Solomon Code.

Calculation in a GF (2⁸) shall be defined by:

$$G(x) = x^8 + x^4 + x^3 + x^2 + 1$$

A primitive element α in GF (2⁸) is 00000010

The ID parity bytes shall satisfy:

$$H_s \times V_s = 0$$

$$H_s = \begin{bmatrix} 1 & 1 & 1 & 1 & 1 & 1 & 1 & 0 \\ \alpha^5 & \alpha^4 & \alpha^3 & \alpha^2 & \alpha^1 & 1 & 0 & 1 \end{bmatrix}$$

$$V_s = \begin{bmatrix} \text{ID1} \\ \text{ID2} \\ \text{ID3} \\ \text{ID4} \\ \text{ID5} \\ \text{ID6} \\ \text{ID7} \\ \text{ID8} \end{bmatrix}$$

11.4.2 Recording of the ID Information in the Data Block Headers

The 336 Data Blocks of a G3 Sub-Group shall be arranged into 21 sequences of 16 Data Blocks. The ID Information is laid out within these 16 Data Blocks as specified in figure 39 for Data Blocks 1 to 16. The same layout is repeated in each sequence of 16 Data Blocks.

Data Block 1	ID 1		Data Block Number
	ID 2	bit 8	Data Block Number (msb)
		bit 7 to bit 4	Area ID
		bit 3 to bit 1	Set to ZEROs
	ID 3		Set to ZEROs
	ID 4		Set to ZEROs
	ID 5		Set to ZEROs
	ID 6		Tape Length and Thickness ID
	ID 7		ID Parity
	ID 8		ID Parity
	DATA		128 bytes of Data
Data Block 2	ID 1		Data Block Number
	ID 2	bit 8	Data Block Number (msb)
		bit 7 to bit 4	Area ID
		bit 3 to bit 1	Set to ZEROs
	ID 3		Separator 1 Count (LSB)
	ID 4		Separator 1 Count
	ID 5		Separator 1 Count
	ID 6		Separator 1 Count (MSB)
	ID 7		ID Parity
	ID 8		ID Parity
	DATA		128 bytes of Data
Data Block 3	ID 1		Data Block Number
	ID 2	bit 8	Data Block Number (msb)
		bit 7 to bit 4	Area ID
		bit 3 to bit 1	Set to ZEROs
	ID 3		Separator 2 Count (LSB)
	ID 4		Separator 2 Count
	ID 5		Separator 2 Count
	ID 6		Separator 2 Count (MSB)
	ID 7		ID Parity
	ID 8		ID Parity
	DATA		128 bytes of Data

Figure 39 - Allocation of ID Information (continued)

Data Block 4	ID 1		Data Block Number
	ID 2	bit 8	Data Block Number (msb)
		bit 7 to bit 4	Area ID
		bit 3 to bit 1	Set to ZEROs
	ID 3		Record Count (LSB)
	ID 4		Record Count
	ID 5		Record Count
	ID 6		Record Count (MSB)
	ID 7		ID Parity
	ID 8		ID Parity
	DATA		128 bytes of Data
Data Block 5	ID 1		Data Block Number
	ID 2	bit 8	Data Block Number (msb)
		bit 7 to bit 4	Area ID
		bit 3 to bit 1	Set to ZEROs
	ID 3		Partition ID
	ID 4		Group Count (LSB)
	ID 5		Group Count
	ID 6		Group Count (MSB)
	ID 7		ID Parity
	ID 8		ID Parity
	DATA		128 bytes of Data
Data Block 6	ID 1		Data Block Number
	ID 2	bit 8	Data Block Number (msb)
		bit 7 to bit 4	Area ID
		bit 3 to bit 1	Repeats
	ID 3		LFID
	ID 4		AFN (LSB)
	ID 5		AFN
	ID 6		AFN (MSB)
	ID 7		ID Parity
	ID 8		ID Parity
	DATA		128 bytes of Data

Figure 39 - Allocation of ID Information (continued)

Data Block 7	ID 1		Data Block Number
	ID 2	bit 8	Data Block Number (msb)
		bit 7 to bit 4	Area ID
		bit 3 to bit 1	Position
	ID 3		LFID
	ID 4		AFN (LSB)
	ID 5		AFN
	ID 6		AFN (MSB)
	ID 7		ID Parity
	ID 8		ID Parity
	DATA		128 bytes of Data
Data Block 8	ID 1		Data Block Number
	ID 2	bit 8	Data Block Number (msb)
		bit 7 to bit 4	Area ID
		bit 3	Set to ZERO
		bit 2	Set to ZERO
		bit 1	If set to ZERO, ID 3 and ID 4 shall be set to all ZEROs. If set to ONE, ID 3 and ID 4 shall be set as specified below in this Data Block 8.
	ID 3		If bit 1 of ID 2 in this Data Block 8 is set to ONE, this field shall be set to the byte resulting from the Exclusive OR operation performed over the 33 408 bytes of the Even G2 Sub-Group of the Basic Group. If said Bit 1 is set to ZERO, this field shall be set to all ZEROs.
	ID 4		If bit 1 of ID 2 in this Data Block 8 is set to ONE, this field shall be set to the byte resulting from the Exclusive OR operation performed over the 33 408 bytes of the Odd G2 Sub-Group of the Basic Group. If said Bit 1 is set to ZERO, this field shall be set to all ZEROs.
	ID 5		Set to ZERO
	ID 6		Set to ZERO
	ID 7		ID Parity
	ID 8		ID Parity
	DATA		128 bytes of Data

Figure 39 - Allocation of ID Information (continued)

Data Block 9	ID 1		Data Block Number
	ID 2	bit 8	Data Block Number (msb)
		bit 7 to bit 4	Area ID
		bit 3 to bit 1	Set to ZEROs
	ID 3		Set to ZEROs
	ID 4		Set to ZEROs
	ID 5		Set to ZEROs
	ID 6		Set to ZEROs
	ID 7		ID Parity
	ID 8		ID Parity
	DATA		128 bytes of Data
Data Block 10	ID 1		Data Block Number
	ID 2	bit 8	Data Block Number (msb)
		bit 7 to bit 4	Area ID
		bit 3 to bit 1	Set to ZEROs
	ID 3		Set to ZEROs
	ID 4		Set to ZEROs
	ID 5		Set to ZEROs
	ID 6		Set to ZEROs
	ID 7		ID Parity
	ID 8		ID Parity
	DATA		128 bytes of Data
Data Block 11	ID 1		Data Block Number
	ID 2	bit 8	Data Block Number (msb)
		bit 7 to bit 4	Area ID
		bit 3 to bit 1	Set to ZEROs
	ID 3		Set to ZEROs
	ID 4		Set to ZEROs
	ID 5		Set to ZEROs
	ID 6		Set to ZEROs
	ID 7		ID Parity
	ID 8		ID Parity
	DATA		128 bytes of Data

Figure 39 - Allocation of ID Information (continued)

Data Block 12	ID 1		Data Block Number
	ID 2	bit 8	Data Block Number (msb)
		bit 7 to bit 4	Area ID
		bit 3 to bit 1	Set to ZEROs
	ID 3		Set to ZEROs
	ID 4		Set to ZEROs
	ID 5		Set to ZEROs
	ID 6		Set to ZEROs
	ID 7		ID Parity
	ID 8		ID Parity
	DATA		128 bytes of Data
Data Block 13	ID 1		Data Block Number
	ID 2	bit 8	Data Block Number (msb)
		bit 7 to bit 4	Area ID
		bit 3 to bit 1	Set to ZEROs
	ID 3		Set to ZEROs
	ID 4		Set to ZEROs
	ID 5		Set to ZEROs
	ID 6		Set to ZEROs
	ID 7		ID Parity
	ID 8		ID Parity
	DATA		128 bytes of Data
Data Block 14	ID 1		Data Block Number
	ID 2	bit 8	Data Block Number (msb)
		bit 7 to bit 4	Area ID
		bit 3 to bit 1	Set to ZEROs
	ID 3		Set to ZEROs
	ID 4		Set to ZEROs
	ID 5		Set to ZEROs
	ID 6		Set to ZEROs
	ID 7		ID Parity
	ID 8		ID Parity
	DATA		128 bytes of Data

Figure 39 - Allocation of ID Information (continued)


Data Block 15	ID 1		Data Block Number
	ID 2	bit 8	Data Block Number (msb)
		bit 7 to bit 4	Area ID
		bit 3 to bit 1	Set to ZEROs
	ID 3		Set to ZEROs
	ID 4		Set to ZEROs
	ID 5		Set to ZEROs
	ID 6		Set to ZEROs
	ID 7		ID Parity
	ID 8		ID Parity
DATA		128 bytes of Data	
Data Block 16	ID 1		Data Block Number
	ID 2	bit 8	Data Block Number (msb)
		bit 7 to bit 4	Area ID
		bit 3 to bit 1	Set to ZEROs
	ID 3		Set to ZEROs
	ID 4		Set to ZEROs
	ID 5		Set to ZEROs
	ID 6		Set to ZEROs
	ID 7		ID Parity
	ID 8		ID Parity
DATA		128 bytes of Data	

Figure 39 - Allocation of ID Information (concluded)

12 Method of recording

The method of recording shall be

- a ONE is represented by a positive residual magnetism,
- a ZERO is represented by a negative residual magnetism.

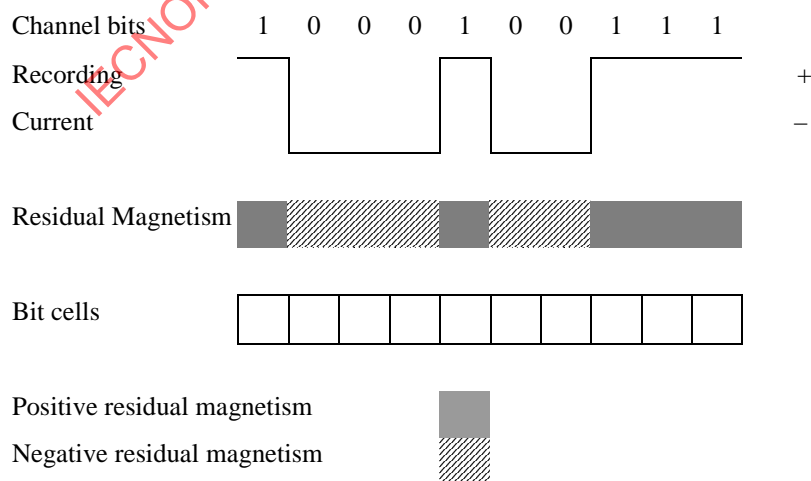

12.1 Physical recording density

The nominal maximum physical recording density is 8 214,2 ftpmm. The resulting nominal bit cell length is 0,121 7 μm . These values are derived from the track length (see 13.7) divided by the number of bits per track.

12.2 Long-term average bit cell length

The long-term average bit cell length for each track shall be measured over 64 Recorded Data Blocks. It shall be within 0,2 % of the nominal bit cell length.

12.3 Short-term average bit cell length

The short-term average bit cell length, referred to a particular bit cell, shall be the average of the preceding 40 bit cells. It shall be within 0,35 % of the long-term average bit cell length for the preceding track of the same azimuth.

12.4 Rate of change

The above defined short-term average bit cell length shall not change at a rate greater than 0,05 % per bit cell.

12.5 Bit shift

When measured according to annex E $(|A_{1110}| + |A_{0111}|)/(A_{0100} + A_{0010})$ shall be less than 0,05.

12.6 Read signal amplitude

The Average Signal Amplitude of an interchanged cartridge shall be at

— 821,4 ftpmm, 912,7 ftpmm, 1 026,8 ftpmm, 1 173,5 ftpmm, 1 369,0 ftpmm, 1 642,9 ftpmm, 2 053,6 ftpmm, 2 738,1 ftpmm, 4 107,1 ftpmm and 5 476,2 ftpmm: between 80 % and 140 % of the respective nominal recorded levels (see C.1).


12.7 Maximum recorded levels

Recorded signals shall be erasable by overwriting. The Maximum Allowable Recorded Levels specified in C.2 of annex C shall not be exceeded.

13 Track geometry

13.1 Track configuration

The helical track pattern is formed by the relationship between the direction of tape motion and the axis of rotation of a pair of heads, one of which has a positive azimuth angle and the other a negative azimuth angle. The direction of recording is away from the Tape Reference Edge. The track configuration is shown in figure 40.

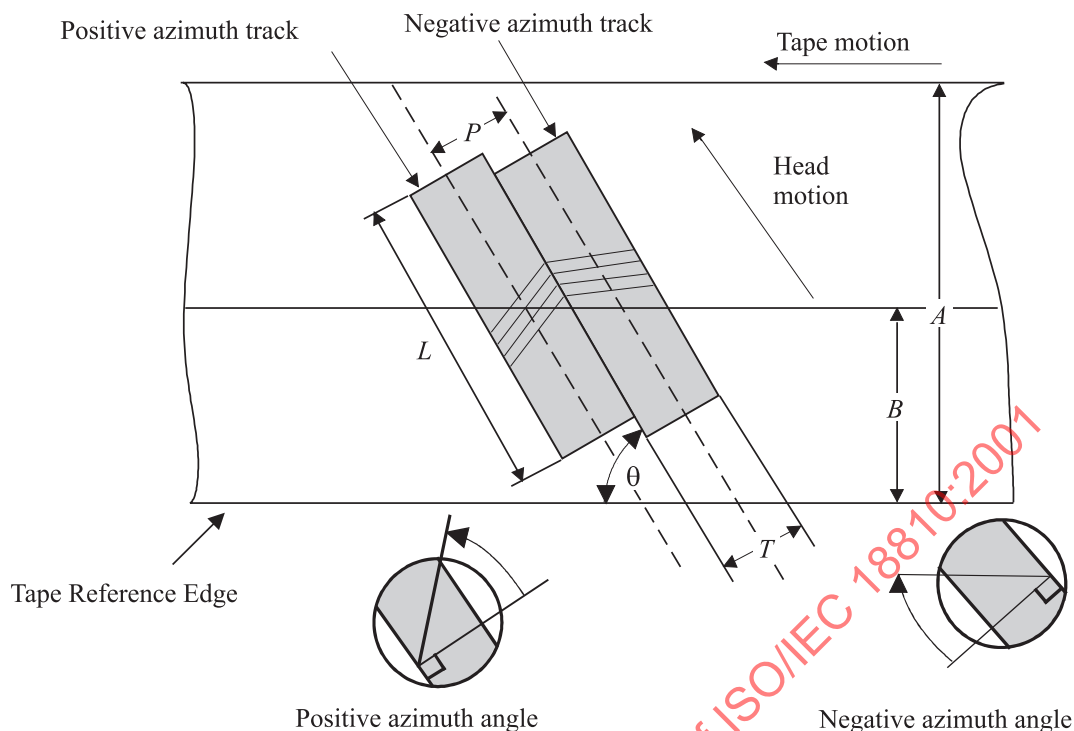

96-0176-A

A : Tape width
 B : Ideal tape centreline
 θ : Track angle

L : Track length
 P : Track pitch
 T : Track width

Figure 40 - Track configuration (view on the recording surface)

13.2 Average track pitch

The average track pitch, taken over any group of 30 consecutive tracks, shall be $11,00 \mu\text{m} \pm 0,20 \mu\text{m}$. The track pitch at a non-seamless append point (see 16.5.6.2) shall not be included in this average.

13.3 Variations of the track pitch

The change of track pitch between successive track pitches shall not exceed 2,0 %, excluding the effect of an appending operation (see 16.5.6).

13.4 Track width

The nominal track width is $11,00 \mu\text{m}$.

The measured track width shall be $11,00 \mu\text{m} \pm 1,50 \mu\text{m}$.

This requirement shall not apply at a non-seamless append point.

13.5 Track angle

The nominal angle of each track with respect to the Tape Reference Edge shall be $4,895^\circ$.

13.6 Track edge straightness

The leading edge of each track shall be straight when measured according to annex F.

13.7 Track length

The length of each track shall be $60,334 \text{ mm} \pm 0,050 \text{ mm}$.

13.8 Azimuth angles

The positive azimuth angle shall be $25^\circ 0' 0'' \pm 0^\circ 15' 0''$

The negative azimuth angle shall be $-25^\circ 0' 0'' \pm 0^\circ 15' 0''$.

14 Recorded patterns

Each Data Block consists of 136 8-bit bytes, viz. 128 data bytes and 8 Data Block Header bytes. These 8-bit bytes are grouped pair-wise into 68 16-bit bytes which are represented by 20-Channel bit patterns according to annex D.

14.1 Recorded Data Block

A recorded Data Block shall consist of 1 400 Channel bits representing the 68 16-bit bytes of a Main Data Block, each preceded by a 40-Channel bit Sync field having one of the following patterns

- a) 1000100111 1111111000 0000000111 1111111000; $Q = 3$
- b) 1011011000 0000000111 1111111000 0000000111; $Q = 0$
- c) 0100100111 1111111000 0000000111 1111111000; $Q = 3$
- d) 0111011000 0000000111 1111111000 0000000111; $Q = 0$

Pattern a) shall be used for $Q' = 0$

Pattern b) shall be used for $Q' = 1$

Pattern c) shall be used for $Q' = 2$

Pattern d) shall be used for $Q' = 3$

(See annex D)

14.2 Margin blocks

These blocks shall have a length of 1 400 Channel bits consisting of one of the repeated 20-Channel bit patterns

- A) 00110011001100110011 for $Q' = 0$ or 1
- B) 11001100110011001100 for $Q' = 2$ or 3

15 Format of a track

15.1 Track structure

Each track shall consist of two Margin Zones, three ATF Zones and two Main Data Zones which are shown in tables 4 and 5. ATF Zones consist of Spacer Blocks and ATF Blocks which are different between a positive azimuth track and a negative azimuth track.

Table 4 : Format of a negative azimuth track

Zone	Contents	Number of Blocks
Margin Zone 1	Margin Blocks	3
ATF Zone 1	Spacer Blocks	1
	ATF C Blocks	1,5
	Spacer Blocks	1,5
Main Data Zone 1	Recorded Data Blocks 1 to 168	168
ATF Zone 2	Spacer Blocks	1
	ATF C Blocks	1,5
	Spacer Blocks	1,5
Main Data Zone 2	Recorded Data Blocks 169 to 336	168
ATF Zone 3	Spacer Blocks	1
	ATF C Blocks	1,5
	Spacer Blocks	1,5
Margin Zone 2	Margin Blocks	3

Table 5 : Format of a track (Positive azimuth track)

Zone	Contents	Number of Blocks
Margin Zone 1	Margin Blocks	3
ATF Zone 1	Spacer Blocks	0,25
	ATF A Blocks	1,5
	ATF B Blocks	1,5
	Spacer Blocks	0,75
Main Data Zone 1	Recorded Data Blocks 1 to 168	168
ATF Zone 2	Spacer Blocks	0,25
	ATF A Blocks	1,5
	ATF B Blocks	1,5
	Spacer Blocks	0,75
Main Data Zone 2	Recorded Data Blocks 169 to 336	168
ATF Zone 3	Spacer Blocks	0,25
	ATF A Blocks	1,5
	ATF B Blocks	1,5
	Spacer Blocks	0,75
Margin Zone 2	Margin Blocks	3

There are 354 Blocks in each track.

15.2 Positioning accuracy

The top of the 178th Block of a track shall be at a distance of $4,460 \text{ mm} \pm 0,021 \text{ mm}$ from the Tape Reference Edge. The top of the 178th Block on the centre line of the track is the midpoint between the first bit of the 176th Block and the last bit of the

180th block. In addition the tops of the 178th Blocks of any pair of adjacent tracks shall not differ by more than 5,4 μm . This is equivalent to 0,5 Block along the track at the centre of the track.

15.3 Tracking scheme

Tracking shall be achieved by the Automatic Track Finding (ATF) method. ATF blocks shall be allocated to three zones of a track: ATF Zone 1, ATF Zone 2 and ATF Zone 3 as shown in tables 4 and 5.


Each ATF Zone shall comprise Spacer Blocks and ATF Blocks.

Spacer Blocks shall have a length of 1 400 Channel bits consisting of the same repeated Channel bit patterns specified for Margin Blocks (See 14.2). Spacer Blocks shall be recorded with a positive azimuth on positive azimuth tracks, and with a negative azimuth on negative azimuth tracks.

ATF Blocks shall be recorded with a positive azimuth. ATF Blocks shall have a length of 1 400 Channel bits consisting of the repeated 20-Channel bit patterns

- a) 00000111110000011111 used for $Q' = 0$ or 1
 b) 11111000001111100000 used for $Q' = 2$ or 3

ATF Blocks are designated as ATF-A, ATF-B and ATF-C for the purpose of illustrating the phase relationships among tracks in figure 41. ATF-B Blocks on track n , ATF-C blocks on track $n-1$ and ATF-A Blocks on track $n-2$ shall be recorded in phase.

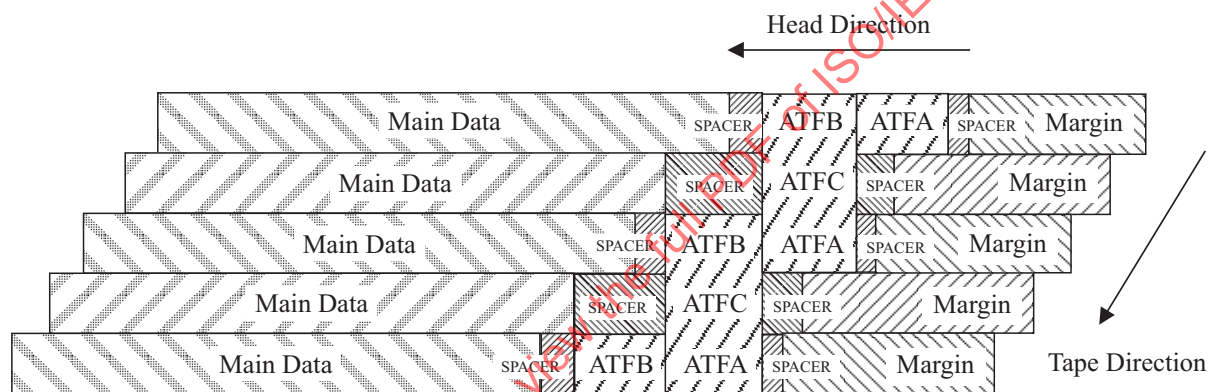

99-0069-A

Figure 41 - Allocation of ATF and Spacer Blocks

16 Layout of the tape

The layout of the tape shall consist of a Device Area followed by up to 256 partitions. Each partition shall consist of

- the Reference Area
- the System Area
- the Data Area
- the EOD Area
- the Optional Device Area

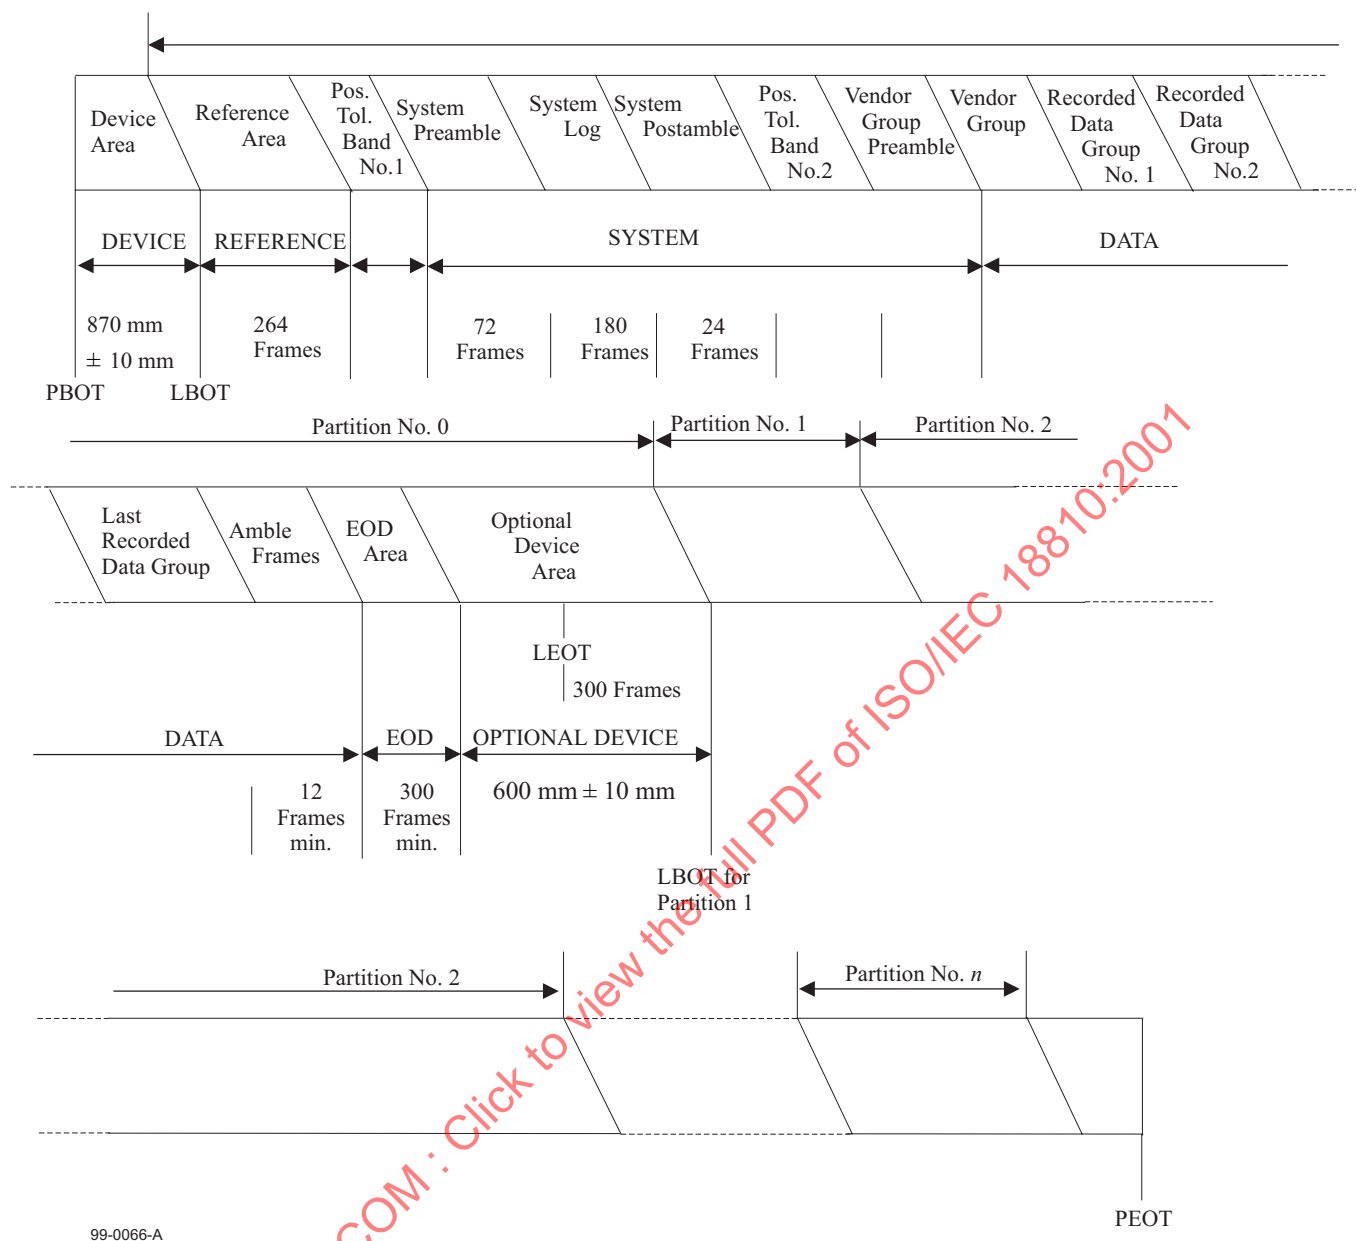


Figure 42 - Layout of the tape

16.1 Device Area

This area shall be the first area on the magnetic tape and shall extend from PBOT to LBOT. It shall not be used for writing data for interchange. Its length, measured parallel to the Tape Reference Edge, from PBOT to the first bit of the first block of the first recorded track of the Reference Area, shall be 870 mm \pm 10 mm. It shall consist of three zones: a spin-up zone, a test zone and a guard zone.

The first zone of the Device Area is a spin-up zone. It is the part of the tape which is wrapped around the drum when the tape is loaded into the drive.

The spin-up zone shall be followed by a test zone available for read/write purposes. The contents of these two zones are not specified by this International Standard.

The test zone shall be followed by a guard zone of length 6,2 mm min. in which no recording is permitted.

16.2 Reference Area

This area shall consist of the Frames with AFN 1 to AFN 264, of which the first starts at LBOT and has AFN 1. The Reference Area is used as the physical reference when updating the System Log. The content of these Frames is not specified by this International Standard and shall be ignored in interchange.

16.3 Position Tolerance Band No. 1

This band shall have a nominal length equivalent to 24 Frames, from AFN 265 to AFN 288. It is used to accommodate the positioning tolerances when updating the System Log. Discontinuities and repetitions of the AFNs may occur in this band. The recorded signals may be ill-defined in this band. The content of these Frames is not specified by this International Standard and shall be ignored in interchange.

16.4 System Area

This area shall consist of the System Preamble, System Log, System Postamble, Position Tolerance Band No. 2, and the Vendor Group Preamble.

16.4.1 System Preamble

The System Preamble shall consist of 72 System Ambler Frames with AFN 289 to AFN 360. Their content is not specified by this International Standard and shall be ignored in interchange.

16.4.2 System Log

The System Log shall be recorded in the MIC, it may be recorded also on the tape, see 16.4.2.2.2 and clause 18.

If the System Log is recorded also on the tape, there shall be 180 instances with AFN 361 to AFN 540 of the Frame shown in figure 43 recorded on the tape. In each partition 48 bytes shall be allocated to the Partition Information of the partition. The Partition Information of each partition shall be recorded in the System Log of Partition 0. Figure 43 shows the System Log with Vendor Data information.

If the System Log is recorded in the MIC only, the content of these 180 Frames is not specified by this International Standard and shall be ignored in Interchange. Clause 18 specifies how the System Log is recorded in the MIC.

1 to 48	Partition 0 Information	48 Bytes	12 288 Bytes	66 816 Bytes
49 to 96	Partition 1 Information	48 Bytes		
.	.	.		
.	.	.		
12 240 to 12 288	Partition 255 Information	48 Bytes	72 Bytes	54 454 Bytes
12 289 to 12 359	Volume Information			
12 360 and 12 361	System Log Vendor Data Type Number			
12 362 to 66 816	System Log Vendor Data			

Figure 43 - System Log with Vendor Data information

If the tape contains only one partition, the 12 240 bytes intended for the Partition 1 Information to Partition 255 Information shall be set to all ZEROS. If the tape contains more than one partition, then the Partition Information for the partition following the last partition defined shall be set to ZEROS.

16.4.2.1 Partition Information

The Partition Information shall comprise the fields specified in figure 44.

Previous Groups Written			4 Bytes
Total Groups Written			4 Bytes
Set to all ZEROs			1 Byte
Previous Groups Read			3 Bytes
Total Groups Read			4 Bytes
Set to all ZEROs			1 Byte
Total Rewritten Frames			3 Bytes
Set to all ZEROs			1 Byte
Total 3rd ECC Count			3 Bytes
Access Count			4 Bytes
Update Replace Count			4 Bytes
Previous Rewritten Frames			2 Bytes
Previous 3rd ECC Count			2 Bytes
Set to all ZEROs			1 Byte
Load Count			3 Bytes
Set to all ZEROs			1 Byte
Last Valid Absolute Frame Number			3 Bytes
Flag Byte	Bit 1	Prevent Write	1 Byte
	Bit 2	Prevent Read	
	Bit 3	Prevent Write Retry	
	Bit 4	Prevent Read Retry	
	Bit 5	Set to ZERO	
	Bit 6	Set to ZERO	
	Bit 7	Set to ZERO	
	Bit 8	Partition is Opened	
Maximum Absolute Frame Number			3 Bytes

Figure 44 - Partition Information

Where the field of a Partition Information contain numerical values, these are recorded in binary notation in these fields.

16.4.2.1.1 Previous Groups Written

This field shall specify the number of Basic Groups physically written to the partition since the last update of the System Area.

16.4.2.1.2 Total Groups Written

This field shall specify the total number of Basic Groups physically written to the partition since the first time the partition was written.

16.4.2.1.3 Previous Groups Read

This field shall specify the number of Basic Groups physically read from the partition since the last update of the System Area.

16.4.2.1.4 Total Groups Read

This field shall specify the total number of Basic Groups physically read from the tape partition since the first time the partition was written. This number shall not include any read operation which is part of a Read-After-Write check. The number accumulates over the life of the tape unless a format pass is performed, in which case this field is re-set to the value 0.

16.4.2.1.5 Total Rewritten Frames

This field shall be the total number of Frames of the partition that have been rewritten since the partition was first written. It shall be incremented by 1 each time a Frame is repeated following error detection by the Read-After-Write process. This count shall not include any Frames which are written between the original Frame and its rewrite. The number accumulates over the life of the tape unless a format pass is performed, in which case this field is re-set to the value 0.

16.4.2.1.6 Total 3rd ECC Count

This field shall specify the number of Basic Groups which have been physically read and data has not been recovered without requiring the use of C3 correction since the first time the partition was written. The number accumulates over the life of the tape unless a format pass is performed, in which case this field is re-set to the value 0.

16.4.2.1.7 Access Count

If used, this field shall specify the number of accesses to the partition. This field shall be set to all ZEROs if not used.

16.4.2.1.8 Update Replace Count

If used, this field shall specify the number of write operations to the partition. This field shall be set to all ZEROs if not used.

16.4.2.1.9 Previous Rewritten Frames

This field shall specify the number of Frames of the partition that have been rewritten since the last update of the System area. It shall be incremented by 1 each time a Frame is repeated following error detection by the Read-After-Write process. This count shall not include any Frames which are written between the original Frame and its rewrite.

16.4.2.1.10 Previous 3rd ECC Count

This field shall specify the number of Basic Groups which have been physically read and data has not been recovered without requiring the use of C3 correction since the last update of the System area.

16.4.2.1.11 Load Count

This field shall specify the number of times the tape has been loaded since the first time the tape was written. One load shall consist of threading the tape around the drum of the drive mechanism, positioning the tape ready for use and later unthreading the tape. The number accumulates over the life of the tape unless a format pass is performed, in which case this field is re-set to the value 0. This field shall be Reserved in the System Log of Partition 0 of a partitioned tape.

16.4.2.1.12 Last Valid Absolute Frame Number

This field shall specify the AFN of the last Frame containing valid data. The first Frame of the Reference Area shall have AFN 1.

16.4.2.1.13 Flag Byte

Bit 1 Prevent Write

If set to ZERO, write operation for the partition is enabled

If set to ONE, write operation for the partition is inhibited

Bit 2 Prevent Read

If set to ZERO, read operation for the partition is enabled

If set to ONE, read operation for the partition is inhibited

Bit 3 Prevent Write Retry

If set to ZERO, write-retry operation for the partition is enabled

If set to ONE, write-retry operation for the partition is inhibited

Bit 4 Prevent Read Retry

If set to ZERO, read-retry operation for the partition is enabled

If set to ONE, read-retry operation for the partition is inhibited

Bits 5 to 7 shall be set to ZERO.

Bit 8 Partition is Opened

shall be set to ZERO, when all operations in the partition have been performed

Shall be set to ONE before a read and/or a write operation within the partition

16.4.2.1.14 Maximum Absolute Frame Number

This field shall specify the AFN of the last Frame of the last EOD Area.

16.4.2.1.15 Reserved Field

Reserved Fields shall be set to all ZEROs.

16.4.2.2 Volume Information

This 72-byte field shall contain the information about the volume.

Reserved	5 Bytes	Set to all ZERO	
Length and Thickness Numbers	1 Byte	Bit 1 to Bit 6	Tape Length Number
		Bit 7 and Bit 8	Tape Thickness Number
Flags	1 Byte	Bit 1	AIT Native Flag
		Bit 2	Load/Unload at PBOT
		Bit 3	System Log Location
		Bit 4	
		Bit 5	Presence of MIC
		Bit 6	Set to ZERO
		Bit 7	Set to ZERO
		Bit 8	Set to ZERO
Last Partition Number	1 Byte	Last Partition Number of the cartridge	
Device Area Map	32 Bytes	256 bits of Device Area Allocation Map	
Reserved	32 Bytes	Set to all ZEROS	

Figure 45 - Volume Information

16.4.2.2.1 Length and Thickness Numbers

Bit 6 to bit 1 shall be set to the same value as that recorded by Bit 6 to Bit 1 of the Tape Length and Thickness ID byte (See 11.4.1.2).

Bit 8 and bit 7 when set to

00	Indicate Type A
01	Indicate Type B

Other settings of these bits are prohibited by this International Standard.

16.4.2.2.2 Flags

Bit 1	If set ZERO, the number of partitions shall be 2 If set to ONE, the maximum number of partitions is limited by the size of the MIC
Bit 2	If set to ZERO and there is an Optional Device Area, load/unload shall be done at the Optional Device Area. If set to ONE, load/unload shall be done at the PBOT
Bit 3 and bit 4	These bits shall indicate the location of the System Log. If set to 10, the System Log is recorded both on the tape and in the MIC If set to 11, the System Log is recorded in the MIC only
Bit 5	shall be set to ONE to indicate the presence of MIC
Bit 6 to bit 8	shall be set to all ZEROS

Other settings of these bits are prohibited by this International Standard.

16.4.2.2.3 Last Partition Number

This is the last valid partition number on the tape.

16.4.2.2.4 Device Area Map

This is a bit allocation map of the Optional Device Area. There are 256 bits in the 32 bytes. A bit is assigned to each partition. If this bit is set to ONE then the partition contains an Optional Device Area.

16.4.2.3 System Log Vendor Data Type Number

This number shall be represented by two bytes.

When set to the value 0, the System Log Vendor Data shall be all ZEROS.

When set to the value 1, the System Log Vendor Data shall contain vendor-unique information.

Other values of this number are prohibited by this International Standard.

16.4.3 System Postamble

The System Postamble shall consist of 24 System Ambler Frames AFN 541 to AFN 564. Their content is not specified by this International Standard and shall be ignored in interchange.

Note - It is recommended that the continuum comprising the System Preamble, the System Log, the Vendor Data information and the System Postamble be written in a continuous motion when the System Log is updated.

16.4.4 Position Tolerance Band No. 2

This band shall have a nominal length equivalent to 24 Frames. The content of these Frames is not specified by this International Standard and shall be ignored in interchange.

16.4.5 Vendor Group Preamble

The Vendor Group Preamble shall consist of 72 Frames with AFN 589 to AFN 660. The Vendor Group Preamble shall immediately precede the Vendor Group and be contiguous with it. The content of these Frames is not specified by this International Standard and shall be ignored in interchange.

16.5 Data Area

This area shall consist of the Vendor Group and one or more Recorded Data Groups.

16.5.1 Vendor Group

A Vendor Group is the recorded instance of Basic Group No. 0, the content of which is not specified by this International Standard. The Vendor Group is formed from the bytes of that Basic Group by applying the operations described in clause 11 and recording the resulting Frames. The first of these Frames shall have AFN 661.

In addition none or either or both of two further operations, namely ECC3 and Repeated Frames may be applied.

No unrecorded space or physical discontinuity or seam or AFN discontinuity or repetition may occur within a Vendor Group.

16.5.2 Recorded Data Group

Each Recorded Data Group is a recorded instance of a Basic Group, and is formed from the data sent from a host computer by applying the operations described in clause 11 and recording the resulting Frames in the sequence of their Logical Frame Numbers.

In addition, none or either or both of two further operations may be applied. These are ECC3 and Repeated Frames. No unrecorded space or physical discontinuity or seam or, AFN discontinuity or repetition may occur within a Recorded Data Group.

16.5.3 ECC3

The Error Correction Code 3 has the capability of correcting any two tracks which are bad in a Recorded Data Group. The ECC3 data is derived from the 18 G1 Sub-Groups of the Basic Group to form a 19th and a 20th G1 Sub-Group. It uses the following Reed-Solomon code:

$$GF(2^8) (20, 18, 3)$$

The calculation on $GF(2^8)$ shall be defined by the following polynomial:

$$G(x) = x^8 + x^4 + x^3 + x^2 + 1 \quad \alpha = (00000010)$$

The interleave depth of ECC3 shall be one frame, the ECC bytes shall satisfy

$$H_R \times V_R = 0$$

The generator polynomial shall be

$$G_R(x) = \prod_{i=0}^{j-1} (x - \alpha^i)$$

$$\begin{bmatrix} 1 & 1 & 1 & 1 & \dots & 1 & 1 & 1 \\ \alpha^{19} & \alpha^{18} & \alpha^{17} & \alpha^{16} & \dots & \alpha^2 & \alpha^1 & \alpha^0 \end{bmatrix}$$

$$V_R = \begin{bmatrix} D_n \times 2 + i \times 33408 + 0 + 0 \times 66816 \\ D_n \times 2 + i \times 33408 + 1 + 0 \times 66816 \\ D_n \times 2 + i \times 33408 + 0 + 1 \times 66816 \\ D_n \times 2 + i \times 33408 + 1 + 1 \times 66816 \\ D_n \times 2 + i \times 33408 + 0 + 2 \times 66816 \\ D_n \times 2 + i \times 33408 + 1 + 2 \times 66816 \\ D_n \times 2 + i \times 33408 + 0 + 3 \times 66816 \\ D_n \times 2 + i \times 33408 + 1 + 3 \times 66816 \\ D_n \times 2 + i \times 33408 + 0 + 4 \times 66816 \\ D_n \times 2 + i \times 33408 + 1 + 4 \times 66816 \\ D_n \times 2 + i \times 33408 + 0 + 5 \times 66816 \\ D_n \times 2 + i \times 33408 + 1 + 5 \times 66816 \\ D_n \times 2 + i \times 33408 + 0 + 6 \times 66816 \\ D_n \times 2 + i \times 33408 + 1 + 6 \times 66816 \\ \cdot \\ \cdot \\ \cdot \\ P_n \times 2 + i \times 33408 + 0 + 19 \times 66816 \\ Q_n \times 2 + i \times 33408 + 1 + 19 \times 66816 \end{bmatrix}$$

$$n = 0, 1, 2, \dots, 33\,407$$

$$i = 0, 1$$

$$D_n = \text{User data byte number}$$

$$P_n = \text{Parity byte number}$$

$$Q_n = \text{Parity byte number}$$

16.5.4 Multiple Recorded Instances

Each Basic Group, other than Basic Group No. 0, may be recorded in a sequence of contiguous instances. The maximum number of such instances shall be 8. Within a sequence of Recorded Data Groups which are derived from the same Basic Group the values of Logical Frame ID, Position and AFN will be different. There will also be differences in the values of the Parity bytes computed from these. There may also be differences in the number of Repeated Frames per Recorded Data Group in such a sequence.

16.5.5 Repeated Frames

In the Data Area, a Frame within a Recorded Data Group may be repeated by rewriting it further along the tape. The repeated Frame may be written after zero, one, two, three, four, five, six or seven other Frames have been written. Each such sequence (i.e. the original or repeated Frame and the zero, one, two, three, four, five, six or seven following Frames) can be repeated multiple times, e.g. to allow skipping over bad areas on the tape. The maximum number of instances of a sequence shall be 256, i.e. the original and up to 255 repetitions.

Intermediate Frames, i.e. those Frames written between the original Frame and its next occurrence shall start with the Frame the Logical Frame Number of which is the next in the normal sequence, and shall follow the correct sequence thereafter. The correct sequence requires successive Frames to have Logical Frame Numbers which increment by one until the last Frame in the Recorded Data Group, or the ECC3 Frames if present, after which they restart from 0 (for an Amble Frame) or one (for the first Frame of the next Recorded Data Group). Amble Frames are allowed in this sequence, provided the limit of seven Intermediate Frames is not exceeded. The final occurrence of the repeated Frame shall be followed by the Intermediate Frames written in the correct sequence. Discontinuities or repeated AFNs shall not occur.

16.5.6 Appending and overwriting

When new data is appended to data already recorded on tape, or existing data is overwritten by new data, the point at which recording may start shall be referenced to the last Frame (Frame A in figure 46) of a Recorded Data Group. If Multiple Recorded Instances of the last group exist, the relevant Recorded Data Group is the last in the sequence. If Repeated Frames have been recorded, the relevant Frame is the last repetition of the last Frame. The smallest unit of appending or overwriting is a Recorded Data Group.

Note - After overwriting commences, all data between the current recording point and PEOT is logically inaccessible.

The rules for appending and overwriting are identical. For simplicity, the following description refers only to appending.

Data may be appended to the tape by either the seamless or non-seamless methods. An appending operation may be described as seamless only if the appended tracks are placed so as to form a continuous sequence with the previous tracks. No track shall be partially overwritten to the point of being unreadable nor shall any gaps be left between tracks.

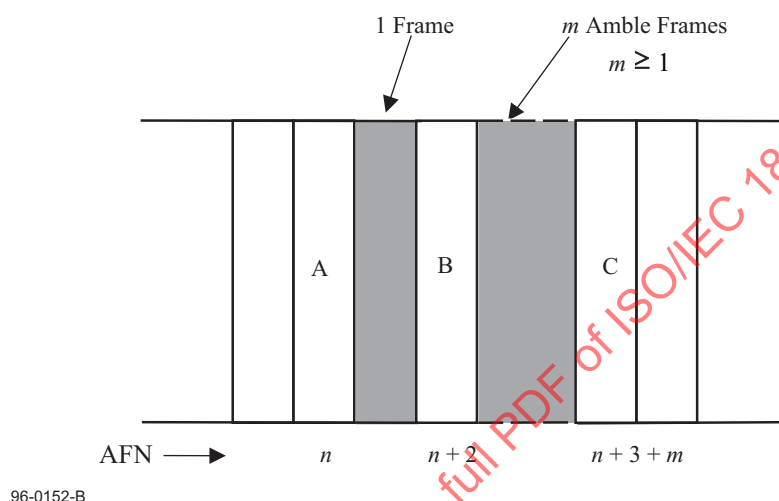


Figure 46 - Appending rules

The Frames up to, and including, Frame A on figure 46 contain information which is to be retained. The append starts with Amble Frames at Frame B and the information at Frame C.

16.5.6.1 Seamless appending rules

Rule 1. There shall be one Frame between Frame A and Frame B, i.e. if Frame A has AFN n , then Frame B shall have AFN $n+2$.

Rule 2. The Frame written between Frames A and B shall be contiguous with Frame A, i.e. no unrecorded space between A and B is permitted, nor is any discontinuity or repetition of AFNs, nor is any physical discontinuity. The Group Number of this Frame shall be greater than that of Frame A, unless this Frame is an Amble Frame, in which case its Group Number shall be equal to that of Frame A. The content of this Frame shall be ignored.

Rule 3. There shall be a minimum of one Amble Frame between Frames B and C, i.e. if Frame B has AFN $n+2$, then Frame C shall have AFN $n+4$ minimum. No unrecorded space, physical discontinuity, or AFN discontinuity or repetition is allowed between Frames B and C.

Rule 4. The position of the first track of Frame B (AFN $n+2$), as measured along the length of the tape at the point shown in figure 47, shall be at a distance of $x = 257,8 \mu\text{m} \pm 42,9 \mu\text{m}$ from the first track of the Frame with AFN $n+1$.

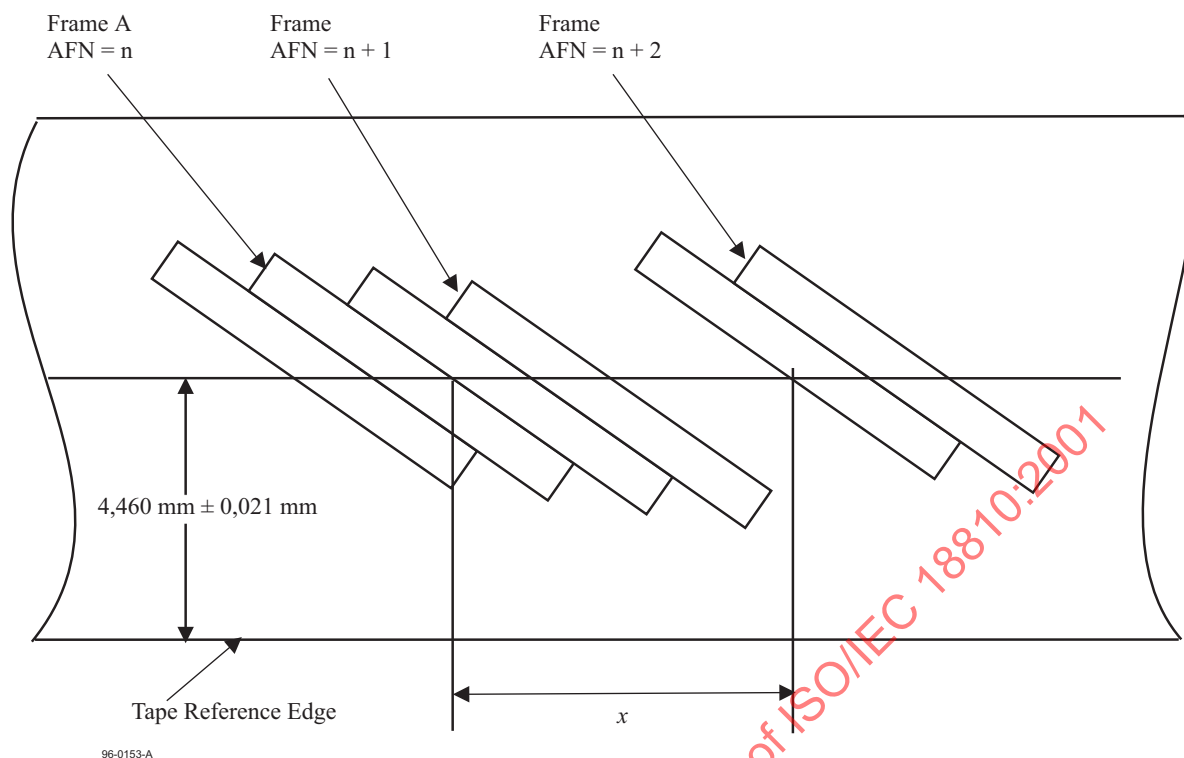


Figure 47 - Tolerance on seamless appending

16.5.6.2 Non-seamless appending rules

Rule 1. The distance between Frame A and Frame B shall be sufficient for a minimum of 1 and a maximum of 11 Frames. No unrecorded space shall be permitted between Frame A and Frame B. One or more Frames between Frame A and Frame B may be ill-defined, e.g., as a result of partial overwriting at an append point.

Rule 2. Discontinuities and repetitions of AFN are permitted between Frame A and Frame B, provided that, where Frame A has AFN n ,

- all Frames have an AFN greater than n , and
- Frame B has AFN $n+2$ min. and AFN $n+12$ max.

Rule 3. Amble Frames between Frame A and Frame B shall have a value of Group Number which is equal to that of Frame A. Other Frames between Frame A and Frame B shall have a value of Group Number which is greater than that of Frame A.

Rule 4. There shall be a minimum of 29 Frames between Frames B and C, i.e. if Frame B has AFN n' , where $n+2 \leq n' \leq n+12$, then Frame C shall have AFN $n'+30$ minimum. No unrecorded space, physical discontinuity or seam or AFN discontinuity or repetition shall be allowed between Frames B and C.

16.6 EOD Area

The Data Area shall be followed by an EOD Area.

In the last partition, it shall consist of a minimum of 300 Amble Frames, and shall start after the last Amble Frame in the sequence of Amble Frames which follows the last Recorded Data Group. The first Frame of the EOD Area shall be recorded at least 5 000 mm before PEOT.

More than one EOD Area may exist on the tape. More than one EOD Area may exist on a Partition. The EOD Area closest to LBOT in a partition shall be the only one valid for information interchange.

In all partitions, if the length of tape between the last Amble Frame and LEOT is greater than, or equal to, 300 Frames, the EOD Area shall consist of at least 300 Frames. If the length of tape between the last Amble Frame and LEOT is less than 300 Frames, the length of the EOD Area shall be equal to that length.

16.7 Optional Device Area

The EOD Area may be followed by an Optional Device Area which extends up to the Partition Boundary or PEOT. The contents of this Optional Device Area are not defined for interchange.