

NFPA No.


33



6690529

SPRAY FINISHING 1969

JUL 9 1969

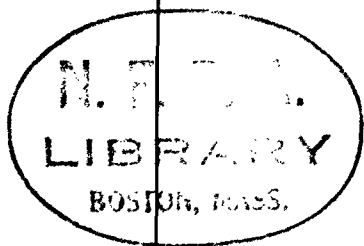

\$1.25

Copyright © 1969

NATIONAL FIRE PROTECTION ASSOCIATION
International

60 Battery March Street, Boston, Mass. 02110

Official NFPA Definitions

Adopted Jan. 23, 1964. Where variances to these definitions are found, efforts to eliminate such conflicts are in process.

SHALL is intended to indicate requirements.

SHOULD is intended to indicate recommendations or that which is advised but not required.

APPROVED means acceptable to the authority having jurisdiction. The National Fire Protection Association does not approve, inspect or certify any installations, procedures, equipment or materials nor does it approve or evaluate testing laboratories. In determining the acceptability of installations or procedures, equipment or materials, the authority having jurisdiction may base acceptance on compliance with NFPA or other appropriate standards. In the absence of such standards, said authority may require evidence of proper installation, procedure or use. The authority having jurisdiction may also refer to the listings or labeling practices of nationally recognized testing laboratories,* i.e., laboratories qualified and equipped to conduct the necessary tests, in a position to determine compliance with appropriate standards for the current production of listed items, and the satisfactory performance of such equipment or materials in actual usage.

*Among the laboratories nationally recognized by the authorities having jurisdiction in the United States and Canada are the Underwriters' Laboratories, Inc., the Factory Mutual Engineering Division, the American Gas Association Laboratories, the Underwriters' Laboratories of Canada, the Canadian Standards Association Testing Laboratories, and the Canadian Gas Association Approvals Division.

LISTED: Equipment or materials included in a list published by a nationally recognized testing laboratory that maintains periodic inspection of production of listed equipment or materials, and whose listing states either that the equipment or material meets nationally recognized standards or has been tested and found suitable for use in a specified manner.

LABELED: Equipment or materials to which has been attached a label of a nationally recognized testing laboratory that maintains periodic inspection of production of labeled equipment or materials, and by whose labeling is indicated compliance with nationally recognized standards or the conduct of tests to determine suitable usage in a specified manner.

AUTHORITY HAVING JURISDICTION: The organization, office or individual responsible for "approving" equipment, an installation, or a procedure.

Statement on NFPA Procedures

This material has been developed in the interest of safety to life and property under the published procedures of the National Fire Protection Association. These procedures are designed to assure the appointment of technically competent Committees having balanced representation from those vitally interested and active in the areas with which the Committees are concerned. These procedures provide that all Committee recommendations shall be published prior to action on them by the Association itself and that following this publication these recommendations shall be presented for adoption to the Annual Meeting of the Association where anyone in attendance, member or not, may present his views. While these procedures assure the highest degree of care, neither the National Fire Protection Association, its members, nor those participating in its activities accepts any liability resulting from compliance or non-compliance with the provisions given herein, for any restrictions imposed on materials or processes, or for the completeness of the text.

Copyright and Republishing Rights

This publication is copyrighted © by the National Fire Protection Association. Permission is granted to republish in full the material herein in laws, ordinances, regulations, administrative orders or similar documents issued by public authorities. All others desiring permission to reproduce this material in whole or in part shall consult the National Fire Protection Association.

Standard for Spray Finishing Using Flammable and Combustible Materials

NFPA No. 33 — 1969

1969 Edition of No. 33

This 1969 edition of the Standard for Spray Finishing Using Flammable and Combustible Materials was adopted by the National Fire Protection Association at its Annual Meeting held May 12-16, 1969 on recommendation of the NFPA Committee on Finishing Processes. It supersedes the edition of 1966.

Origin and Development of No. 33

The original NFPA standard on Paint Spraying and Spray Booths was initiated in 1921. The first edition was published in 1922 as part of a Standard on Dip Tanks (now NFPA No. 34). Revised editions were published in 1926, 1928, 1935, 1937, 1941, 1946, 1950, 1953, 1954, 1955, 1957, 1960, 1961, 1966 and 1969.

For amendments adopted in 1969, see page 33-50.

Committee on Finishing Processes

Clay B. Wade, Chairman,

South-Eastern Underwriters Assn., P.O. Box 29972, Atlanta, Ga. 30329

Warren M. Apgar, American Insurance Assn.

Calvin Beal, Westinghouse Electric Corp.

H. James Doolittle, The Travelers Insurance Cos.

Asst. Chief R. H. Ellison, Fire Marshals Assn. of North America.

Norman E. Gatsch, Jr., Ohio Inspection Bureau.

Paul J. Keller, National Paint, Varnish & Lacquer Assn.

John R. Marshall, General Motors Corp.

Emery P. Miller, Ransburg Electro-Coating Corp.

Frank R. Pitt, National Spray Painting and Finishing Association.

E. E. Roy, Factory Mutual Engineering Assn.

R. Kenneth Scott, North Carolina Fire Insurance Rating Bureau.

Herman H. Spaeth, Pacific Fire Rating Bureau.

Nicholas L. Talbot, Improved Risk Mutuals.

W. C. Westerberg, National Electrical Code Committee.

Alternates.

M. A. Bridgham, Improved Risk Mutuals. (Alternate to Nicholas L. Talbot)

D. P. Congdon, Factory Insurance Assn. (Alternate representative: Factory Insurance Assn.)

SCOPE: Control of fire and explosion hazards in paint spraying, dipping, fabric coating and impregnating, and other finishing processes except equipment within the scope of the Committee on Ovens and Furnaces.

CONTENTS

Foreword—Standard Requirements—Scope	33-3
1. Definitions	33-5
2. Location of Spray Finishing Operations	33-7
3. Spray Booths	33-9
4. Electrical and Other Sources of Ignition	33-12
5. Ventilation	33-15
6. Flammable and Combustible Liquids—Storage and Handling	33-18
7. Protection	33-20
8. Operations and Maintenance	33-22
9. Fixed Electrostatic Apparatus	33-24
10. Electrostatic Hand Spraying Equipment	33-26
11. Drying, Curing or Fusion Apparatus	33-28
12. Automobile Undercoating in Garages	33-30
13. Powder Coating	33-31
14. Organic Peroxides and Dual Component Coatings	33-34
 Appendix	
A-100. Scope	33-36
A-200. General	33-37
A-300. Spray Booths	33-38
A-400. Electrical and Other Sources of Ignition ..	33-38
A-500. Ventilation	33-39
A-700. Protection	33-44
A-800. Operations and Maintenance	33-45
A-900. Organic Peroxides	33-47
 Fire Record	 33-51

**Standard for
Spray Finishing Using Flammable
and Combustible Materials**

NFPA No. 33 — 1969

FOREWORD.

The safety of life and property from fire or explosion in the spray application of flammable and combustible paints and finishes depends upon the extent, arrangement, maintenance and operation of the process.

An analysis of actual experience in industry demonstrates that largest fire losses and fire frequency have occurred where good practice standards were not observed.

In order that the best practical arrangement may be obtained for the particular installation involved and in order that the Standard Requirements may be more clearly understood, an informative Appendix discussing the basic hazards and appropriate safeguards is included in this pamphlet.

The reader is referred to the following other NFPA Standards as being related to this general field of interest:

Fundamental Principles for Prevention of Dust Explosions in Industrial Plants (NFPA No. 63)

National Electrical Code (NFPA No. 70)

Ovens and Furnaces (NFPA No. 86A)

Blowers and Exhaust Systems (NFPA No. 91)

Prevention of Dust Explosions in the Plastics Industry (NFPA No. 654)

STANDARD REQUIREMENTS.

SCOPE.

1. This Standard covers the application of flammable or combustible finishing materials when applied as a spray by compressed air, "airless" or "hydraulic atomization," or by steam, or electrostatic methods or by any other means in continuous or intermittent processes. It also covers the application of combustible powders when applied by powder spray guns, electrostatic powder spray guns, fluidized beds or electrostatic fluidized beds.

2. This Standard outlines practical minimum requirements to obtain reasonable safety under average contemplated conditions. Where unusual industrial processes are involved the authority having jurisdiction may for substantiated cause require additional safeguards or modify the requirements of this Standard provided equivalent safety is thereby obtained.

NOTE—See also Appendix A-100.

3. This Standard does not cover outdoor spray application of buildings, tanks or other similar structures, nor small portable spraying apparatus not used repeatedly in the same location; however, the herein described fundamental safeguards pertaining to cleanliness, care of flammable liquids, dangerous vapor-air mixtures and sources of ignition should be followed where applicable.

4. This Standard does not cover the spray application of noncombustible finishing material. Certain water-emulsion liquids, however, although involving little or no hazard in the liquid state may leave highly combustible residues upon evaporation of the liquid carrier. The provisions of this standard for minimizing the hazards of combustible residues should be followed irrespective of the characteristics of the liquid.

CHAPTER 1.

DEFINITIONS.

101. **APPROVED** signifies acceptance, by the authority having jurisdiction, of design, equipment, installation, or intended use as required by this Standard.

NOTE: Devices having been tested and accepted for a specific purpose by a nationally recognized testing laboratory may be deemed acceptable.

102. **LIQUIDS.** Flammable liquid shall mean any liquid having a flash point below 140° F. (60° C.) closed cup and having a vapor pressure not exceeding 40 pounds per square inch absolute (2068.6 mm) at 100° F. (37.8° C.). Combustible liquid shall mean any liquid having a flash point at or above 140° F. (60° C.). For further classification see Basic Classification of Flammable and Combustible Liquids—NFPA No. 321.

103. **AERATED SOLID POWDERS.** Aerated powders shall mean any powdered material used as a coating material which shall be fluidized within a container by passing air uniformly from below. It is common practice to fluidize such materials to form a fluidized powder bed and then dip the part to be coated into the bed in a manner similar to that used in liquid dipping. Such beds are also used as sources for powder spray operations. The combustibility of such materials may be determined by reference to the Standard for the Prevention of Dust Explosions in the Plastics Industry (NFPA No. 654).

104. **SPRAYING AREA.** Any area in which dangerous quantities of flammable vapors or mists, or combustible residues, dusts or deposits are present due to the operation of spraying processes.

A spraying area includes:

- (a) The interior of spray booths except as specifically provided in Section 1104.
- (b) The interior of ducts exhausting from spraying processes.
- (c) Any area in the direct path of spray or any area containing dangerous quantities of air-suspended powder or air-suspended combustible residue, dust, deposits, vapor or mists as a result of spraying operations.

The authority having jurisdiction may, for the purpose of this standard, define the limits of the spraying area in any specific case.

NOTE: The "spraying area" in the vicinity of spraying operations will necessarily vary with the design and arrangement of equipment and method of operation.

When spraying operations are strictly confined to predetermined spaces which are provided with adequate and reliable ventilation, such as a properly constructed spray booth, the "spraying area" should ordinarily not extend beyond the booth enclosure.

When, however, spraying operations are not confined to adequately ventilated spaces the "spraying area" may extend throughout the entire room containing spraying operations.

105. SPRAY BOOTH. A power-ventilated structure provided to enclose or accommodate a spraying operation, to confine and limit the escape of spray, vapor and residue, and to safely conduct or direct them to an exhaust system.

106. WATERWASH SPRAY BOOTH. A spray booth equipped with a water washing system designed to minimize dusts or residues entering exhaust ducts and to permit the recovery of overspray finishing material.

107. DRY SPRAY BOOTH. A spray booth not equipped with a water washing system as described in Section 105. A dry spray booth may be equipped with (1) distribution or baffle plates to promote an even flow of air through booth or cause deposit of overspray before it enters exhaust duct; or (2) overspray dry filters to minimize dusts or residues entering exhaust ducts; or (3) overspray dry filter rolls designed to minimize dusts or residues entering exhaust ducts; or (4) where dry powders are being sprayed, with powder collection systems so arranged in the exhaust to capture oversprayed material.

108. FLUIDIZED BED. A container holding powder coating material which is aerated from below so as to form an air-supported expanded cloud of such material through which the preheated object to be coated is immersed and transported.

109. ELECTROSTATIC FLUIDIZED BED. A container holding powder coating material which is aerated from below so as to form an air-supported expanded cloud of such material which is electrically charged with a charge opposite to the charge of the object to be coated; such object is transported through the container immediately above the charged and aerated materials in order to be coated.

CHAPTER 2.

LOCATION OF SPRAY FINISHING OPERATIONS.

201. Spray finishing operations within the Scope of this Standard should be confined to properly designed and constructed spray booths or spray rooms. Structures housing finishing operations should preferably be one story in height and separated from other important buildings by adequate clear space or standard fire walls and provided with automatic sprinkler protection.

202. Spray finishing operations shall not be conducted in a building classified as assembly, educational, institutional or residential, except in a room designed for the purpose, protected with an approved system of automatic sprinklers and separated vertically and horizontally from such occupancies by noncombustible construction having not less than 2 hours fire resistance.

203. (a) In industrial and similar business buildings, spray finishing operations should be so located and protected as to minimize possible damage to other property by fire or by extinguishing agents.

(b) Where spray finishing operations are located on upper floors of buildings, they should not be located immediately over high concentrations of damageable goods and positive provisions should be made for the waterproofing and drainage of the floor of the spraying area.

(c) Waterproof floors shall be arranged to drain to the outside of building, internal drains or other suitable place. Properly designed and guarded drains or scuppers of sufficient number and size to dispose of all surplus water likely to be discharged by automatic sprinklers over the waterproof area shall be provided, conforming to Standard for Waterproofing of Floors and Drainage and the Installation of Scuppers (NFPA No. 92).

204. Spray finishing operations preferably should not be conducted in any basement area.

205. Rooms containing spray finishing operations should preferably be separated from other occupancies by tight fitting partitions. In sprinklered buildings, rooms of extensive area having spray finishing operations should be provided with non-combustible draft curtains, extending downward from ceilings as far as practical but not less than 18 inches. Such curtains aid in preventing the opening of sprinklers outside the area enclosed by curtains and tend to confine the discharge of water to the immediate area of the fire.

CHAPTER 3. SPRAY BOOTHS.

301. Spray booths shall be substantially constructed of steel not thinner than No. 18 U. S. gauge, securely and rigidly supported, or of concrete or masonry, except that aluminum or other substantial non-combustible material may be used for intermittent or low volume spraying, subject to the approval of the authority having jurisdiction. Spray booths shall be designed to sweep air currents toward the exhaust outlet.

302. The interior surfaces of spray booths shall be smooth and continuous without edges and otherwise designed to prevent pocketing of residues and facilitate cleaning and washing without injury.

303. The floor surface of a spray booth and operator's working area, if combustible, shall be covered with non-combustible material of such character as to facilitate the safe cleaning and removal of residues.

304. Distribution or baffle plates, if installed to promote an even flow of air through booth or cause the deposit of overspray before it enters exhaust duct, shall be of non-combustible material and readily removable or accessible on both sides for cleaning. Such plates shall not be located in exhaust ducts.

305. Dry Type Overspray Collectors — (Exhaust Air Filters). In conventional dry type spray booths, overspray dry filters or filter rolls, if installed, shall conform to the following:

(a) The spraying operations except electrostatic spraying operations shall be so designed, installed and maintained that the average air velocity over the open face of the booth (or booth cross section during spraying operations) shall be not less than 100 linear feet per minute. Electrostatic spraying operations may be conducted with an air velocity over the open face of the booth of not less than 60 linear feet per minute, or more, depending on the volume of the finishing material being applied and its flammability and explosion characteristics. Visible gauges or audible

alarm or pressure activated devices shall be installed to indicate or insure that the required air velocity is maintained. Dry spray booths equipped with a filter roll which is automatically advanced when the air velocity is reduced to that specified in this paragraph, should be arranged to cause shut down of spraying operations if the filter roll fails to advance automatically.

Maintenance procedures should be established to assure replacing filter pads before excessive restriction to air flow occurs. Filter pads should be inspected after each period of use and clogged filter pads discarded and replaced. Filter rolls shall be inspected to insure proper replacement of filter media.

(b) All discarded filter pads and filter rolls shall be immediately removed to a safe, well detached location or placed in a water-filled metal container and disposed of at the close of the day's operation unless maintained completely in water.

(c) The location of filters in a spray booth shall be so as to not reduce the effective booth enclosure of the articles being sprayed.

(d) Space within spray booth on the down stream and up stream sides of filters shall be protected with approved automatic sprinklers.

(e) Filters or filter rolls shall not be used when applying a spray material known to be highly susceptible to spontaneous heating and ignition.

(f) Clean filters or filter rolls shall be noncombustible or of a type having a combustibility not in excess of Class 2 filters as listed by Underwriters' Laboratories, Inc.

(g) Filters and filter rolls shall not be alternately used for different types of coating materials, where the combination of materials may be conducive to spontaneous ignition. See also Section 809.

306. Each spray booth having a frontal area larger than nine square feet shall have a metal deflector or curtain not less than 2½ inches deep installed at the upper outer edge of the booth, over the opening.

307. Where conveyors are arranged to carry work into or out of spray booths, the openings therefor shall be as small as practical.

308. Each spray booth shall be separated from other operations by not less than three feet, or by a greater distance, or by such partition or wall as the inspection department having jurisdiction may require to reduce the danger from juxtaposition of hazardous operations. Where dipping, drying or baking operations are permitted in the same room with spraying operations, the authority having jurisdiction should be consulted before installation. (See also Section 401.)

309. Spray booths shall be so installed that all portions are readily accessible for cleaning. A clear space of not less than three feet on all sides shall be kept free from storage or combustible construction.

310. When spraying areas are illuminated through glass panels or other transparent materials, only fixed lighting units shall be used as a source of illumination. Panels shall effectively isolate the spraying area from the area in which the lighting unit is located, and shall be of a non-combustible material of such a nature or so protected that breakage will be unlikely. Panels shall be so arranged that normal accumulations of residue on the exposed surface of the panel will not be raised to a dangerous temperature by radiation or conduction from the source of illumination.

CHAPTER 4.

**ELECTRICAL AND OTHER SOURCES OF
IGNITION.**

401. All electrical equipment, open flames and other sources of ignition shall conform to the requirements of Chapter 4, except as follows:

(a) Electrostatic apparatus shall conform to the requirements of Chapters 9 and 10;

(b) Drying, curing and fusion apparatus shall conform to the requirements of Chapter 11;

(c) Automobile undercoating spray operations in garages shall conform to the requirements of Chapter 12.

(d) Powder coating equipment shall conform to the requirements of Chapter 13.

402. There shall be no open flame or spark producing equipment in any spraying area as herein defined, nor within 20 feet thereof, unless separated by a partition.

403. Space heating appliances, steam pipes or hot surfaces shall not be located in a spraying area where deposits of combustible residues may readily accumulate.

High pressure steam pipes and equipment in connection with steam spraying processes should be covered with standard molded magnesia insulation 1½ inches thick or the equivalent and be provided with a clearance of at least 1 inch between insulation and combustible material or combustible construction. Pipe covering should have sewed canvas cemented surface finish or the equivalent.

404. Electrical wiring and equipment shall conform to the provisions of this section and shall otherwise be in accordance with the National Electrical Code (NFPA No. 70).

405. Unless specifically approved for locations containing both deposits of readily ignitable residue and explosive vapors, there shall be no electrical equipment in any spraying area, as

herein defined, whereon deposits of combustible residues may readily accumulate, except wiring in rigid conduit or in boxes or fittings containing no taps, splices or terminal connections.

406. Electrical wiring and equipment not subject to deposits of combustible residues but located in a spraying area as herein defined shall be of explosion-proof type approved, for Class I, Group D locations and shall otherwise conform to the provisions of the National Electrical Code (NFPA No. 70) for Class I, Division 1 Hazardous Locations. (See Articles 500, 501 and 516 of the Code.)

407. Electrical wiring, motors, and other equipment outside of but within twenty (20) feet of any spraying area, as herein defined, and not separated therefrom by partitions, shall not produce sparks under normal operating conditions and shall otherwise conform to the provisions of the National Electrical Code (NFPA No. 70) for Class I, Division 2 Hazardous Locations. (See Articles 500, 501 and 516 of the Code.)

408. Electric lamps outside of, but within twenty (20) feet of any spraying area as herein defined, and not separated therefrom by a partition, shall be totally enclosed to prevent the falling of hot particles and shall be protected from mechanical injury by suitable guards or by location.

409. Portable electric lamps shall not be used in any spraying area during spraying operations. Portable electric lamps, if used during cleaning or repairing operations, shall be of the type approved for hazardous Class I locations.

410. All metal parts of spray booths, exhaust ducts and piping systems conveying flammable or combustible liquids or aerated solids shall be properly electrically grounded in an effective and permanent manner.

"Airless" high fluid pressure spray guns and any conductive object being sprayed should be properly electrically grounded.

NOTES ON ELECTRICAL INSTALLATIONS.

(1) As stipulated in Definitions (Section 104) the authority having jurisdiction may, for any specific installation, determine the extent of the hazardous "spraying area."

(2) From the above Section 405 it will be noted that in general electrical equipment is not permitted inside any spray booth, in the exhaust duct from a spray booth, in the entrained air of an exhaust system from a spraying operation or in the direct path of spray,

unless such equipment is specifically approved for both readily ignitable deposits and flammable vapor. At present no such equipment is approved by a nationally recognized laboratory. Electric motors driving exhaust fans are specifically prohibited inside spray booths and exhaust ducts under Section 506.

(3) From the above Section 406, it will be noted that when electrical equipment is installed in locations not subject to deposits of combustible residues but, due to inadequate ventilation, is subject to explosive concentrations of flammable vapors or mists, only approved explosion-proof equipment is permitted.

(4) When spraying operations are confined to adequately ventilated spray booths there should be no dangerous concentrations of flammable vapors or mists, nor deposits of combustible residues outside of the spray booth under normal operating conditions.

In the interest of safety, however, it will be noted that unless separated by partitions, the area within 20 feet of the hazardous "spraying area" is considered Division 2, that is, it should contain no equipment which produces sparks under normal operation. Furthermore, within this 20-foot distance electric lamps must be enclosed to prevent hot particles falling on freshly painted stock or other readily ignitable material and if subject to mechanical injury must be properly guarded.

(5) It will be observed that because of the requirements of special safeguards, electrostatic apparatus, drying, curing, or fusion apparatus and automobile undercoating spray operations in garages are covered in separate chapters.

CHAPTER 5.

VENTILATION.

501. Ventilating and exhaust systems shall be in accordance with the NFPA Standard for Blower and Exhaust Systems for Vapor Removal (No. 91) where applicable and shall also conform to provisions of this section.

502. All spraying areas shall be provided with mechanical ventilation adequate to remove flammable vapors, mists or powders to a safe location and to confine and control combustible residues so that life or property is not endangered.

503. Mechanical ventilation shall be kept in operation at all times while spraying operations are being conducted and for a sufficient time thereafter to allow vapors from drying coated articles and drying finishing material residue to be exhausted. When spray is automatically applied without an attendant constantly on duty and, where practical, when spraying is under manual control, the operating control of spray apparatus should be so arranged that spray cannot be applied unless exhaust fans are in operation.

504. Each spray booth shall have an independent exhaust duct system discharging to building exterior, except multiple cabinet spray booths in which identical spray finishing material is used with a combined frontal area of not more than eighteen square feet may have a common exhaust. If more than one fan serves one booth, all fans shall be so interconnected that one fan cannot operate without operating all.

505. Fan rotating element shall be non-ferrous or non-sparking or the casing shall consist of or be lined with such material. There shall be ample clearance between fan rotating element and fan casing to avoid a fire by friction, necessary allowance being made for ordinary expansion and loading to prevent contact between moving parts and the duct or fan housing. Fan blades shall be mounted on a shaft sufficiently heavy to maintain perfect alignment even when the blades of the fan are heavily loaded, the shaft preferably to have bearings outside the duct and booth. All bearings shall be of the self-lubricating type, or lubricated from outside duct.

506. Electric motors driving exhaust fans shall not be placed inside booths or ducts. (See also Chapter 4.)

507. Belts shall not enter duct or booth unless belt and pulley within the duct or booth are thoroughly enclosed.

508. Exhaust ducts shall be constructed of steel and shall be substantially supported. Exhaust ducts without dampers are preferred; however, if dampers are installed, they shall be maintained so that they will be in a full open position at all times the ventilating system is in operation. When spray booths are not in use and it is necessary to shut off ducts during cold weather, noncombustible removable covers completely closing ducts may be used.

509. (a) Exhaust ducts shall be protected against mechanical damage and have a clearance from unprotected combustible construction or other combustible material of not less than 18 inches.

(b) If combustible construction is provided with the following protection applied to all surfaces within 18 inches, clearances may be reduced to the distances indicated:

- (1) 28 gauge sheet metal on ¼-inch asbestos mill board..... 12 inches
- (2) 28 gauge sheet metal on ⅛-inch asbestos mill board spaced out one inch on non-combustible spacers.... 9 inches
- (3) 22 gauge sheet metal on 1-inch rock-wool bats reinforced with wire mesh or the equivalent..... 3 inches
- (4) Where ducts are protected with an approved automatic sprinkler system, properly maintained; the clearance required in Section 509(a) may be reduced to 6 inches

510. Unless spray booth exhaust duct terminal is from a waterwash spray booth, the terminal discharge point shall be not less than six feet from any combustible exterior wall or roof nor discharge in the direction of any combustible construction or unprotected opening in any non-combustible exterior wall within 25 feet.

511. Air exhausted from spray operations shall not be directed so that it will contaminate make-up air being introduced into the spraying area or other ventilating intakes, nor directed so as to create a nuisance. For high volume spraying, waterwash spray booths are recommended.

512. Air exhausted from spray operations shall not be recirculated. Safe arrangements should be provided for an adequate supply of make-up air to compensate for air exhausted from spraying operations. Exhaust ducts should pass directly through the nearest outside wall or through the building roof. Ducts should not pass through fire walls or floors.

513. When necessary to facilitate cleaning, exhaust ducts shall be provided with an ample number of access doors.

514. Air intake openings to rooms containing spray finishing operations shall be adequate for the efficient operation of exhaust fans and shall be so located as to minimize the creation of dead air pockets.

515. Freshly sprayed articles shall be dried only in spaces provided with adequate ventilation to prevent the formation of explosive vapors. In the event adequate and reliable ventilation is not provided such drying spaces shall be considered a spraying area as herein defined. (See also Chapter 11.)

CHAPTER 6.

FLAMMABLE AND COMBUSTIBLE LIQUIDS — STORAGE AND HANDLING.

601. The storage of flammable or combustible liquids in connection with spraying operations shall conform to the requirements of the Flammable and Combustible Liquids Code (NFPA No. 30), where applicable.

602. The quantity of flammable or combustible liquids kept in the vicinity of spraying operations shall be the minimum required for operations and should ordinarily not exceed a supply for one day or one shift. Bulk storage of portable containers of flammable or combustible liquids shall be in a separate, properly constructed building detached from other important buildings or cut off in a standard manner.

603. Where spraying is only occasional and involves the use of many different colors or types of flammable or combustible liquids, not exceeding a total quantity of 50 gallons in original closed containers may be stored in a properly constructed metal cabinet located near spraying operations.

604. Original closed containers, approved portable tanks, approved safety cans or a properly arranged system of piping shall be used for bringing flammable or combustible liquids into spray finishing room. Open or glass containers shall not be used.

605. Except as provided in Section 608 the withdrawal of flammable and combustible liquids from containers having a capacity of greater than 60 gallons shall be by approved pumps. For withdrawal from portable drums, hand pumps are recommended.

606. The withdrawal of flammable or combustible liquids from containers and the filling of containers, including portable mixing tanks, shall be done only in a suitable mixing room or in a spraying area when the ventilating system is in operation. Adequate precautions shall be taken to protect against liquid spillage and sources of ignition.

607. Containers supplying spray nozzles shall be of closed type or provided with metal covers kept closed. Containers not

resting on floors shall be on metal supports or suspended by wire cables. Containers supplying spray nozzles by gravity flow shall not exceed 10 gallons capacity.

608. Original shipping containers shall not be subjected to air pressure for supplying spray nozzles. Containers under air pressure supplying spray nozzles shall be of limited capacity, not exceeding that necessary for one day's operation; shall be designed and approved for such use; shall be provided with a visible pressure gauge; and shall be provided with a relief valve set to operate in conformance with the requirements of the ASME Code for Unfired Pressure Vessels.

609. Containers under air pressure supplying spray nozzles, air storage tanks and coolers shall conform to the standards of the ASME Code for unfired pressure vessels for construction, tests and maintenance.

610. (a) All containers or piping to which is attached a hose or flexible connection shall be provided with a shutoff valve at the connection. Such valves shall be kept shut when spraying operations are not being conducted.

(b) When a pump is used to deliver products, automatic means shall be provided to prevent pressure in excess of the design working pressure of accessories, piping and hose.

(c) All pressure hose and couplings shall be inspected at regular intervals appropriate to this service. At least weekly inspections are recommended. With the hose extended, test the hose and couplings using the "in service maximum operating pressures". Any hose showing material deteriorations, signs of leakage or weakness in its carcass or at the couplings, shall be withdrawn from service and repaired or discarded.

611. If a spray liquid heater is used it should preferably be low-pressure steam or hot water type. If electric, it shall be approved and listed for the specific location in which it is used. (See Chapter 4) Heaters shall not be located in spray booths nor other locations subject to the accumulation of deposits or combustible residue. Agitators, if used, should preferably be driven by compressed air, water or low-pressure steam. If electric motor is used, see Chapter 4.

612. (a) Unless flammable and combustible liquid piping, hose and equipment have been designed to meet the require-

ments of high pressure processes (airless atomization) employing pressures in excess of 100 psig, existing circulating systems should not be used for this purpose.

(b) If flammable or combustible liquids are supplied to spray nozzles by positive displacement pumps, pump discharge line shall be provided with an approved relief valve discharging to pump suction or a safe detached location, or a device provided to stop the prime mover if the discharge pressure exceeds the safe operating pressure of the system.

613. (a) Whenever flammable or combustible liquids are transferred from one container to another, both containers shall be effectively bonded and grounded to prevent discharge sparks of static electricity.

(b) Piping systems conveying flammable or combustible liquids shall be of steel or other material having comparable properties of resistance to heat and physical damage; they should be so installed that a rupture of the system for any reason is unlikely. Piping systems shall be properly bonded and grounded.

CHAPTER 7.

PROTECTION.

701. Spray finishing operations should preferably be located in buildings protected throughout with an approved system of automatic sprinklers.

702. In sprinklered buildings, the automatic sprinkler system in rooms containing spray finishing operations shall conform to the NFPA Standard for the Installation of Sprinkler Systems (No. 13), provisions for Extra Hazard Occupancy, and in unsprinklered buildings where sprinklers are installed only to protect spraying areas, the installation shall conform to such standards insofar as they may be applicable. Sprinkler installations shall also conform to the provisions of this section.

703. Sprinklers in rooms containing spray finishing operations should be on a wet pipe system.

704. Unusual or out-of-the-ordinary spray operations may require open head deluge or a combination of open and closed head automatic sprinkler protection, subject to the approval of the authority having jurisdiction.

705. Water supply for sprinklers in rooms containing spray finishing operations should be sufficient to supply all sprinklers likely to open in one fire without depleting the available water for use in hose streams. Where sprinklers are installed to protect spraying areas only, water may be furnished from the domestic supply, subject to the approval of the authority having jurisdiction.

706. Each spray booth having a frontal area in excess of nine square feet should be protected with an automatic system of one or more sprinklers. Sprinkler heads shall be located to effect water distribution throughout entire booth.

707. Interior of ducts should be protected with sprinklers. Such sprinklers should be installed not more than 12 feet apart in horizontal ducts and shall be accessible through duct access doors.

708. Automatic sprinklers protecting each spray booth (together with its connecting exhaust) shall be under an accessibly located separate OS&Y sub-control valve. Sprinkler systems in stacks or ducts should be automatic and of a type not subject to freezing.

709. Sprinklers protecting spraying areas shall be kept as free from deposits as practical by cleaning daily if necessary. (See also Chapter 8.)

710. An adequate supply of suitable portable fire extinguishers shall be installed near all spraying areas. (See NFPA Standards for Installation of Portable Fire Extinguishers, No. 10, and Maintenance and use of Portable Fire Extinguishers, No. 10A.)

CHAPTER 8.

OPERATIONS AND MAINTENANCE.

801. Spraying shall not be conducted outside of predetermined spraying areas and all provisions of this Standard applying to spraying areas should be strictly followed.

802. High pressure hose conveying flammable or combustible material in "airless" spray finishing operations should be frequently inspected and properly maintained. Hose and equipment should be so located that in the event of a leak or rupture, finishing material will not be discharged into any space having a source of ignition.

803. All spraying areas shall be kept as free from the accumulation of deposits of combustible residues as practical, with cleaning conducted daily if necessary.

804. Scrapers, spuds or other such tools used for cleaning purposes shall be of non-sparking material.

805. Residue scrapings and debris contaminated with residue shall be immediately removed from premises and properly disposed of.

806. Approved metal waste cans shall be provided wherever rags or waste are impregnated with finishing material and all such rags or waste deposited therein immediately after use. The contents of waste cans shall be properly disposed of at least once daily at the end of each shift.

807. Spray finishing employees' clothing shall not be left on the premises overnight unless kept in metal lockers.

808. Solvents for cleaning purposes should, where practical, preferably be of a type that will not burn.

The use of solvents for cleaning operations shall be restricted to those having flash points not less than 100 degrees F.; however, for cleaning spray nozzles and auxiliary equipment, solvents having flash points not less than those normally used in spray operations may be used.

Such cleaning shall be conducted inside spray booths and ventilating equipment operated during cleaning.

809. Spray booths shall not be alternately used for different types of coating materials, where the combination of the materials may be conducive to spontaneous ignition, unless

all deposits of the first used material are removed from the booth and exhaust ducts prior to spraying with the second. Examples of dangerous combinations are:

(a) Deposits of lacquers containing nitrocellulose with finishes containing drying oils, such as varnishes, oil-based stains, air-drying enamels, and primers.

(b) Bleaching compounds based on hydrogen peroxide, hypochlorites, perchlorates, or other oxidizing compounds, with any organic finishing materials.

810. If there are excessive accumulations of residue in booths, ducts or duct discharge points or other spraying areas, then all spraying operations should be discontinued until conditions are corrected.

811. "No SMOKING" signs in large letters on contrasting color background shall be conspicuously posted at all spraying areas and paint storage rooms.

812. Conspicuous signs should be posted at all spraying areas and paint storage rooms conveying the following warning:

NO WELDING—The use of welding or cutting equipment in, on, or around this spray booth and duct (or paint storage room) is dangerous because of fire and explosion. Welding and cutting shall be done only under the supervision of the foreman in charge.

CHAPTER 9.

FIXED ELECTROSTATIC APPARATUS.

900. Where installation and use of electrostatic spraying equipment is judged by enforcing authorities to be permissible, such installation and use shall conform to all other chapters of this Standard, and shall also conform to the requirements of this chapter.

901. Electrostatic apparatus and devices used in connection with coating operations shall be of approved types.

902. Transformers, power packs, control apparatus, and all other electrical portions of the equipment, with the exception of high voltage grids, electrodes and electrostatic atomizing heads and their connections, shall be located outside of the Spraying Area as defined in Chapter 1, or shall otherwise conform to the requirements of Chapter 4 of this Standard.

903. Electrodes and electrostatic atomizing heads shall be adequately supported in permanent locations and shall be effectively insulated from ground. Electrodes and electrostatic atomizing heads which are permanently attached to their bases, supports, or reciprocators, shall be deemed to comply with this section. Insulators shall be non-porous and non-combustible. Fine wire elements when used should be under tension at all times and should be of uninked hardened steel or material of comparable strength.

904. High voltage leads to electrodes shall be properly insulated and protected from mechanical injury or exposure to destructive chemicals. Electrostatic atomizing heads shall be effectively and permanently supported on suitable insulators and shall be effectively guarded against accidental contact or grounding. An automatic means shall be provided for grounding the electrode system when it is electrically de-energized for any reason.

905. A safe distance shall be maintained between goods being painted and electrodes or electrostatic atomizing heads or conductors of at least twice the sparking distance. A suitable sign indicating this safe distance shall be conspicuously posted near the assembly.

906. Goods being painted using this process are to be supported on conveyors. The conveyors shall be so arranged as to maintain safe distances between the goods and the electrodes or electrostatic atomizing heads at all times. Any irregularly

shaped or other goods subject to possible swinging or movement shall be rigidly supported to prevent such swinging or movement which would reduce the clearance to less than that specified in Section 905 .

907. This process is not approved where goods being coated are manipulated by hand. When finishing materials are applied by electrostatic equipment which is manipulated by hand, see Chapter 10 for applicable requirements.

908. Electrostatic apparatus shall be equipped with automatic controls which will operate without time delay to disconnect the power supply to the high voltage transformer and to signal the operator under any of the following conditions:

- (a) Stoppage of ventilating fans or failure of ventilating equipment from any cause.
- (b) Stoppage of the conveyor carrying goods through the high voltage field.
- (c) Occurrence of a ground or of an imminent ground at any point on the high voltage system.
- (d) Reduction of clearance below that specified in Section 905.

909. Adequate booths, fencing, railings or guards shall be so placed about the equipment that they, either by their location or character or both, assure that a safe isolation of the process is maintained from plant storage or personnel. Such railings, fencing and guards shall be of conducting material, adequately grounded, and should be at least 5 ft. from processing equipment.

910. Signs designating the process zone as dangerous as regards fire and accident should be posted.

911. All insulators shall be kept clean and dry.

912. Where electrostatic atomization is used the spraying area shall be so ventilated as to insure safe conditions from a fire and health standpoint. (See NFPA Standard for Blower and Exhaust Systems, No. 91.)

913. All areas used for spraying, including interior of booth, shall be protected by automatic sprinklers where this protection is available. Where this protection is not available, other approved automatic extinguishing equipment shall be provided.

CHAPTER 10.

ELECTROSTATIC HAND SPRAYING EQUIPMENT.

1001. This Chapter shall apply to any equipment using electrostatically charged elements for the atomization and (or) precipitation of materials for coatings on articles, or for other similar purposes in which the atomizing device is hand held and manipulated during the spraying operation.

1002. Electrostatic hand spraying equipment shall conform with the other provisions of this Standard and shall also conform to the provisions of Chapter 10.

1003. Electrostatic hand spray apparatus and devices used in connection with coating operations shall be of approved types. The equipment should be so designed that the maximum surface temperature of the equipment in the spraying area shall not exceed 150° F. under any condition. The high voltage circuits shall be designed so as to not produce a spark of sufficient intensity to ignite any vapor-air mixtures nor result in appreciable shock hazard upon coming in contact with a grounded object under all normal operating conditions. The electrostatically charged exposed elements of the hand gun shall be capable of being energized only by a switch which also controls the coating material supply.

1004. Transformers, power packs, control apparatus, and all other electrical portions of the equipment, with the exception of the hand gun itself and its connections to the power supply shall be located outside of the spraying area or shall otherwise conform to the requirements of Chapter 4 of this Standard.

1005. The handle of the spraying gun shall be electrically connected to ground by a metallic connection and be so constructed that the operator in normal operating position is in intimate electrical contact with the grounded handle. This requirement is to prevent buildup of a static charge on the operator's body.

1006. All electrically conductive objects in the spraying area shall be adequately grounded. This requirement shall apply to paint containers, wash cans and any other objects or devices in the area. The equipment shall carry a prominent permanently installed warning regarding the necessity for this grounding feature.

1007. Objects being painted or coated shall be maintained in metallic contact with the conveyor or other grounded support. Hooks shall be regularly cleaned to insure this contact and areas of contact shall be sharp points or knife edges where possible. Points of support of the object shall be concealed from random spray where feasible and where the objects being sprayed are supported from a conveyor, the point of attachment to the conveyor shall be so located as to not collect spray material during normal operation.

1008. The electrical equipment shall be so interlocked with the ventilation of spraying area that the equipment cannot be operated unless the ventilation fans are in operation.

1009. The spraying operation shall take place within a spray area which is adequately ventilated to remove solvent vapors released from the operation. See Section 305 (a).

CHAPTER 11.

DRYING, CURING OR FUSION APPARATUS.

1101. Drying, curing or fusion apparatus in connection with spray application of flammable and combustible finishes shall conform to the NFPA Standard for Ovens and Furnaces (No. 86A) where applicable and shall also conform to the following:

1102. Spray booths, rooms or other enclosures used for spraying operations shall not alternately be used for the purpose of drying by any arrangement which will cause a material increase in the surface temperature of the spray booth, room or enclosure.

NOTE: The susceptibility to spontaneous heating and ignition of over-spray residue may be greatly increased at temperatures above normal. Hence the use of hot air drying in a space which has been used for spray finishing may create a severe hazard.

1103. Except as specifically provided in Section 1104, drying, curing or fusion units utilizing a heating system having open flames or which may produce sparks shall not be installed in a spraying area as defined in Chapter 1, but may be installed adjacent thereto when equipped with an interlocked ventilating system arranged to:

- (a) Thoroughly ventilate the drying space before heating system can be started;
- (b) Maintain a safe atmosphere at any source of ignition;
- (c) Automatically shut down heating system in the event of failure of the ventilating system.

1104. Automobile refinishing spray booths or enclosures, otherwise installed and maintained in full conformity with this standard, may alternately be used for drying with portable electrical infra-red drying apparatus when conforming with the following:

- (a) Interior (especially floors) of spray enclosures shall be kept free of overspray deposits.
- (b) During spray operations, the drying apparatus and electrical connections and wiring thereto shall not be located within spray enclosure nor in any other location where spray residue may be deposited thereon.

(c) Spraying apparatus, drying apparatus, and ventilating system of spray enclosure shall be equipped with suitable interlocks so arranged that:

(1) Spraying apparatus cannot be operated while drying apparatus is inside spray enclosure.

(2) Spray enclosure will be purged of spray vapors for a period of not less than 3 minutes before drying apparatus can be energized.

(3) Ventilating system will maintain a safe atmosphere within the enclosure during the drying process and drying apparatus will automatically shut off in the event of failure of the ventilating system.

(d) All electrical wiring and equipment of drying apparatus shall conform to the applicable sections of the National Electrical Code (NFPA No. 70). Only equipment of a type approved for Class I, Division 2 hazardous locations shall be located within 18 inches of floor level. All metallic parts of drying apparatus shall be properly electrically bonded and grounded.

(e) Drying apparatus shall contain a prominently located, permanently attached warning sign indicating that ventilation should be maintained during the drying period and spraying should not be so conducted in the vicinity that spray will deposit on apparatus.

1105. It should be noted that in powder coating processes, the powder is heated after or during application to bring about its fusion into a complete integral film. During such fusion many powders may release hazardous vapors. For this reason all fusion facilities should be adequately ventilated to remove such vapors from the work areas.

CHAPTER 12.

AUTOMOBILE UNDERCOATING IN GARAGES.

1201. Automobile undercoating spray operations in garages, conducted in areas having adequate natural or mechanical ventilation, may be exempt from the requirements pertaining to spray finishing operations, when using undercoating materials not more hazardous than kerosene (as listed by Underwriters' Laboratories in respect to fire hazard rating 30-40) or undercoating materials using only solvents listed as having a flash point in excess of 100 degrees F. There should be no open flames or other sources of ignition within 20 feet while such operations are conducted.

1202. Undercoating spray operations not conforming to the provisions of Section 1201 are subject to all requirements of this standard pertaining to spray finishing operations.

CHAPTER 13. POWDER COATING.

1301. This chapter shall apply to finely ground particles of protective finishing material applied in dry powder form. The hazards associated with combustible dusts are inherent in this process. Generally speaking, the hazard rating of the powders employed is dependent upon the chemical composition of the material, particle size, shape and distribution.

1302. Equipment. Coating powders are applied by means of:

- (a) Fluidized bed.
- (b) Electrostatic fluidized bed.
- (c) Powder spray guns.
- (d) Electrostatic powder spray guns.

Each method requires certain essential protective measures that may be applicable only to that method, and in addition, all methods have certain protective requirements in common.

1303. LOCATION AND CONSTRUCTION OF POWDER COATING ROOMS AND BOOTHS. Powder coating operations should be conducted in either

- (a) Completely enclosed rooms constructed of noncombustible materials, or
- (b) Enclosed powder coating facilities which are adequately ventilated, or
- (c) Adequately ventilated spray booths meeting the requirements of Sections 301 through 303 and 306 through 310 of this Standard.

NOTE 1. Plastic booths are not recommended because of their combustibility or lack of heat resistance.

NOTE 2. Metal booths used in electrostatic powder coating operations may be coated with strippable spray booth shield which will minimize the deposition of oversprayed powders upon the walls and ceiling of the booth and prevent a chemical reaction which might occur if powder is in contact with metal.

1304. ELECTRICAL AND OTHER SOURCES OF IGNITION.

(a) Electrical equipment and other sources of ignition shall conform to the requirements of Sections 401(a)-401(d), 409 and 410 (first paragraph) of this Standard, and Article 502 of the National Electrical Code (NFPA No. 70).

(b) The application of powders by means of non-electrostatic fluidized bed or powder spray gun normally requires the part to

be pre-heated; pre-heating is also sometimes used with electrostatic equipment. Care must be taken to insure that the temperature of the part to be coated does not exceed the ignition temperature of the powder being used.

(c) Precautions should be taken to minimize the possibility of ignition by static electrical sparks, through static grounding, where possible, of powder transport, application and recovery equipment.

1305. VENTILATION.

(a) In addition to the provisions of Chapter 5, where applicable, exhaust ventilation shall be sufficient to maintain the atmosphere below the lowest explosive limits for the material being applied. All non-deposited air-suspended powders shall be safely removed via exhaust ducts to the powder recovery cyclone or receptacle. Due to the fact that powder particles are of various sizes and weights, and they are applied by various methods set forth in Paragraph 1302, no rates of exhaust are specified. Each installation shall be designed and operated to meet the foregoing performance specification.

(b) Powders shall not be released to the outside atmosphere.

NOTE: Practically all oversprayed powders may be recaptured and used, hence there is no justification for releasing powders to the atmosphere.

1306. DRYING, CURING OR FUSION EQUIPMENT.

(a) The application of powders sometimes requires that the part to be coated be preheated above the fusion temperature of the powder material. Care must be exercised that the part is not heated to a point in excess of the ignition temperature of the powder.

(b) The provisions of the Standard for Ovens and Furnaces (NFPA No. 86A) shall apply where applicable.

1307. OPERATION AND MAINTENANCE.

(a) All areas shall be kept free of the accumulation of powder coating dusts, particularly such horizontal surfaces as ledges, beams, pipes, hoods, booths and floors.

(b) Surfaces shall be cleaned in such manner as to avoid scattering dust to other places or creating dust clouds; vacuum sweeping equipment approved for use in hazardous locations should be used.

(c) Care should be exercised to prevent tramp iron or spark producing metals from being introduced into the powders being applied. Magnetic and filter type separators are recommended.

(d) "NO SMOKING" signs in large letters on contrasting color background shall be conspicuously posted at all powder coating areas and powder storage rooms.

1308. **FIXED ELECTROSTATIC SPRAYING EQUIPMENT.** The provisions of Chapter 9 and other sections of Chapter 13 of this Standard shall apply to fixed electrostatic equipment, except that electrical equipment not covered therein shall conform to Section 1304 of this chapter.

1309. **ELECTROSTATIC HAND SPRAYING EQUIPMENT.** The provisions of Chapter 10 and other sections of Chapter 13 of this Standard shall apply to electrostatic hand guns when used in powder coating, except that electrical equipment not covered therein shall conform to Section 1304 of this chapter.

1310. **ELECTROSTATIC FLUIDIZED BEDS.**

(a) Electrostatic fluidized beds and associated equipment shall be of approved types. The maximum surface temperature of this equipment in the coating area shall not exceed 150°F. The high voltage circuits shall be so designed as to not produce a spark of sufficient intensity to ignite any powder-air mixtures nor result in appreciable shock hazard upon coming in contact with a grounded object under normal operating conditions.

(b) Transformers, power packs, control apparatus and all other electrical portions of the equipment, with the exception of the charging electrodes and their connections to the power supply shall be located outside of the powder coating area or shall otherwise conform to the requirements of Section 1304 of this chapter.

(c) All electrically conductive objects within the charging influence of the electrodes shall be adequately grounded. The powder coating equipment shall carry a prominent, permanently installed warning regarding the necessity for grounding these objects.

(d) Objects being coated shall be maintained in contact with the conveyor or other support in order to insure proper grounding. Hangers shall be regularly cleaned to insure effective contact and areas of contact shall be sharp points or knife edges where possible.

(e) The electrical equipment shall be so interlocked with the ventilation system that the equipment cannot be operated unless the ventilation fans are in operation.

CHAPTER 14.

ORGANIC PEROXIDES AND DUAL COMPONENT COATINGS.

(For a general discussion of the hazards incident to the use of these materials, see Paragraph A. 900 of the Appendix.)

1401. All spraying operations involving the use of organic peroxides and other dual component coatings shall be conducted in approved sprinklered spray booths meeting the requirements of this Standard.

1402. (a) Extreme care should be exercised at all times in preventing the contamination of organic peroxide initiators with any foreign substance. Only spray guns and related handling equipment specifically manufactured for use with organic peroxides should be used. Separate pressure vessels and inserts specific for the application should be used for the resin and for the organic peroxide and they should not be interchanged.

(b) Organic peroxide pressure tank inserts should be constructed of stainless steel or polyethylene.

(c) Dusts or overspray residues resulting from the sanding or spraying of finishing materials containing organic peroxides if mixed with other materials may cause a fire or explosion; hence, care should be exercised to prevent any contamination from this source.

(d) All spilled peroxides should be promptly removed so there are no residues. Spilled material may be absorbed by using a noncombustible absorbent and then promptly disposed of in accordance with the manufacturer's recommendation.

1403. Organic peroxides should be stored in a cool, detached building apart from other finishing materials, and only minimum daily requirements should be brought to the processing area; such material remaining at the spraying station at the end of a day's operations should be carefully disposed of. Organic peroxides should be kept away from all sources of heat including steam pipes, radiators, open flames or sparks and solar radiation. See Appendix A. 900.

1404. Care should be exercised in handling organic peroxides to avoid shock and friction which can cause decomposition and violent reaction.

1405. Organic peroxides should not be mixed directly with any accelerators or promoters as violent decomposition or explosion may result.

1406. Smoking shall be prohibited and "NO SMOKING" signs shall be prominently displayed and only non-sparking tools shall be used in any area where organic peroxides are stored, mixed or applied.

1407. Only specifically trained personnel should be permitted to work with these materials.

APPENDIX.

A. 100. Scope. Flammable and combustible finishing materials contemplated by this standard do not ordinarily include water solutions nor water-emulsion liquids. Certain water-emulsion liquids, however, although involving little or no hazard in the liquid state, may leave highly combustible residues upon evaporation of the liquid carrier. The provisions of this standard for minimizing the hazards of combustible residues should be followed irrespective of the characteristics of the liquid carrier.

This standard does not cover the outdoor spraying of buildings, bridges, tanks or similar structures. With such occasional applications, over-spray deposits are not likely to create a hazardous condition and the space in which explosive vapor-air mixtures may be present is limited because of atmospheric dilution.

The occasional operation of small portable spraying apparatus for spraying building interiors and similar uses is such that hazardous accumulations of over-spray deposits are not likely to occur. Such operations are not within the scope of this standard.

When building or maintenance spraying are considered outside the scope of this standard by the authority having jurisdiction because of the infrequency of application, the following safeguards should be observed:

(a.) Adequate ventilation should be provided at all times when conducting indoor spraying operations, particularly in small enclosures.

(b.) Spraying should not be conducted in the vicinity of open flames or other sources of ignition.

(c.) Cans or other containers of paints, thinners or other protective coatings should be kept tightly closed at all times when they are not required to be open to replenish the supply of such material at the place of application.

(d.) Oily or paint laden rags or waste should be promptly disposed of at the end of each day's operations because of the danger of spontaneous ignition. The same fundamental requirements of cleanliness should be observed as are required in the spray application of coating materials in industrial processes.

A. 200. General. The safety of life and property from fire or explosion as a result of spray application of flammable and combustible paints and finishes may be severe or mild depending upon the arrangement and operation of a particular installation.

The principal hazards of spray operations originate from flammable or combustible liquids and their vapors or mists and from highly combustible residues which may be deposited in the area of operations.

Properly constructed spray booths, provided with adequate mechanical ventilation, may be so utilized as to discharge vapors to a safe location and reduce to a minimum the possibility of a vapor explosion. In like manner, the accumulation of overspray residues, many of which are not only highly combustible but subject to spontaneous ignition, can be controlled.

The elimination of all sources of ignition in areas where flammable or combustible liquids, vapors, mists or combustible residues are present, together with constant intelligent supervision and maintenance, are essential to the safe operations of spraying.

The human element necessitates careful consideration of the location of the operations and the installation of extinguishing equipment so that if a fire does occur the possibility of its spread to other property will be reduced and the probability of damage to other property by extinguishing agents will be minimized.

In factories conducting extensive spray finishing, it is desirable that finishing processes be confined to a building detached or separated by fire walls from storage or other processing buildings, wherever practical.

The adaptation of assembly lines or conveyor systems to spray finishing processes may present some additional problems of fire hazard segregation. If conveyor systems extend to or from a detached finishing building, a sprinklered non-combustible connecting passageway may be advisable. If conveyor systems go through floors, the floor openings should be surrounded by deep draft curtains on the ceiling beneath and may be provided with automatically controlled high velocity spray nozzles arranged to set up a counter draft. If conveyor systems pierce fire walls it is difficult to arrange automatic fire doors to protect the openings in a practical and reliable manner. In some instances such openings have been provided with non-combustible tunnels extending on each side of fire wall with tunnels protected by specially designed automatic spray or sprinkler systems.

A. 300. Spray Booths. Spray booths may be of a wide variety of shapes and sizes to accommodate the various industrial applications of spray finishing. Without the use of a spray booth, the "spraying area" as defined in Chapter 1, may be of considerable magnitude, with all of the requirements of this standard for a "spraying area" applicable thereto. Spray booth assemblies are no longer listed by the Underwriters' Laboratories, Inc., although many component devices and types of equipment used in connection with spray applications are listed for specific purposes. It is important that only equipment suitable for specific purposes be utilized in connection with the handling and spraying of flammable or combustible liquids.

A. 400. Electrical and Other Sources of Ignition. It is obvious that there should be a total absence of open flames or spark producing equipment in any area where, because of inadequate ventilation, explosive vapor-air mixtures or mists are present. It is equally obvious that no open flames or spark producing equipment should be so located that there will be deposited on them highly combustible spray residues. Because some residues may be ignited at very low temperatures, additional consideration must be given to operating temperatures of equipment subject to residue deposits. Many deposits may be ignited at temperatures produced by incandescent light globes, even of the explosion-proof type, or low pressure steam pipes.

In order to prevent sparks from the accumulation of static electricity all metal parts of spray booths, exhaust ducts and piping systems conveying flammable or combustible liquids should be properly electrically grounded. "Airless" spray painting, employing high fluid pressures can produce static electricity which may cause a spark. Therefore, the nozzle of the "airless" spray gun and any metallic object being sprayed should be properly electrically grounded. This can be done by either using a hose that contains a static electricity conductor, properly grounded, or attaching a properly grounded static wire to the spray gun and properly electrically grounding the object being sprayed.

The area in the vicinity of spraying operations which may contain dangerous quantities of flammable vapors or mists or residue deposits will necessarily vary with design and arrangement of equipment and methods of operation.

For the usual cabinet spray booth it has been generally considered that limited areas not separated by partitions and in the front of a booth may be dangerous. When, however, ventilation is inadequate and spraying is not strictly confined to the inside

of the booth, the dangerous area may extend throughout the entire room.

On the other hand, when adequate, reliable, supervised ventilation is provided and spraying operations strictly confined to the predetermined designated spaces, the hazardous areas may not extend beyond the booth enclosure.

When areas of spraying known to contain hazardous quantities of vapor or mists or residue under normal operation have been determined, the unpartitioned-off areas adjacent to hazardous areas which are safe under normal operating conditions but which may become dangerous due to accident or careless operation should be considered. In these adjacent areas, equipment known to produce sparks or flames under normal operating conditions should not be installed.

Sufficient lighting for operations, both cleaning, and repair should be provided at the time of equipment installation in order to avoid the unjustified use of "temporary" or "emergency" electric lamps connected to ordinary extension cords. A satisfactory and practical method of lighting is the use of $\frac{1}{4}$ inch thick wired or tempered glass panels in the top or sides of spray booths with electrical light fixtures outside the booth, hence not in the direct path of the spray.

Areas adjacent to a spray booth, particularly where paint stocks are located, should be provided with ventilation sufficiently adequate and reliable to prevent the presence of flammable vapors or deposits. It is nevertheless advisable that electric lamps be totally enclosed to prevent the falling of hot particles in any area where there may be freshly painted stock, accidentally spilled flammable or combustible liquids, or readily ignitable refuse or flammable or combustible liquid containers accidentally left open.

Where electric lamps are in areas subject to atmospheres of flammable vapor, the replacing of lamp globes should only be done when electricity is off, otherwise there may be a spark from this source.

The determination of the extent of hazardous areas involved in spray application requires an understanding of the dual hazards of flammable vapors or mists and highly combustible deposits together with intelligent judgment of the objectives, applied to each individual installation.

A. 500. Ventilation. Adequate mechanical ventilation, together with the proper control of deposited residues and proper handling of flammable and combustible liquids, constitute major factors in the fire control of spraying hazards.

In general, if sufficient ventilation is provided to prevent the formation of explosive atmospheres outside of the immediate space of spraying, residues from spraying operations will be directed to and confined to the spaces provided for their control.

Vapors or Mists. The possibility of explosions and fires from the vapors or mists of flammable or combustible liquids should not be underestimated, nor should they be viewed with such concern as to assume they cannot be controlled by proper engineering.

Paints, varnishes, lacquers and other finishing materials may contain volatile flammable solvents and in addition such solvents may be added as "thinners." Such solvents when exposed to the atmosphere give off vapors which mix with the surrounding air and if the concentration of these vapors reaches as much as approximately 1%, an explosion may occur, if at the same time a spark or other source of ignition is present.

Spray applications using only combustible liquids with relatively high flash points, although less likely to produce explosive atmospheres than low flash point flammable liquids, may nevertheless result in mists of enriched atmospheres capable of propagating a flame somewhat similar to combustible solids in dust explosions.

Theoretical considerations may assist in hazard evaluation in some instances. For example, one gallon of the average flammable solvent will occupy approximately 23 cubic feet when evaporated into vapor at average room temperature. Therefore if one gallon of solvent is completely evaporated and thoroughly mixed with the surrounding air of an enclosure, the enclosure must be over 2,300 cubic feet to avoid an explosive mixture if the lower limit of the explosive range of the solvent is 1% in air. In attempting to utilize such theoretical considerations extreme caution should be exercised to prevent erroneous conclusions. For example, vapors from most flammable solvents are heavier than air and small quantities of vapor may form an explosive mixture at low unventilated spaces in the vicinity of or even remote from the point of evaporation before they so mix with air by natural diffusion that the mixture becomes too "lean" to explode. When flammable liquid is sprayed, the rate of evaporation is greatly increased so that the lower explosive limit is quickly reached.

Adequate mechanical ventilation throughout all areas where flammable vapors or mists may be present is essential to prevent the formation of explosive mixtures. The volume of air movement necessary will obviously vary with the arrange-

ment of spraying operations, the amount of spray material used in a given length of time and the rate of evaporation of the particular solvent.

Where spraying is intermittently conducted entirely inside a conventional cabinet spray booth, an average air velocity of approximately 100 linear feet per minute across the open frontal booth area (fan capacity in c.f.m. divided by the frontal area in square feet) should ordinarily be sufficient for vapor removal. Where spraying operations are extensive, or where canopy or down draft spray booths are used, additional ventilation is generally necessary.

A lower rate of exhaust ventilation may be employed in electrostatic spraying, because the volume of coating material being applied is normally less than in other types of spraying, resulting in the volume of solvent vapors being released and overspray being created correspondingly less. Generally, a rate of exhaust of approximately 60 linear feet per minute will maintain the atmosphere well below the explosive limits in electrostatic operations.

When spray booths are provided with adequate ventilation, booths may be so located with respect to finishing room air intake that air in the entire finishing room moves toward spray booth exhausts and "dead air pockets" are eliminated, thus making unnecessary additional mechanical ventilation for the finishing room. With moderately uniform air movement throughout a finishing room, an air change of once every three to five minutes should be sufficient to prevent the formation of explosive vapors under ordinary conditions.

Where large objects such as railway cars are being sprayed, it is frequently necessary to provide multiple air inlets and exhausts in the proximity of all portions of the object, simultaneously producing a rather high air velocity at all points where spray may be applied. In many cases this has been accomplished by strategically locating overhead duct air inlets and exhausting air at the floor level.

Since the air exhausted from spray finishing rooms should not be recirculated, consideration should be given to the heating of incoming air in cold weather. Total heat lost by ventilation should be the same, irrespective of whether air intake is from other portions of the building or filters in through loose fitting doors and windows, or enters through openings designed for the purpose. An efficient and satisfactory method of heating rooms containing several spray booths is to strategically locate air intakes so as to provide a uniform sweep of air throughout the entire room towards exhaust fans and provide each air intake with steam heating coils.

In some heating arrangements, forced "makeup" or "replacement" air directly compensating for the contaminated air exhausted from spray finishing, is used in place of or to augment general area heating and ventilation.

With the many variables which may be encountered in heating and ventilating systems, it is generally advisable to engage the services of a qualified ventilating engineer to obtain a safe and efficient installation.

The features which should be considered include (a) the location of heat sources to conform to Chapter 4; (b) the location of air intakes to prevent recirculating contaminated air and the equipping of air intakes with appropriate screens or filters; (c) automatic temperature and proportioning controls, including an independent excess temperature limit control; (d) an interlocking safety system to automatically provide for safe ignition and to minimize the hazards which might result from failure of proper cycle of operations, proper pressure of fuel supply, ventilation and electrical power; (e) an interlocking of the spray booth exhaust and air replacement system to insure that spray booth exhaust will be running during the operation of air replacement system in order to provide a proper balance of supply and replacement air; and (f) in the case of direct-fired units, the avoidance of concentrations of unburned fuel or products of combustion that would be injurious to personnel if inhaled.

If there are driers or dip tanks in the spray finishing rooms which give off flammable vapors, these should be provided with independent mechanical ventilation.

Spray Residue. When spray finishing any article there is frequently a part of the spray known as overspray that does not deposit directly on the article, resulting in deposits on adjacent surfaces. Many of these residues are highly combustible, igniting at very low temperatures and many will ignite spontaneously, resulting in quick hot fires.

Properly constructed spray booths are designed to confine these residues within the booth and its connecting exhaust duct and are so arranged that should a fire occur in the booth or duct it may be extinguished without spreading to adjacent property and in the extinguishment of the fire other property will not be damaged by water or other extinguishing agents. Spray booth exhaust ducts should not be installed in close proximity to combustible construction or terminate so that a fire in discharged residue can communicate to combustible construction.