

NFPA 385 Standard for Tank Vehicles for Flammable and Combustible Liquids

2000 Edition



National Fire Protection Association, 1 Batterymarch Park, PO Box 9101, Quincy, MA 02269-9101
An International Codes and Standards Organization

Copyright ©
National Fire Protection Association, Inc.
One Batterymarch Park
Quincy, Massachusetts 02269

IMPORTANT NOTICE ABOUT THIS DOCUMENT

NFPA codes, standards, recommended practices, and guides, of which the document contained herein is one, are developed through a consensus standards development process approved by the American National Standards Institute. This process brings together volunteers representing varied viewpoints and interests to achieve consensus on fire and other safety issues. While the NFPA administers the process and establishes rules to promote fairness in the development of consensus, it does not independently test, evaluate, or verify the accuracy of any information or the soundness of any judgments contained in its codes and standards.

The NFPA disclaims liability for any personal injury, property or other damages of any nature whatsoever, whether special, indirect, consequential or compensatory, directly or indirectly resulting from the publication, use of, or reliance on this document. The NFPA also makes no guaranty or warranty as to the accuracy or completeness of any information published herein.

In issuing and making this document available, the NFPA is not undertaking to render professional or other services for or on behalf of any person or entity. Nor is the NFPA undertaking to perform any duty owed by any person or entity to someone else. Anyone using this document should rely on his or her own independent judgment or, as appropriate, seek the advice of a competent professional in determining the exercise of reasonable care in any given circumstances.

The NFPA has no power, nor does it undertake, to police or enforce compliance with the contents of this document. Nor does the NFPA list, certify, test or inspect products, designs, or installations for compliance with this document. Any certification or other statement of compliance with the requirements of this document shall not be attributable to the NFPA and is solely the responsibility of the certifier or maker of the statement.

NOTICES

All questions or other communications relating to this document and all requests for information on NFPA procedures governing its codes and standards development process, including information on the procedures for requesting Formal Interpretations, for proposing Tentative Interim Amendments, and for proposing revisions to NFPA documents during regular revision cycles, should be sent to NFPA headquarters, addressed to the attention of the Secretary, Standards Council, National Fire Protection Association, 1 Batterymarch Park, P.O. Box 9101, Quincy, MA 02269-9101.

Users of this document should be aware that this document may be amended from time to time through the issuance of Tentative Interim Amendments, and that an official NFPA document at any point in time consists of the current edition of the document together with any Tentative Interim Amendments then in effect. In order to determine whether this document is the current edition and whether it has been amended through the issuance of Tentative Interim Amendments, consult appropriate NFPA publications such as the *National Fire Codes*® Subscription Service, visit the NFPA website at www.nfpa.org, or contact the NFPA at the address listed above.

A statement, written or oral, that is not processed in accordance with Section 5 of the Regulations Governing Committee Projects shall not be considered the official position of NFPA or any of its Committees and shall not be considered to be, nor be relied upon as, a Formal Interpretation.

The NFPA does not take any position with respect to the validity of any patent rights asserted in connection with any items which are mentioned in or are the subject of this document, and the NFPA disclaims liability for the infringement of any patent resulting from the use of or reliance on this document. Users of this document are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, is entirely their own responsibility.

Users of this document should consult applicable federal, state, and local laws and regulations. NFPA does not, by the publication of this document, intend to urge action that is not in compliance with applicable laws, and this document may not be construed as doing so.

Licensing Policy

This document is copyrighted by the National Fire Protection Association (NFPA). By making this document available for use and adoption by public authorities and others, the NFPA does not waive any rights in copyright to this document.

1. Adoption by Reference—Public authorities and others are urged to reference this document in laws, ordinances, regulations, administrative orders, or similar instruments. Any deletions, additions, and changes desired by the adopting authority must be noted separately. Those using this method are requested to notify the NFPA (Attention: Secretary, Standards Council) in writing of such use. The term "adoption by reference" means the citing of title and publishing information only.

2. Adoption by Transcription—**A.** Public authorities with lawmaking or rule-making powers only, upon written notice to the NFPA (Attention: Secretary, Standards Council), will be granted a royalty-free license to print and republish this document in whole or in part, with changes and additions, if any, noted separately, in laws, ordinances, regulations, administrative orders, or similar instruments having the force of law, provided that: (1) due notice of NFPA's copyright is contained in each law and in each copy thereof; and (2) that such printing and republication is limited to numbers sufficient to satisfy the jurisdiction's lawmaking or rule-making process. **B.** Once this NFPA Code or Standard has been adopted into law, all printings of this document by public authorities with lawmaking or rule-making powers or any other persons desiring to reproduce this document or its contents as adopted by the jurisdiction in whole or in part, in any form, upon written request to NFPA (Attention: Secretary, Standards Council), will be granted a nonexclusive license to print, republish, and vend this document in whole or in part, with changes and additions, if any, noted separately, provided that due notice of NFPA's copyright is contained in each copy. Such license shall be granted only upon agreement to pay NFPA a royalty. This royalty is required to provide funds for the research and development necessary to continue the work of NFPA and its volunteers in continually updating and revising NFPA standards. Under certain circumstances, public authorities with lawmaking or rule-making powers may apply for and may receive a special royalty where the public interest will be served thereby.

3. Scope of License Grant—The terms and conditions set forth above do not extend to the index of this document.

(For further explanation, see the Policy Concerning the Adoption, Printing, and Publication of NFPA Documents, which is available upon request from the NFPA.)

Copyright © 2000 NFPA, All Rights Reserved

NFPA 385

Standard for

Tank Vehicles for Flammable and Combustible Liquids

2000 Edition

This edition of NFPA 385, *Standard for Tank Vehicles for Flammable and Combustible Liquids*, was prepared by the Technical Committee on Transportation of Flammable Liquids and acted on by the National Fire Protection Association, Inc., at its November Meeting held November 14–17, 1999, in New Orleans, LA. It was issued by the Standards Council on January 14, 2000, with an effective date of February 11, 2000, and supersedes all previous editions.

This edition of NFPA 385 was approved as an American National Standard on February 11, 2000.

Origin and Development of NFPA 385

This standards project was initiated in 1926 and the first edition of NFPA 385 was officially adopted in 1929. NFPA 385 was revised in 1933, 1948, 1953, 1954, 1955, 1957, 1958, 1959, 1960, 1963, 1964, 1966, 1971, 1974, 1979, 1985, and 1990. Editions prior to 1948 had different titles.

This 2000 edition includes the following amendments:

- (1) Revised requirements for warning signs, in 3-4.5
- (2) Revised requirements for fire extinguishers for tank vehicles, in 6-3.1

Technical Committee on Transportation of Flammable Liquids

vacant, Chair

Wade G. DeHate, Hillsborough County Fire Rescue, FL [E]

John R. Eubanks, Jr., Loss Prevention Consultants, Inc.,
MS [SE]

Clifford J. Harvison, Nat'l Tank Truck Carriers Inc., VA
[U]

James R. Kittrell, KSE, Inc., MA [SE]

Donald W. Vierimaa, Truck Trailer Mfrs. Assn., VA [M]

Jerry Miller West, Nashville Fire Dept., TN [E]

Rep. Int'l Assn. of Fire Chiefs

Michael P. Wilson, American Insurance Services Group,
NY [I]

Alternate

John L. Conley, Nat'l Tank Truck Carriers Inc., VA [U]

(Alt. to C. J. Harvison)

Robert P. Benedetti, NFPA Staff Liaison

This list represents the membership at the time the Committee was balloted on the final text of this edition. Since that time, changes in the membership may have occurred. A key to classifications is found at the back of the document.

NOTE: Membership on a committee shall not in and of itself constitute an endorsement of the Association or any document developed by the committee on which the member serves.

Committee Scope: This Committee shall have primary responsibility for documents on safeguarding against the fire and explosion hazards associated with over-the-road transportation of flammable and combustible liquids in tank vehicles and in portable tanks and containers.

Contents

Chapter 1 General Provisions	385- 4	3-4 Burner and Burner Tubes for Asphalt Tank Vehicles	385-11
1-1 Scope	385- 4		
1-2 Definitions	385- 4		
Chapter 2 Tank Vehicle Design	385- 5	Chapter 4 Marking on Tank Vehicles	385-11
2-1 General	385- 5	4-1 Marking	385-11
2-2 Cargo Tanks, Piping, and Connections Designed for Transporting Flammable and Combustible Liquids at Temperatures at or above Their Boiling Points	385- 5	Chapter 5 Auxiliary Equipment	385-11
2-3 Cargo Tanks, Piping, and Connections Designed for Transfer of Flammable and Combustible Liquids at Temperatures below Their Boiling Points	385- 5	5-1 Auxiliary Internal Combustion Engines ...	385-11
2-4 Emergency-Discharge Control	385-10	5-2 Auxiliary Electric Generators and Motors ...	385-12
2-5 Liquids of Viscosities of 45 SUS or More ...	385-10	5-3 Pumps and Hose	385-12
2-6 Tests	385-10	Chapter 6 Operation of Tank Vehicles	385-12
2-7 Separation to Prevent Intermixing	385-10	6-1 General Operating Conditions	385-12
2-8 Lighting	385-10	6-2 Loading and Unloading Tank Vehicles	385-12
Chapter 3 Asphalt Tank Vehicles	385-10	6-3 Fire Extinguishers	385-13
3-1 General	385-10	Chapter 7 Referenced Publications	385-13
3-2 Vents for Cargo Tanks in Asphalt Service ..	385-10	Appendix A Explanatory Material	385-14
3-3 Overflows and Drains for Asphalt Tank Vehicles	385-10	Appendix B Precautions against Ignition by Static Electricity	385-15
		Appendix C Referenced Publications	385-16
		Index	385-18

NFPA 385**Standard for****Tank Vehicles for Flammable
and Combustible Liquids****2000 Edition**

NOTICE: An asterisk (*) following the number or letter designating a paragraph indicates that explanatory material on the paragraph can be found in Appendix A.

Information on referenced publications can be found in Chapter 7 and Appendix C.

Changes other than editorial are indicated by a vertical rule in the margin of the pages on which they appear. These lines are included as an aid to the user in identifying changes from the previous edition.

Chapter 1 General Provisions**1-1 Scope.**

1-1.1* This standard shall apply to tank vehicles to be used for the transportation of asphalt or normally stable flammable and combustible liquids with a flash point below 200°F (93.4°C). It shall provide minimum requirements for the design and construction of cargo tanks and their appurtenances and shall set forth certain matters pertaining to tank vehicles.

1-1.2 The provisions of this standard shall not preclude the use of additional safeguards for tank vehicles used for the transportation of flammable and combustible liquids having characteristics introducing additional factors such as high rates of expansion, instability, corrosiveness, and toxicity.

1-1.3 The provisions of this standard shall also apply to cut-back asphalts that have flash points below 100°F (37.8°C) and to liquids transported at temperatures elevated above their flash points.

1-1.4 The requirements for aircraft fuel servicing tank vehicles shall be in accordance with NFPA 407, *Standard for Aircraft Fuel Servicing*.

1-1.5 A tank vehicle transporting a flammable or combustible liquid in interstate service shall be considered to be in conformity with this standard while it is in interstate service if it meets the requirements of the U.S. Department of Transportation "Hazardous Materials Regulations," Title 49, Code of Federal Regulations, Parts 171–179.

1-2 Definitions.

1-2.1* **Approved.** Acceptable to the authority having jurisdiction.

1-2.2 Baffle. A nonliquidtight transverse partition in a cargo tank.

1-2.3 Bulkhead. A liquidtight transverse closure between compartments of a cargo tank.

1-2.4 Cargo Tank. Any tank having a liquid capacity in excess of 110 gal (418 L) used for carrying flammable and combustible liquids or asphalt and mounted permanently or otherwise upon a tank vehicle. The term *cargo tank* does not apply to any

container used solely for the purpose of supplying fuel for the propulsion of the tank vehicle upon which it is mounted.

1-2.5 Combustible Liquid. A combustible liquid is any liquid that has a closed-cup flash point at or above 100°F (37.8°C), as determined by the test procedures and apparatus set forth in NFPA 30, *Flammable and Combustible Liquids Code*, 1-7.4. Combustible liquids are classified as Class II or Class III as follows: (a) *Class II Liquid* — any liquid that has a flash point at or above 100°F (37.8°C) and below 140°F (60°C); (b) *Class IIIA* — any liquid that has a flash point at or above 140°F (60°C), but below 200°F (93°C); (c) *Class IIIB* — any liquid that has a flash point at or above 200°F (93°C).

1-2.6 Compartment. A liquidtight division in a cargo tank.

1-2.7 Flammable Liquid. Any liquid that has a closed-cup flash point below 100°F (37.8°C), as determined by the test procedures and apparatus set forth NFPA 30, *Flammable and Combustible Liquids Code*, 1-7.4. Flammable liquids shall be classified as Class I as follows: (a) *Class I Liquid* — any liquid that has a closed-cup flash point below 100°F (37.8°C) and a Reid vapor pressure not exceeding 40 psia (2068.6 mm Hg) at 100°F (37.8°C), as determined by ASTM D 323, *Standard Method of Test for Vapor Pressure of Petroleum Products (Reid Method)*. Class I liquids shall be further classified as follows: (1) Class IA liquids — those liquids that have flash points below 73°F (22.8°C) and boiling points below 100°F (37.8°C); (2) Class IB liquids — those liquids that have flash points below 73°F (22.8°C) and boiling points at or above 100°F (37.8°C); (3) Class IC liquids — those liquids that have flash points at or above 73°F (22.8°C), but below 100°F (37.8°C).

1-2.8* Flash Point. The minimum temperature of a liquid at which sufficient vapor is given off to form an ignitable mixture with the air, near the surface of the liquid or within the vessel used.

1-2.9 Head. A liquidtight transverse closure at the end of a cargo tank.

1-2.10 Labeled. Equipment or materials to which has been attached a label, symbol, or other identifying mark of an organization that is acceptable to the authority having jurisdiction and concerned with product evaluation, that maintains periodic inspection of production of labeled equipment or materials, and by whose labeling the manufacturer indicates compliance with appropriate standards or performance in a specified manner.

1-2.11 Liquid. Any material that has a fluidity greater than that of 300 penetration asphalt when tested in accordance with ASTM D 5, *Test for Penetration for Bituminous Materials*.

1-2.12* Listed. Equipment, materials, or services included in a list published by an organization that is acceptable to the authority having jurisdiction and concerned with evaluation of products or services, that maintains periodic inspection of production of listed equipment or materials or periodic evaluation of services, and whose listing states that either the equipment, material, or service meets appropriate designated standards or has been tested and found suitable for a specified purpose.

1-2.13 Tank, Full-Trailer. Any vehicle with or without auxiliary motive power, equipped with a cargo tank mounted thereon or built as an integral part thereof, used for the transportation of flammable and combustible liquids or asphalt, and so constructed that practically all of its weight and load rests on its own wheels.

1-2.14 Tank, Semi-Trailer. Any vehicle with or without auxiliary motive power, equipped with a cargo tank mounted thereon or build as an integral part thereof, used for the transportation of flammable and combustible liquid or asphalt, and so constructed that, when drawn by a tractor by means of a fifth wheel connection, some part of its load and weight rests upon the towing vehicle.

1-2.15 Tank Truck. Any single self-propelled motor vehicle equipped with a cargo tank mounted thereon and used for the transportation of flammable and combustible liquids or asphalt.

1-2.16 Tank Vehicle. Any tank truck, tank full-trailer, or tractor and tank semi-trailer combination.

1-2.17* Vapor Pressure. The pressure, measured in pounds per square inch, absolute (psia), exerted by a liquid, as determined by ASTM D 323, *Standard Method of Test for Vapor Pressure of Petroleum Products (Reid Method)*.

Chapter 2 Tank Vehicle Design

2-1 General.

2-1.1 Design of the tank vehicle shall give engineering consideration to the structural relationship between the cargo tank, the propulsion equipment, and the supporting members, if any, with due regard to the weight and temperature of the cargo, road performance, braking, and required ruggedness. The metal thicknesses specified in this chapter shall be the minimum thicknesses dictated by the structure of the tank itself. These thicknesses shall be permitted to be increased where the tank shell is to be subjected to additional stress. The general design of the cargo tank and vehicle chassis shall be arranged to give the best combination of structural characteristics and vehicle performance. The design of the suspension system shall incorporate features to help assure lateral or tipping stability when turning corners.

2-1.2 Any cargo tank designed for transporting materials at liquid temperatures above ambient temperatures shall have a metal warning plate not subject to corrosion located in a conspicuous place on the right side near the front. Such plate shall be permanently affixed to the tank or tank frame. Upon it shall be marked in characters at least $\frac{1}{2}$ in. (13 mm) high by stamping, embossing, or other means of forming letters into or on the metal of the plate itself at least the following information:

Maximum allowable cargo temperature is ____°F (____°C).

This maximum allowable cargo temperature shall be specified by the manufacturer of the cargo tank.

2-1.3* Cargo tanks used for transporting flammable and combustible liquids at temperatures equal to or above their boiling points shall be constructed in accordance with Section 2-2.

2-1.4 Cargo tanks used for transporting flammable and combustible liquids at a temperature below their boiling points shall be constructed in accordance with the provisions of Section 2-3.

2-1.5* The material used in the construction of the cargo tanks shall be compatible with the chemical characteristics of the flammable and combustible liquid to be transported.

2-1.6 Where a single cargo tank is divided into compartments of different specification construction, each such compartment shall conform to specification requirements concerned and be so identified with a permanent metal plate.

2-2 Cargo Tanks, Piping, and Connections Designed for Transporting Flammable and Combustible Liquids at Temperatures at or above Their Boiling Points. Cargo tanks, piping, and connections designed for transporting flammable and combustible liquids above their boiling points shall be built in accordance with Part 178 of 49 CFR 178, or in accordance with Chapter 6 of NFPA 58, *Liquefied Petroleum Gas Code*.

2-3 Cargo Tanks, Piping, and Connections Designed for Transfer of Flammable and Combustible Liquids at Temperatures below Their Boiling Points.

2-3.1 General. Cargo tanks constructed after the effective date of this standard shall be constructed in accordance with Section 2-3. Continued use of existing cargo tanks constructed in accordance with prior editions of this standard shall be permitted, but new construction according to older standards shall not be permitted.

2-3.2* Material. All sheet and plate material for shell, heads, bulkheads, and baffles for cargo tanks that are not required to be constructed in accordance with the ASME *Boiler and Pressure Vessel Code* shall meet the following minimum applicable requirements.

(a) *Aluminum Alloys (AL).* Only aluminum alloy material suitable for fusion welding and in compliance with ASTM B 209, *Specification for Aluminum and Aluminum-Alloy Sheet and Plate*, shall be used.

All heads, bulkheads, baffles, and ring stiffeners shall be permitted to use 0 temper (annealed) or stronger tempers. All shells shall be made of materials with properties equivalent to H32 or H34 tempers, except that lower ultimate strength tempers shall be permitted to be used if the minimum shell thicknesses in Table 2-3.3.1(b) are increased in inverse proportion to the lesser ultimate strength.

(b) *Steel.* Steel shall meet the requirements of Table 2-3.2(b).

Table 2-3.2(b) Properties of Steel

Property	Mild Steel (MS)	High Strength Low Alloy Steel (HSLA)	Austenitic Stainless Steel (SS)
		Steel (HSLA)	Steel (SS)
Yield strength	25,000 psi	45,000 psi	25,000 psi
Ultimate strength	45,000 psi	60,000 psi	70,000 psi
Elongation, 2-in. samples	20%	25%	30%

2-3.3 Thickness of Sheets, Heads, Bulkheads, and Baffles.

2-3.3.1 The minimum thicknesses of tank material authorized shall be predicated on not exceeding the maximum allowable stress level but in no case shall be less than those indicated in Tables 2-3.3.1(a) and 2-3.3.1(b).

Table 2-3.3.1(a) Minimum Thickness of Heads, Bulkheads, and Baffles. Mild Steel (MS), High Strength Low Alloy Steel (HSLA), Austenitic Stainless Steel (SS), in U.S. Standard Gage; Aluminum Alloy (AL), Expressed in Decimals of an Inch

Thickness	Volume Capacity in Gallons per Inch											
	10 or Less			Over 10 to 14			14 to 18			18 and Over		
	HSLA,			HSLA,			HSLA,			HSLA,		
	MS	SS	AL	MS	SS	AL	MS	SS	AL	MS	SS	AL
Thickness	14	15	0.096	13	14	0.109	12	13	0.130	11	12	0.151

Table 2-3.3.1(b) Minimum Thickness of Shell Sheets. Mild Steel (MS), High Strength Low Alloy Steel (HSLA), Austenitic Stainless Steel (SS), in U.S. Standard Gage; Aluminum Alloy (AL), Expressed in Decimals of an Inch

Maximum Shell Radius	Distance between Bulkheads, Baffles, or Ring Stiffeners	Volume Capacity in Gallons per Inch											
		10 or Less			Over 10 to 14			14 to 18			18 and Over		
		HSLA,			HSLA,			HSLA,			HSLA,		
		MS	SS	AL	MS	SS	AL	MS	SS	AL	MS	SS	AL
Less than 70 in.	36 in. or less	14	16	0.087	14	16	0.087	14	15	0.096	13	14	0.109
	Over 36 in. to 54 in.	14	16	0.087	14	15	0.096	13	14	0.109	12	13	0.130
	54 in. through 60 in.	14	15	0.096	13	14	0.109	12	13	0.130	11	12	0.151
70 in. or more, less than 90 in.	36 in. or less	14	16	0.087	14	15	0.096	13	14	0.109	12	13	0.130
	Over 36 in. to 54 in.	14	15	0.096	13	14	0.109	12	13	0.130	11	12	0.151
	54 in. through 60 in.	13	14	0.109	12	13	0.130	11	12	0.151	10	11	0.173
90 in. or more, less than 125 in.	36 in. or less	14	15	0.096	13	14	0.109	12	13	0.130	11	12	0.151
	Over 36 in. to 54 in.	13	14	0.109	12	13	0.130	11	12	0.151	10	11	0.173
	54 in. through 60 in.	12	13	0.130	11	12	0.151	10	11	0.173	9	10	0.194
125 in. or more	36 in. or less	13	14	0.109	12	13	0.130	11	12	0.151	10	11	0.173
	Over 36 in. to 54 in.	12	13	0.130	11	12	0.151	10	11	0.173	9	10	0.194
	54 in. through 60 in.	11	12	0.151	10	11	0.173	9	10	0.194	8	9	0.216

2-3.3.2 The material thicknesses contained in Tables 2-3.3.1(a) and 2-3.3.1(b) shall be minimums based on a maximum 7.2 lb per gal (0.86 kg/L) product weight. If the tank is designed to haul products weighing more than 7.2 lb per gal (0.86 kg/L), the gallon per inch value used to determine the minimum thickness of heads, bulkheads, baffles, or shell sheets shall be the actual section capacity required in gallons per inch multiplied by the actual product density in pounds per gallon divided by 7.2.

2-3.3.3 Where aluminum is used for cargo tanks intended to transport cargoes at liquid temperatures above 250°F (121.1°C), the minimum thicknesses shall be increased by 1 percent for each 10°F (5.56°C) or portion thereof above 250°F (121.1°C). Where the liquid temperatures are above 500°F (260°C), there shall be an additional 1 percent for each 10°F (5.56°C) or portion thereof above 500°F (260°C). Aluminum shall not be used for cargo tanks transporting cargoes at temperatures above 550°F (288°C).

2-3.4 Structural Integrity.

2-3.4.1 The maximum calculated stress value shall not exceed 20 percent of the minimum ultimate strength of the material as authorized except where ASME pressure vessel design requirements apply (*see Section VIII, ASME Boiler and Pressure Vessel Code*).

2-3.4.2 Cargo tanks shall be provided with additional structural elements as necessary to prevent resulting stresses in excess of those permitted in 2-3.4.1. Consideration shall be given to forces imposed by each of the following loads individually and, where applicable, a vector summation of any combination thereof:

- Dynamic loading under all product load configurations.
- Internal pressure.
- Superimposed loads such as operating equipment, insulation, linings, hose tubes, cabinets, and piping.
- Reactions of supporting lugs and saddles or other supports.
- Effect of temperature gradients resulting from product and ambient temperature extremes. Thermal coefficients of dissimilar materials where used shall be accommodated.

2-3.5 Joints.

2-3.5.1 All joints between tank shells, heads, baffles (or baffle attaching rings), and bulkheads shall be welded in accordance with the requirements contained in this section.

2-3.5.2 All welded aluminum alloy joints shall be made in accordance with recognized good practice, and the efficiency of a joint shall not be less than 85 percent of the properties of the adjacent material. Aluminum alloys shall be joined by an inert gas arc welding process using aluminum-magnesium


type of filler metals that are consistent with the material supplier's recommendations.

2-3.5.3 All welded joints in mild steel (MS), high strength low alloy steel (HSLA), and austenitic stainless steel (SS) shall be made in accordance with recognized good practice, and the efficiency of any joint shall not be less than 85 percent of the mechanical properties of the adjacent metal in the tank.

2-3.5.4 Combinations of mild steel (MS), high strength low alloy (HSLA), and/or austenitic stainless steel (SS) shall be permitted to be used in the construction of a single tank, provided that each material, where used, shall comply with the minimum requirements specified for the material used in the construction of that section of the tank. Whenever stainless steel sheets are used in combination with sheets of other types of steel, joints made by welding shall be formed by the use of stainless steel electrodes or filler rods and the stainless steel electrodes or filler rods used in the welding shall be suitable for use with the grade of stainless steel concerned according to the recommendations of the manufacturer of the stainless steel electrodes or filler rods.

2-3.5.5 Compliance with the requirements contained in 2-3.5.2 or 2-3.5.3 for the welded joints indicated in 2-3.5.1 shall be determined by preparing, from materials representative of those to be used in tanks subject to this specification and by the same technique of fabrication, two test specimens conforming to Figure 2-3.5.5 and testing them to failure in tension. One pair of test specimens shall represent all the tanks to be made of the same combination of materials by the same technique of fabrication, and in the same shop, within six months after the tests on such samples have been completed. The butt welded specimens tested shall be considered qualifying other types or combinations of types of weld using the same filler material and welding process as long as parent metals are of the same types of material.

FIGURE 2-3.5.5 Tensile test specimen.

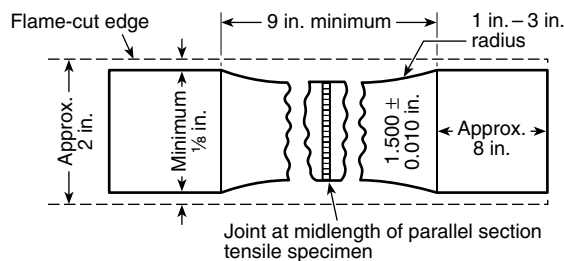

SI units: 1 in. = 25.4 mm

2-3.6 Supports and Anchoring.

2-3.6.1 Cargo tanks with frames not made integral with the tank as by welding shall be provided with restraining devices to eliminate any relative motion between the tank and frame that may result from the stopping, starting, or turning of the vehicle. Such restraining devices shall be readily accessible for inspection and maintenance, except that insulation and jacking shall be permitted to cover the restraining devices.

2-3.6.2 Any cargo tank designed and constructed so that it constitutes in whole or in part the structural member used in lieu of a frame shall be supported in such a manner that the resulting stress levels in the cargo tank do not exceed those specified

in 2-3.4.1. The design calculations of the support elements shall include loadings imposed by stopping, starting, and turning in addition to those imposed as indicated in 2-3.4.2 using 20 percent of the minimum ultimate strength of the support material.

2-3.7 Circumferential Reinforcement.

2-3.7.1 Tanks with shell thicknesses less than $\frac{3}{8}$ in. (9.3 mm) shall, in addition to the reinforcement provided by the tank heads, be circumferentially reinforced with either bulkheads, baffles, or ring stiffeners. It shall be permitted to use any combination of the aforementioned reinforcements in a single cargo tank.

2-3.7.2 Circumferential reinforcement shall be located in such a manner that the maximum unreinforced portion of the shell be as specified in Table 2-3.3.1 (b) and in no case shall be more than 60 in. (1524 mm). Additionally, such circumferential reinforcement shall be located within 1 in. (25.4 mm) of points where discontinuity in longitudinal shell sheet alignment exceeds 10 degrees unless otherwise reinforced with structural members capable of maintaining shell sheet stress levels permitted in 2-3.6.

2-3.7.3 Baffles or baffle attaching rings, where used as reinforcement members, shall be circumferentially welded to the tank shell. The welding shall be not less than 50 percent of the total circumference of the vessel, and the maximum unwelded space on this joint shall not exceed 40 times the shell thickness.

2-3.7.4 Wherever double bulkheads are provided, they shall be separated by an air space. This air space shall be vented and equipped with drainage facilities that shall be kept operative at all times (*see 6-1.7*).

2-3.7.5 Ring stiffeners, where used to comply with this section, shall be continuous around the circumference of the tank shell and shall have a section modulus about the neutral axis of the ring section parallel to the shell at least equal to that determined by the following formulas:

$$\frac{I}{C} (\text{Min}) = 0.00027 WL \text{ (MS, HSLA, \& SS) Steel}$$

$$\frac{I}{C} (\text{Min}) = 0.000467 WL \text{ (AL) Aluminum Alloy}$$

where:

$$\frac{I}{C} = \text{section modulus (in.}^3\text{)}$$

$$W = \text{tank width or diameter (in.)}$$

$$L = \text{ring spacing (in.); i.e., the maximum distance from the midpoint of the unsupported shell on one side of the ring stiffener to the midpoint of the unsupported shell on the opposite side of the ring stiffener}$$

2-3.7.5.1 Where a ring stiffener is welded to the tank shell (with each circumferential weld not less than 50 percent of the total circumference of the vessel and the maximum unwelded space on this joint not exceeding 40 times the shell thickness), a portion of the shell shall be permitted to be considered as part of the ring section for purposes of computing the ring

section modulus. The maximum portion of the shell to be used in these calculations is as shown in Table 2-3.7.5.1.

Table 2-3.7.5.1 Portion of Tank Shell Contributing to Ring Section Modulus

Circumferential Ring Stiffener to Tank Shell Welds	Distance between Parallel		Shell Section Credit
	Circumferential Ring Stiffener to Shell Welds		
1	—		$20t$
2	Less than $20t$		$20t + W$
2	$20t$ or more		$40t$

Note: t = shell thickness; W = distance between parallel circumferential ring stiffener and shell welds.

2-3.7.5.2 If configuration of internal or external ring stiffener encloses an air space, this air space shall be arranged for venting and shall be equipped with drainage facilities that shall be kept operative at all times.

2-3.8 Accident Damage Protection.

2-3.8.1 The design, construction, and installation of any appurtenance to the shell or head of the cargo tank shall be such as to minimize the possibility of appurtenance damage or failure adversely affecting the product retention integrity of the tank.

2-3.8.2 Structural members, such as the suspension subframe, overturn protection, and external rings, when practicable, shall be utilized as sites for attachment of appurtenances and any other accessories to a cargo tank.

2-3.8.3 Except as prescribed in 2-3.8.5, the welding of any appurtenance to a shell or head shall be made by attachment to a mounting pad. The thickness of a mounting pad shall be not less than that of the shell or head to which it is attached. A pad shall extend at least 2 in. (51 mm) in each direction from any point of attachment of an appurtenance. Pads shall have rounded corners or otherwise be shaped in a manner to preclude stress concentrations on the shell or head. The mounting pad shall be attached by a continuous weld around the pad.

2-3.8.4 The appurtenance shall be attached to the mounting pad so there will be no adverse affect upon the product-retention integrity of the tank if any force is applied to the appurtenance, in any direction, except normal to the tank, or within 45 degrees of normal.

2-3.8.5 Skirting structures, conduit clips, brakeline clips, and similar lightweight attachments, which are of a metal thickness, construction, or material appreciably less strong but not more than 72 percent of the thickness of the tank shell or head to which such a device is attached, shall be permitted to be secured directly to the tank shell or head, if each device is designed and installed so that damage to it will not affect the product retention integrity of the tank. These lightweight attachments shall be secured to the tank shell by continuous weld or in such manner as to preclude formation of pockets, which may become sites for incipient corrosion.

2-3.8.6 Every cargo tank shall be provided with a rear bumper to protect the tank and piping in the event of a rear-end collision and to minimize the possibility of any part of the colliding

vehicle striking the tank. The bumper shall be located at least 6 in. (150 mm) to the rear of any vehicle component that is used for loading or unloading purposes or may at any time contain lading while in transit. Dimensionally, the bumper shall conform to 49 *CFR* 393.86. Structurally, the bumper shall be designed to successfully absorb the impact of the vehicle with rated payload (i.e., prevent damage that will cause leakage of product), with a deceleration of 2 “g” using a factor of safety of two based on the ultimate strength of the bumper material. For purposes of these regulations such impact shall be considered uniformly distributed and applied horizontally (parallel to the ground) from any direction at an angle not exceeding 30 degrees to the longitudinal axis of the vehicle.

2-3.8.7 All closures for filling, manhole, or inspection openings shall be protected from damage that will result in leakage of lading in the event of overturning of the vehicle, by being enclosed within the body of the tank or dome attached to the tank or by guards.

2-3.8.7.1 When guards are required, they shall be designed and installed to withstand a vertical load of twice the weight of the loaded tank and a horizontal load in any direction equivalent to one-half the weight of the loaded tank. These design loads shall be permitted to be considered independently. Ultimate strength of the material shall be used as a calculation base. If more than one guard is used, each shall carry its proportionate share of the load. If protection other than guards are considered, the same design load criteria shall be applicable.

2-3.8.7.2 Except for pressure-actuated vents, no overturn protection is required for nonoperating nozzles or fittings less than 5 in. (125 mm) in diameter (which do not contain product while in transit) that project a distance less than the inside diameter of the fitting. This projected distance shall be permitted to be measured either from the shell or the top of an adjacent ring stiffener provided such stiffener is within 30 in. (760 mm) of the center of the nozzle or fitting.

2-3.8.7.3 If the overturn protection is constructed so as to permit accumulation of liquid on the top of the tank, it shall be provided with drainage facilities directed to a safe point of discharge.

2-3.8.8 Piping.

2-3.8.8.1 Product discharge piping shall be provided with protection in such a manner as to reasonably assure against the accidental escape of contents. Such protection shall be permitted to be provided by one of the following.

(a) A shear section shall be located outboard of each emergency valve seat and within 4 in. (100 mm) of the vessel, which will break under strain and leave the emergency valve seat and its attachment to the vessel and the valve head intact and capable of retaining product. The shear section shall be machined in such a manner as to abruptly reduce the wall thickness of the adjacent piping (or valve) material by at least 20 percent; or

(b) Suitable guards shall be capable of successfully absorbing a concentrated horizontal force of at least 8,000 lb (36 kg) applied from any horizontal direction, without damage to the discharge piping that might adversely affect the product retention integrity of the discharge valve.

2-3.8.8.2 The minimum allowable road clearance of any cargo tank component or protection device located between any two

adjacent axles on a vehicle or vehicle combination shall be at least $\frac{1}{2}$ in. (12.7 mm) for each foot separating such axles and in no case less than 12 in. (304.8 mm).

2-3.8.8.3 Hose, piping, and fittings for tanks to be unloaded by pressure shall be designed for bursting pressure of at least 100 psi (689.5 kPa), but in no case less than four times the pressure to which it might be subjected in service by the action of any vehicle-mounted pump or other device (not including safety relief valves). Any coupling used on hose to make connections shall be designed for a working pressure not less than 20 percent in excess of the design pressure of the hose and shall be designed so that there will be no leakage when connected.

2-3.8.8.4 Suitable provisions shall be made in every case to allow for and prevent damage due to expansion, contraction, jarring, and vibration of all pipe. Slip joints shall not be used for this purpose.

2-3.8.8.5 Heater coils, when installed, shall be constructed so that the breaking-off of their external connections will not cause leakage of contents of tank.

2-3.8.8.6 Gaging, loading, and air-inlet devices, including their valves, shall be provided with adequate means for their secure closure, and means shall also be provided for the closing of pipe connection of valves.

2-3.9 Closures for Fill Openings and Manholes. Each compartment in excess of 2,500 gal (9500 L) capacity shall be accessible through a manhole of at least 11 in. \times 15 in. (280 mm \times 380 mm). Manhole and/or fill opening covers shall be designed to provide secure closure of the openings. They shall have structural capability of withstanding internal fluid pressures of 9 psig (gauge pressure of 62 kPa) without permanent deformation. Safety devices to prevent the manhole and/or fill cover from opening fully when internal pressure is present shall be provided.

2-3.10 Vents for Cargo Tanks in Other than Asphalt Service.

2-3.10.1 General. Each cargo tank compartment shall be provided with safety relief devices in accordance with the requirements contained in this section. All of such devices shall communicate with the vapor space. Shutoff valves shall not be installed between the tank opening and any safety device. Safety relief devices shall be mounted, shielded, or drained so as to eliminate the accumulation of water, the freezing of which could impair the operation or discharge capability of the device.

2-3.10.2 Normal Venting. Each cargo tank compartment shall be provided with pressure and vacuum vents having a minimum through area of 0.44 sq in. (284 mm²). All pressure vents shall be set to open at no more than 1 psig (gauge pressure of 6.9 kPa) and all vacuum vents at no more than 6 oz (168 g). Pressure and vacuum vents shall be designed to prevent loss of liquid through the vent in case of vehicle overturn.

2-3.10.3 Loading and Unloading Venting Protection. Where the tank is designed to be loaded or unloaded with the dome cover closed, the vent or vents as described in 2-3.10.2 or additional vents shall limit the vacuum to 1 psi (6.9 kPa) and the tank pressure to 3 psi (20.7 kPa) based on maximum product transfer rate. Unless effective protection against overfilling is made, the pressure vent shall also have sufficient liquid capacity to prevent the pressure from exceeding 3 psi (20.7 kPa) in case of accidental overfilling. This pressure vent may be pres-

sure operated or interlocked with the tank loading device and shall be designed to prevent loss of liquid through the vent under any condition of vehicle rollover attitude.

2-3.11 Emergency Venting for Fire Exposure.

2-3.11.1 Total Capacity. The total emergency venting capacity [cu ft/hr (m³/s)] of each cargo tank compartment shall be not less than that determined from Table 2-3.11.1.

Table 2-3.11.1 Minimum Emergency Vent Capacity in Cubic Feet Free Air/Hour [14.7 psi (101.3 kPa) and 60°F (15.6°C)]

Exposed Area Square Feet	Cubic Feet Free Air per Hour	Exposed Area Square Feet	Cubic Feet Free Air per Hour
20	15,800	275	214,300
30	23,700	300	225,100
40	31,600	350	245,700
50	39,500	400	265,000
60	47,400	450	283,200
70	55,300	500	300,600
80	63,300	550	317,300
90	71,200	600	333,300
100	79,100	650	348,800
120	94,900	700	363,700
140	110,700	750	378,200
160	126,500	800	392,200
180	142,300	850	405,900
200	158,100	900	419,300
225	191,300	950	432,300
250	203,100	1,000	445,000

SI units: 1 ft² = 0.093 m²; 1 ft³ = 0.028 m³.

Note: Interpolate for intermediate sizes.

2-3.11.2 Pressure-Actuated Venting. Each cargo tank compartment shall be equipped with pressure-actuated vent or vents set to open at not less than 3 psi (20.685 kPa) and close when pressure drops to 3 psi (20.7 kPa) or below. The minimum venting capacity for pressure-actuated vents shall be 6,000 cu ft (170 m³) of free air per hour [14.7 psia (101.3 kPa) and 60°F (15.6°C)] from a tank pressure of 5 psi (34.5 kPa). Pressure-actuated devices shall be designed so as to prevent leakage of liquid past the device in case of surge or vehicle upset, except that they shall function in case of pressure riser under any condition of vehicle rollover attitude.

2-3.11.3 Fusible Venting. Where the pressure-actuated venting required by 2-3.11.2 does not provide the total venting capacity required by 2-3.11.1, additional capacity shall be provided by adding fusible venting devices, each having a minimum area of 1.25 sq in. (806 mm²). Such fusible elements shall be located so as not to be in contact with the tank lading under normal operating conditions. The fusible vent or vents shall be actuated by elements that operate at a temperature not exceeding 250°F (121.1°C). The venting capacity of these devices shall be rated at not more than 5 psig (gauge pressure of 34.5 kPa). Where fusible venting devices are used, no less than two such devices shall be used on any cargo tank or tank compartment over 2,500 gal (9500 L) in capacity, and at least

one such device shall be located close to each end of the cargo tank or tank compartment.

2-3.11.4* Flow Testing and Marking of Vents. Each type and size of venting device shall be flow tested in the range specified in the applicable preceding paragraphs. The actual rated flow capacity of the vent in cubic feet of free air per hour at the pressure in psi at which the flow capacity is determined shall be stamped on the device. The fusible vent or vents shall have their flow rating determined at 5 psi (34.5 kPa) differential. These flow tests may be conducted by the manufacturer, if certified by a qualified impartial observer, or may be delegated to an outside agency.

2-4 Emergency-Discharge Control.

2-4.1 Liquids Having Viscosities Less than 45 SUS (Standard Units Saybolt).

2-4.1.1* The outlets of each cargo tank or compartment used for transportation of Class I liquids, and trucks constructed hereafter for transportation of Class II and Class IIIA liquids having a viscosity less than 45 SUS at 100°F (37.8°C), shall be equipped with a self-closing shutoff valve, designed, installed, and operated so as to ensure against the accidental escape of contents. These valves shall be located inside the tank or at a point outside the tank where the line enters or leaves the tank. The valve seat shall be located inside the tank or within the welded flange, its companion flange, nozzle, or coupling and shall be designed so that the valve must be kept closed except during loading and unloading operations.

2-4.1.2 The operating mechanism for the valve shall be provided with a secondary control, remote from the fill openings and discharge connections, for use in the event of accidents or fire during delivery operations.

2-4.1.3 The control mechanism shall be provided with at least one fusible element that becomes effective at a temperature not over 250°F (121°C), permitting the valve to close automatically in case of fire. At least one fusible element shall be in the open where it would be exposed to the heat of a fire under the vehicle.

2-4.1.4 In every case there shall be provided a shear section, located outboard of each emergency valve seat and within 4 in. (101.6 mm) of the vessel, that will break under strain and leave the emergency valve seat and its attachment to the vessel and the valve head intact and capable of retaining product. The shear section shall be machined in such a manner as to abruptly reduce the wall thickness of the adjacent piping (or valve) material by at least 20 percent.

2-5 Liquids of Viscosities of 45 SUS or More. The outlets of each cargo tank used for the transportation of liquids having a viscosity equal to or greater than 45 SUS at 100°F (37.8°C) shall be equipped with one of the following:

- (1) A suitable shutoff valve, located internally, designed so that the valve will remain operable if the external connection is sheared off, or
- (2) A front- or rear-head mounted valve securely reinforced and protected against shock or road hazards.

2-6 Tests.

2-6.1 At the time of manufacture, every cargo tank shall be tested by a minimum air or hydrostatic gauge pressure of 3 psi

(20.7 kPa) or at least equal to the tank design pressure, whichever is greater. If compartmented, each individual compartment shall be similarly tested with adjacent compartments empty and at atmospheric pressure. Air pressure, if used, shall be held for a period of at least 5 minutes during which the entire surface of all joints under pressure shall be coated with a solution of soap and water, heavy oil, or other material suitable for the purpose, foaming or bubbling of which indicates the presence of leaks. Hydrostatic pressure, if used, shall be done by using water or other liquid having a similar viscosity, the temperature of which shall not exceed 100°F (37.8°C) during the test, and applying pressure as prescribed above, gaged at the top of the tank, at which time all joints under pressure shall be inspected for the issuance of liquid to indicate leaks. All closures shall be in place while test by either method is made. During these tests, operative relief devices shall be clamped, plugged, or otherwise rendered inoperative; such clamps, plugs, and similar devices shall be removed immediately after the test is finished.

2-6.2 The test in 2-6.1 shall be repeated following alteration or repairs that involve tank integrity. If there is any leakage, undue distortion, or if failure impends or occurs, the cargo tank shall not be placed in service unless an adequate repair is made. The adequacy of the repair shall be determined by the same method of test.

2-7 Separation to Prevent Intermixing. Tank vehicles designed to transport Class I liquid in one or more compartments and Class II or Class III liquid in other compartment or compartments, or to transport chemically noncompatible liquids, shall be provided with double bulkheads and shall be equipped with separate piping, pumps, meters, and hoses for such classes of product.

2-8 Lighting. Lighting circuits shall have suitable overcurrent protection (fuses or automatic circuit breakers). The wiring shall have sufficient carrying capacity and mechanical strength and shall be secured, insulated, and protected against physical damage, in keeping with recognized good practice.

Chapter 3 Asphalt Tank Vehicles

3-1 General. Cargo tanks shall be free of water or volatile liquids before they are loaded with hot asphalt.

3-2 Vents for Cargo Tanks in Asphalt Service.

3-2.1 Each cargo tank used in asphalt service shall be provided with a vent having an effective opening at least equivalent to a nominal 2-in. (50 mm) pipe.

3-2.2 Each cargo tank for asphalt service shall be provided with a manhole having a free opening of at least 15 in. (381 mm) in diameter designed to relieve internal pressure at between 2 and 3 psig (gauge pressure between 0.095 and 0.143 kPa) or an equivalent relief device.

3-3 Overflows and Drains for Asphalt Tank Vehicles. Overflow protection for asphalt tank vehicles shall be provided in the form of reservoirs or flashing around fill and vent pipes. Overflow and drain pipes shall have thicknesses heavier than the tank shell and shall be designed so that hot asphalt will not spill onto tires, brakes, burner equipment, or vehicle's exhaust system.

3-4 Burner and Burner Tubes for Asphalt Tank Vehicles.

3-4.1 Fuel tanks for the vehicle engine and fuel tanks for the burners on asphalt trucks shall be located remotely from the burner or protected by a noncombustible shield from the burner to prevent flashback.

3-4.2 Burner tubes shall be properly installed and maintained.

3-4.3 The bottom of internal burner tubes shall be located as low in the tank as proper design and functioning will permit.

3-4.4 Instructions for the proper method of operating the burner equipment and the pumping equipment, if so equipped, shall be provided. These instructions shall accompany the vehicle at all times.

3-4.5 A warning sign or label that meets the requirements of ANSI Z535.1, *Safety Color Code*, shall be permanently attached near the burners on any tank vehicle equipped with burners and shall include at least the following information:

WARNING

This burner equipment must not be operated while the vehicle is being loaded or is in transit, or when the burner tubes are not completely submerged.

Chapter 4 Marking on Tank Vehicles

4-1 Marking.

4-1.1 Every tank vehicle used for the transportation of any flammable or combustible liquids, regardless of the quantity being transported, or whether loaded or empty, shall be conspicuously and legibly marked in accordance with the requirements of the 49 *CFR* 171-179, Department of Transportation "Hazardous Materials Regulations."

4-1.2 Manufacturer's Certificate. A certificate signed by a responsible official of the manufacturer of the cargo tank, or from a competent testing agency, certifying that each such cargo tank is designed, constructed, and tested in compliance with this standard shall be procured, and such certificate shall be retained in the files of the carrier during the time that such cargo tank is employed by him, plus one year.

4-1.3 In addition to this certificate, there shall be on every cargo tank (or tank compartment if constructed to different specification) a metal plate not subject to corrosion located on the right side, near the front, in a place readily accessible for inspection. Such plate shall be permanently affixed to the tank by means of soldering, brazing, welding, or other equally suitable means; and upon it shall be marked in characters at least $\frac{3}{16}$ in. (5 mm) high by stamping, embossing, or other means of forming letters into or on the metal of the plate itself at least the information indicated below. The plate shall not be painted so as to obscure the markings thereon.

Vehicle manufacturer
 Manufacturer's serial no.
 Specification identification
 Date of manufacture
 Original test date.....
 Certificate date
 Design pressure.....psi

Test pressurepsi
 Head material.....
 Shell material.....
 Weld material
 Lining material
 Nominal tank capacity by compartment
 (front to rear)U.S. gal
 Maximum product load.....lb
 Loading limits.....gpm and/or psi
 Unloading limits.....gpm and/or psi

4-1.4 If a cargo tank is to be altered physically to meet another specification (or to accommodate a commodity not requiring a specification tank) such combinations shall be indicated beside specification identification.

4-1.5 Where the cargo tank has a metal certification plate for MC 306 specification, the characters "NFPA 385" shall be permitted to be added to the specification identification line on the metal plate.

Chapter 5 Auxiliary Equipment

5-1 Auxiliary Internal Combustion Engines.

5-1.1 Internal combustion engines, other than those providing propulsive power, installed or carried on a tank vehicle transporting Class I liquids for the purpose of providing power for the operation of pumps or other devices, shall meet the requirements in 5-1.2 through 5-1.8.

5-1.2 The engine air intake shall be equipped with an effective flame arrester, or an air cleaner having effective flame arrester characteristics, installed and capable of preventing emission of flame from the intake side of the engine in event of backfiring.

5-1.3 The fuel system shall be located or constructed so as to minimize the fire hazard. Where the fuel tank is located above or immediately adjacent to the engine, suitable shielding shall be provided to prevent spillage during the filling operation, or leakage from the tank or fuel system, from coming in contact with the engine or any parts of the ignition and exhaust systems. All parts of the fuel system shall be constructed and installed in a proficient manner.

5-1.4 Pumps and other appurtenances shall be so located in relation to the engine that spillage or leakage from such parts shall be prevented from coming in contact with the engine or any parts of the ignition and exhaust system, or adequate shielding shall be provided to attain the same purpose. The engine cooling fan shall be positioned, rotated, or shielded so as to minimize the possibility of drawing flammable vapors toward the engine.

5-1.5 Where the engine is located in a position that spillage from the cargo tank or its appurtenances or from side racks might constitute a hazard, shielding shall be provided to prevent such spillage from contacting the engine or engine exhaust system and for draining such spillage away from the vicinity of the engine.

5-1.6 Where the engine is carried within an enclosed space, provision shall be made for adequate air circulation at all times to prevent accumulation of explosive vapors and to avoid overheating.

5-1.7 The exhaust system shall be constructed and installed and free from leaks. The exhaust line and muffler shall have adequate clearance from combustible materials, and the exhaust gases shall be discharged at a location that shall not constitute a hazard. Where engines are carried as in 5-1.6, the exhaust gases shall be discharged outside of each such enclosed space.

5-1.8 The ignition wiring shall be installed with firm connections, and spark plug and all other terminals shall be insulated to prevent sparking in event of contact with conductive materials. The ignition switch shall be of the enclosed type.

5-2 Auxiliary Electric Generators and Motors.

5-2.1 Electrical equipment installed or carried upon a tank vehicle transporting Class I liquids for the operation of pumps or other devices used for the handling of product, and operating product handling accessories shall meet the requirements of 5-2.2 through 5-2.6.

5-2.2 Generators that are mounted on the engine providing propulsive power for the vehicle or an auxiliary engine, or located in the immediate vicinity of such engine or its exhaust system, shall be permitted to have general purpose enclosure. Generators located elsewhere shall be provided with explosionproof enclosures.

5-2.3 Motors having sparking contacts shall be provided with explosionproof enclosures.

5-2.4 Wiring shall be adequate for maximum loads to be carried and shall be installed so as to be protected from physical damage and contact with possible product spill either by location or by being enclosed in metal conduit or other oil-resistant protective covering. Junction boxes shall be sealed.

5-2.5 Switches, overload protection devices, and other sparking equipment shall be located and enclosed as provided for generators in 5-2.2.

5-2.6 Where the generator or motor is located within an enclosed space, provision shall be made for adequate air circulation to prevent overheating and possible accumulation of explosive vapor.

5-3 Pumps and Hose.

5-3.1 Where a pump is used to deliver products, automatic means shall be provided to prevent pressure in excess of the design working pressures of the accessories, piping, and hose.

5-3.2 Each length of hose used for delivery of product by pump shall be marked to indicate the manufacturer's recommended working pressure.

5-3.3 All pressure hoses and couplings shall be inspected at intervals appropriate to the service. With the hose extended, pressure shall be applied to the hose and couplings to the maximum operating pressure. Any hose showing material deteriorations, signs of leakage, or weakness in its carcass or at the couplings shall be withdrawn from service and repaired or discarded.

Chapter 6 Operation of Tank Vehicles

6-1 General Operating Conditions.

6-1.1 Drivers shall be thoroughly trained in the proper method of operating tank vehicles and in the proper procedures for loading and unloading tank vehicles. Tank vehicles shall not be operated unless they are in proper repair, devoid of accumulation of grease, oil, or other flammables, and free of leaks.

6-1.2 Dome covers shall be closed and latched while the tank vehicle is in transit.

6-1.3 No tank vehicle shall be operated with a cargo temperature above the maximum allowable cargo temperature specified on the warning sign required by 2-1.2.

6-1.4 No material shall be loaded into or transported in a cargo tank at a temperature above its ignition temperature, unless properly safeguarded in a manner approved by the authority having jurisdiction.

6-1.5 Flammable and combustible liquids that are loaded at or above their boiling points or may reach their boiling point temperature during transit, shall be loaded only into cargo tanks constructed in accordance with Section 2-2.

6-1.6* Flammable and combustible liquids shall be loaded only into cargo tanks whose material used in construction shall be compatible with the chemical characteristics of the liquid. The flammable and combustible liquid being loaded shall also be chemically compatible with the liquid hauled on the previous load unless the cargo tank has been cleaned.

6-1.7 Class II or Class III liquids shall not be loaded into a compartment adjacent to Class I liquids unless double bulkheads are provided, nor shall chemically noncompatible chemicals be loaded into adjacent compartments unless separated by double bulkheads.

6-1.8* To prevent a hazard from a change in flash point of liquids, no cargo tank, or any compartment thereof, that has been utilized for Class I liquid shall be loaded with Class II or Class III liquid until such tank or compartment and all piping, pumps, meters, and hose connected thereto have been completely drained. A tank, compartment, piping, pump, meter, or hose that does not drain completely shall be flushed at the loading point with a quantity of Class II or Class III liquid equal to twice the capacity of piping, pump, meter, and hose, to clear any residue of Class I liquid from the system.

6-1.9 No repairs shall be made to any tank vehicle unless the repairs can be made without hazard, nor shall any loaded motor vehicle be repaired in a closed garage.

6-1.10 No cargo tank shall be repaired by any method employing a flame, arc, or other source of ignition, unless the tank is maintained gas free or otherwise made safe in an approved manner.

6-2 Loading and Unloading Tank Vehicles.

6-2.1 Loading and unloading of tank vehicles shall be done only in approved locations.

6-2.2 The driver, operator, or attendant of any tank vehicle shall not remain in the vehicle but shall not leave the vehicle unattended during the loading or unloading process. Delivery hose, when attached to a tank vehicle, shall be considered to be a part of the tank vehicle.

6-2.3 When transferring Class I liquids, motors of tank vehicles or motors of auxiliary or portable pumps shall be shut down during making and breaking hose connections. Where loading or unloading is done without requiring the use of the motor of the tank vehicle, the motor shall be shut down throughout the transfer operations of Class I liquids.

6-2.4 Where portable pumps are used for transferring Class I liquids, the portable pumps shall comply with the applicable provisions of Section 5-1 or 5-2.

6-2.5 No cargo tank or compartment thereof used for the transportation of any flammable or combustible liquid or asphalt shall be loaded liquid full. Sufficient space (outage) shall be provided in every case to prevent leakage from such tank or compartment by expansion of the contents due to rise in temperature in transit and in no case less than 1 percent.

6-2.6 Delivery of Class I liquids to underground tanks of more than 1,000 gal (3800 L) capacity shall be made by means of tight connections between the hose and the fill pipe. In all cases where underground tanks are equipped with any type of vapor recovery system, all connections required to be made for the safe and proper functioning of the particular vapor recovery process shall be made. Such connections shall be designed to prevent release of vapors at grade level and shall remain connected throughout the loading or unloading process.

6-2.7 Where a cargo tank is filled through bottom loading, a positive means shall be provided for loading a predetermined quantity of liquid, and an automatic secondary shutoff control shall be installed in each compartment to prevent overflow.

6-2.8 The secondary shutoff control system shall be labeled as to manufacturer and type. Any electrical system shall be labeled as to manufacturer and type. Any electrical system used for secondary shutoff shall be in accordance with NFPA 70, *National Electrical Code*®.

6-2.9 Where bottom loading vehicles are equipped for vapor recovery and vapor recovery is not required, the tank vapor system shall be open to the atmosphere to prevent pressurization of the tank and the vapor system.

6-2.10 Where a dry disconnect vapor recovery adapter is used, provisions shall be made to assure the vapor recovery system is fully vented before unloading to prevent collapse of the tank. This requirement shall apply to both bottom and top loading.

6-2.11 Where bottom loading a tank equipped with a vapor recovery system, the vapor recovery connection shall be used to conduct vapor away from the loading area using the terminal vapor recovery system, discharge standpipe, or by opening the tank fill openings (manholes).

6-2.12 Where a cargo tank is filled through a top opening, the cargo tank shall be bonded to the fill stem or to some part of the rack structure that is electrically interconnected with the fill stem piping.

Exception No. 1: Loading asphalt, crude oil, or a product containing substantial proportions of crude residuum.

Exception No. 2: Tank vehicles used exclusively for transporting Class II and Class III liquids when loaded at locations where no Class I liquids are handled.

6-2.13* The bond-wire connection shall be made prior to opening the dome covers. It shall be maintained in place during the entire filling operation and the dome covers shall be

securely closed before the bond wire is disconnected from the cargo tank.

6-2.14 No external bond-wire connection or bond-wire integral with a hose shall be required for the unloading of flammable and combustible liquids into underground tanks nor when a tank vehicle is loaded or unloaded through tight connections such as to an aboveground tank or through bottom connections.

6-2.15 Smoking on or about any tank vehicle while loading or unloading any flammable or combustible liquid shall be forbidden. Extreme care shall be taken in the loading or unloading of any flammable liquid into or from any cargo tank to keep fire away and to prevent persons in the vicinity from smoking, lighting matches, or carrying any flame or lighted cigar, pipe, or cigarette.

6-2.16 No flammable or combustible liquid shall be transferred to or from any tank vehicle unless the parking brake is securely set and all other reasonable precautions have been taken to prevent motion of the vehicle.

6-3 Fire Extinguishers.

6-3.1 Each tank vehicle shall be provided with one portable fire extinguisher that has a minimum rating of 4A, 40-B,C or with more than one portable fire extinguisher, each having a rating of 2A, 20-B,C. Ratings shall be in accordance with NFPA 10, *Standard for Portable Fire Extinguishers*.

6-3.2 Fire extinguishers shall be kept in good operating condition at all times, and they shall be located in an accessible place on each tank vehicle. Extinguishers shall be maintained in accordance with NFPA 10, *Standard for Portable Fire Extinguishers*.

Chapter 7 Referenced Publications

7-1 The following documents or portions thereof are referenced within this standard as mandatory requirements and shall be considered part of the requirements of this standard. The edition indicated for each referenced mandatory document is the current edition as of the date of the NFPA issuance of this standard. Some of these mandatory documents might also be referenced in this standard for specific informational purposes and, therefore, are also listed in Appendix C.

7-1.1 NFPA Publications. National Fire Protection Association, 1 Batterymarch Park, P.O. Box 9101, Quincy, MA 02269-9101.

NFPA 10, *Standard for Portable Fire Extinguishers*, 1998 edition.

NFPA 30, *Flammable and Combustible Liquids Code*, 1996 edition.

NFPA 58, *Liquefied Petroleum Gas Code*, 1998 edition.

NFPA 70, *National Electrical Code*®, 1999 edition.

NFPA 407, *Standard for Aircraft Fuel Servicing*, 1996 edition.

7-1.2 ANSI Publication. American National Standards Institute, Inc., 11 West 42nd Street, 13th floor, New York, NY 10036.

ANSI Z535.1, *Safety Color Code*, 1998.

7-1.3 ASTM Publications. American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

ASTM B 209, *Specification for Aluminum and Aluminum-Alloy Sheet and Plate*, 1996 edition.

ASTM D 5, *Test for Penetration for Bituminous Materials*, 1997 edition.

ASTM D 323, *Standard Method of Test for Vapor Pressure of Petroleum Products (Reid Method)*, 1999 edition.

7-1.4 ASME Publication. American Society of Mechanical Engineers, Three Park Avenue, New York, NY 10016-5990.

ASME Boiler and Pressure Vessel Code.

7-1.5 U.S. Government Publications. U.S. Government Printing Office, Washington, DC 20402.

Code of Federal Regulations, Title 49, Transportation, Parts 171-179.

Appendix A Explanatory Material

Appendix A is not a part of the requirements of this NFPA document but is included for informational purposes only. This appendix contains explanatory material, numbered to correspond with the applicable text paragraphs.

A-1-1.1 Normally stable materials are those having the relative capacity to resist those changes in their chemical composition that would produce violent reactions or detonations despite exposure to air, water, or heat, including the normal range of conditions encountered in handling, storage, or transportation. Unstable (reactive) flammable and combustible liquids are liquids that in the pure state or as commercially produced or transported will vigorously polymerize, decompose, condense, or become self-reactive under conditions of shock, pressure, or temperature.

A-1-2.1 Approved. The National Fire Protection Association does not approve, inspect, or certify any installations, procedures, equipment, or materials; nor does it approve or evaluate testing laboratories. In determining the acceptability of installations, procedures, equipment, or materials, the authority having jurisdiction may base acceptance on compliance with NFPA or other appropriate standards. In the absence of such standards, said authority may require evidence of proper installation, procedure, or use. The authority having jurisdiction may also refer to the listings or labeling practices of an organization that is concerned with product evaluations and is thus in a position to determine compliance with appropriate standards for the current production of listed items.

A-1-2.8 Flash Point. Flash point is a direct measure of a liquid's volatility, its tendency to vaporize. The lower the flash point, the greater the volatility and the greater the risk of fire. Flash point is determined using one of several different test procedures and apparatus that are specified in NFPA 30, *Flammable and Combustible Liquids Code*, 1-7.4.

A liquid that has a flash point at or below ambient temperature is easy to ignite and will burn quickly. On ignition, the spread of flame over the surface of such a liquid will be rapid, because it is not necessary for the fire to expend energy heating the liquid to generate more vapor. Gasoline is a familiar example. A liquid with a flash point above ambient temperature presents less risk because it must be heated to generate enough vapor to become ignitable; it is more difficult to ignite and presents less potential for the generation and spread of vapor. A common example is home heating oil (Fuel Oil No. 2). Home

heating oil must be atomized to a fine mist in order for it to be easily ignited.

Certain solutions of liquids in water exhibit a flash point using the standard closed-cup test procedures but will not burn and might even extinguish a fire. To assist identifying such solutions, the following standards are helpful: ASTM D 4207, *Standard Test Method for Sustained Burning of Low Viscosity Liquid Mixtures by the Wick Test*, and ASTM D 4206, *Standard Test Method for Sustained Burning of Liquid Mixtures by the Setaflash Tester (Open Cup)*. Liquid mixtures that do not sustain combustion for a specified time at a specified temperature are considered to be noncombustible. These tests provide additional data for determining proper storage and handling of such mixtures. In a confined space, such mixtures might still create an ignitable vapor-air mixture, depending on the amount of flammable liquid in the mixture and the quantity of the spill.

Related to the flash point is the "fire point." The fire point of a liquid is the temperature at which ignition of vapors will result in continued burning. As the term "flash point" suggests, the vapors generated at that temperature will flash, but will not necessarily continue to burn. The difference between flash point and fire point has some significance when conducting flash point tests [see NFPA 30, *Flammable and Combustible Liquids Code* 4-1.1.2 references to ASTM D 92, *Fire Point*, and CFR 49 (U.S. Department of Transportation Hazardous Materials Regulations), *Method of Testing for Sustained Combustibility*.] However, a closed-cup flash point is used to classify the liquid and characterize its hazard.

For more information, see ASTM E 502, *Standard Test Method for Selection and Use of ASTM Standards for the Determination of Flash Point of Chemicals by Closed Cup Methods* and the *ASTM Manual on Flash Point Standards and Their Use*.

A-1-2.12 Listed. The means for identifying listed equipment may vary for each organization concerned with product evaluation; some organizations do not recognize equipment as listed unless it is also labeled. The authority having jurisdiction should utilize the system employed by the listing organization to identify a listed product.

A-1-2.17 Vapor Pressure. Vapor pressure is a measure of the pressure that the liquid exerts against the atmosphere above it. Just as the atmosphere exerts pressure on the surface of the liquid, the liquid pushes back. Vapor pressure is normally less than atmospheric pressure and is a measure of the liquid's tendency to evaporate, to move from the liquid to the gaseous state. This tendency is also referred to as volatility, thus the use of the term *volatile* to describe liquids that evaporate very easily. The higher the vapor pressure, the greater the rate of evaporation and the lower the boiling point. Simply put, this means more vapors and increased fire risk.

A-2-1.3 Possible temperature rise during transfer as well as the loading temperature and altitude must be considered when determining if the flammable and combustible liquid will be transported at or above its boiling point. Where an accurate boiling point is unavailable for the material in question, or for mixtures that do not have a constant boiling point, the 10 percent point of a distillation performed in accordance with ASTM D 86, *Standard Method of Test for Distillation of Petroleum Products*, may be used as the boiling point of the liquid.

A-2-1.5 In case of doubt, the supplier or producer of the flammable and combustible liquid or other competent authority should be consulted as to the suitability of the material of construction to be used.

A-2-3.2 Minimum requirements for materials listed below are duplicated from 49 *CFR* 178.341, in effect as of January 1, 1974.

A-2-3.11.4 Information on suitable methods for conducting the flow tests is provided in *API Standard 2000*.

A-2-4.1.1 The 45-second viscosity limit is included for the purposes of requiring internal valves when transporting free-flowing distillate oils, such as kerosene, diesel oil, and domestic heating oil, and of excluding this requirement when transporting viscous oils such as residual fuel oil, bunker fuel oil, and asphalt products that can congeal and cause malfunctioning of the valve.

A-6-1.6 In case of doubt, the supplier or producer of the flammable or combustible liquid or other competent authority should be consulted.

A-6-1.8 To reduce the danger of static ignition when changing from Class I to Class II or Class III (switch loading), other precautions may be necessary. (*See Appendix B for further information.*)

A-6-2.13 Bond wires can be insulated or noninsulated. A noninsulated wire permits ready visual inspection for continuity of bond. Insulated types should be electrically tested or inspected periodically for continuity of the entire bond circuit including clamps and connectors.

Appendix B Precautions against Ignition by Static Electricity

This appendix is not a part of the requirements of this NFPA document but is included for informational purposes only.

B-1 General Information.

B-1.1 Chapter 6 of this standard includes requirements directed at preventing the occurrence of static-caused fires or explosions in the operation of tank vehicles. This appendix provides background information concerning the generation, accumulation, and release of static charges (sparks) in such operations and explains the reasons for the required precautions.

B-1.2 For a more detailed discussion of static electricity and methods for its control for the purpose of eliminating or mitigating its fire hazard, see NFPA 77, *Recommended Practice on Static Electricity*.

B-2 Static Electricity.

B-2.1 Generation. Static electricity almost always results from the intimate contact and subsequent separation of two substances, most often dissimilar substances. While the most widely recognized manifestations involve the separation of solids, liquid-solid separation is also a generating means and the one most important in the operation of tank vehicles.

The flow of any fluid (even water) past a surface, such as the wall of a pipe, results in the separation of electric charge. If the fluid is a conductor of electricity, such as water, the separated charges quickly reunite, and there is no conspicuous evidence that charge separation had ever occurred. But if the liquid is a poor conductor, as are many oils, this recombination may be hindered, and a persistent charge may accumulate.

If a metallic vessel insulated from its surroundings is filled in this manner, the charge carried by the liquid can be communicated to the vessel. In other words, the vessel can become “charged,” or assume an electrical potential different from that of its surroundings. If a wire connected to some other body or to earth is brought close to the vessel being filled, this charge can be released in the form of a spark.

In a somewhat different but analogous manner, a charge may accumulate on the surface of the fluid in an area remote from the vessel walls, even though the vessel is itself “grounded,” and this surface charge can, under certain circumstances, be released in the form of a spark.

Both of these means of spark production are important and will be dealt with separately.

B-2.2 Charging Tendency. The words *charging tendency* or *static-generating ability* have come into use in describing the capability of a fluid to generate and hold a dangerous charge of static electricity. In the following, the word *oil* will be used to typify such a fluid irrespective of origin. Actually, such fluids range from pure chemicals to complex mixtures such as kerosene and other products of petroleum; some have a charging tendency and some do not.

The static-generating capability of any oil is influenced in a complex manner by the presence of ionizable components and the oil’s electrical resistivity, as discussed in detail in NFPA 77, *Recommended Practice on Static Electricity*. Product name is not a reliable means of distinguishing one oil from another as regards static-generating capability. Hence, the precautions listed in this document are based on the concept that all oils are suspect, with the important exception that crude oil and all materials containing more than a very small amount of the heavy residuum of crude oil distillation are known to be non-accumulators because of their relatively high conductivity. Alcohols or other chemicals containing appreciable amounts of dissolved water and certain chemicals with low resistivities fall into the same category.

Since all oils under handling conditions have at least some small conductivity, such that a charge will eventually leak off, it obviously follows that the persistence of a charge must represent an equilibrium between the generating rate and the leakage rate. Generating rate depends on the rate of motion of the fluid.

In some cases the linear velocity of flow in a pipe is considered important from the standpoint of static generation. A special case involves pumping oil through filters, where the intimate contact between the oil and the filter element is known to produce a high degree of electrification.

In either case if, after leaving the place of high generation, the oil reaches a place involving a lesser degree of turbulence, some of the charge will leak away, or “relax,” and “relaxation time” has become a consideration in many instances.

B-3 Ignition Hazard. The development of electrical charges does not of itself constitute a fire or explosion hazard. There must also be present a means of accumulating or storing the charge and some place (a spark gap) where the stored energy can be released in the form of a spark in the presence of a mixture that is ignitable. The hazard does not exist if any one of these three requirements — generation means, spark gap, or ignitable mixture — is absent. It follows naturally that no precautions need be taken if one of these three requirements is known to be absent, and that where this is not assured, corrective measures will be directed toward eliminating one of them.