

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
B

AS25274

FEDERAL SUPPLY CLASS
5999

RATIONALE

LIMIT SCOPE CHANGE TO ADDRESS A TYPO ON THE -2 WIRE SIZE SPECIFIED IN TABLE 1.

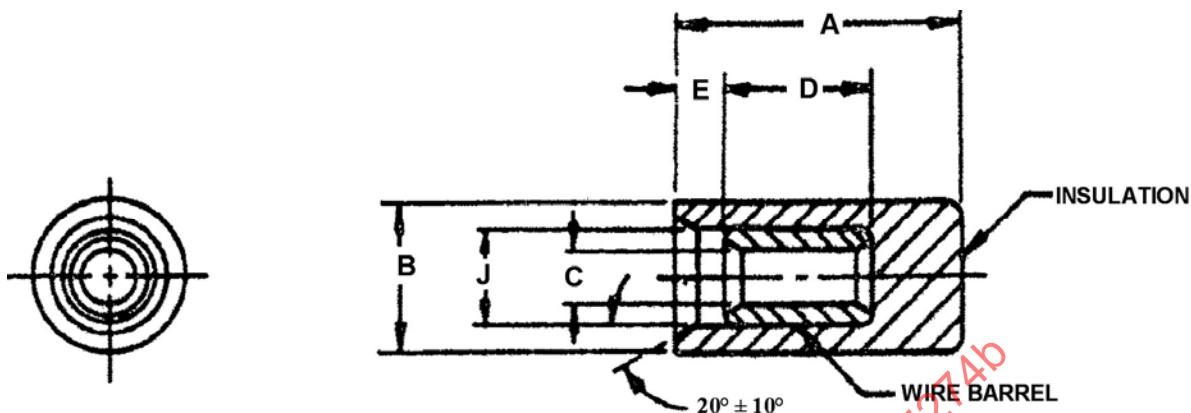



FIGURE 1 – AS25274 CONFIGURATION

TABLE 1 – DIMENSIONS AND PERFORMANCE REQUIREMENTS

DASH NO.	WIRE SIZE	A MAX	B MAX	C		D MAX	E MIN	J MAX	COLOR CODE	MIN TENSILE VALUES AND AXIAL LOAD (LB)	M22520 CRIMP TOOLS M22520/5-01 OR M22520/10-01
				MAX	MIN						
-1	26-24	.480	.215	.035	.027	.305	.082	.145	YELLOW	5.0	M22520/5-01
-2	22-18		.215	.073	.050			.145	RED	15.0	(M22520/5-100) M22520/10-01 (M22520/10-101) M22520/40
-3	16-14		.245	.095	.080			.170	BLUE	25.0	M22520/10-01 (M22520/10-101) M22520/40
-4	12-10		.315	.140	.129	.345		.229	YELLOW	35.0	M22520/10-01 (M22520/10-100) M22520/41

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS25274B>

THIRD ANGLE PROJECTION



CUSTODIAN: AE-8/AE-8C2

PROCUREMENT SPECIFICATION: AS7928



AEROSPACE STANDARD

CAP, ELECTRICAL (WIRE END, CRIMP STYLE, TYPE II, CLASS 1) FOR 105 °C TOTAL CONDUCTOR TEMPERATURE

AS25274
SHEET 1 OF 2

REV.
B