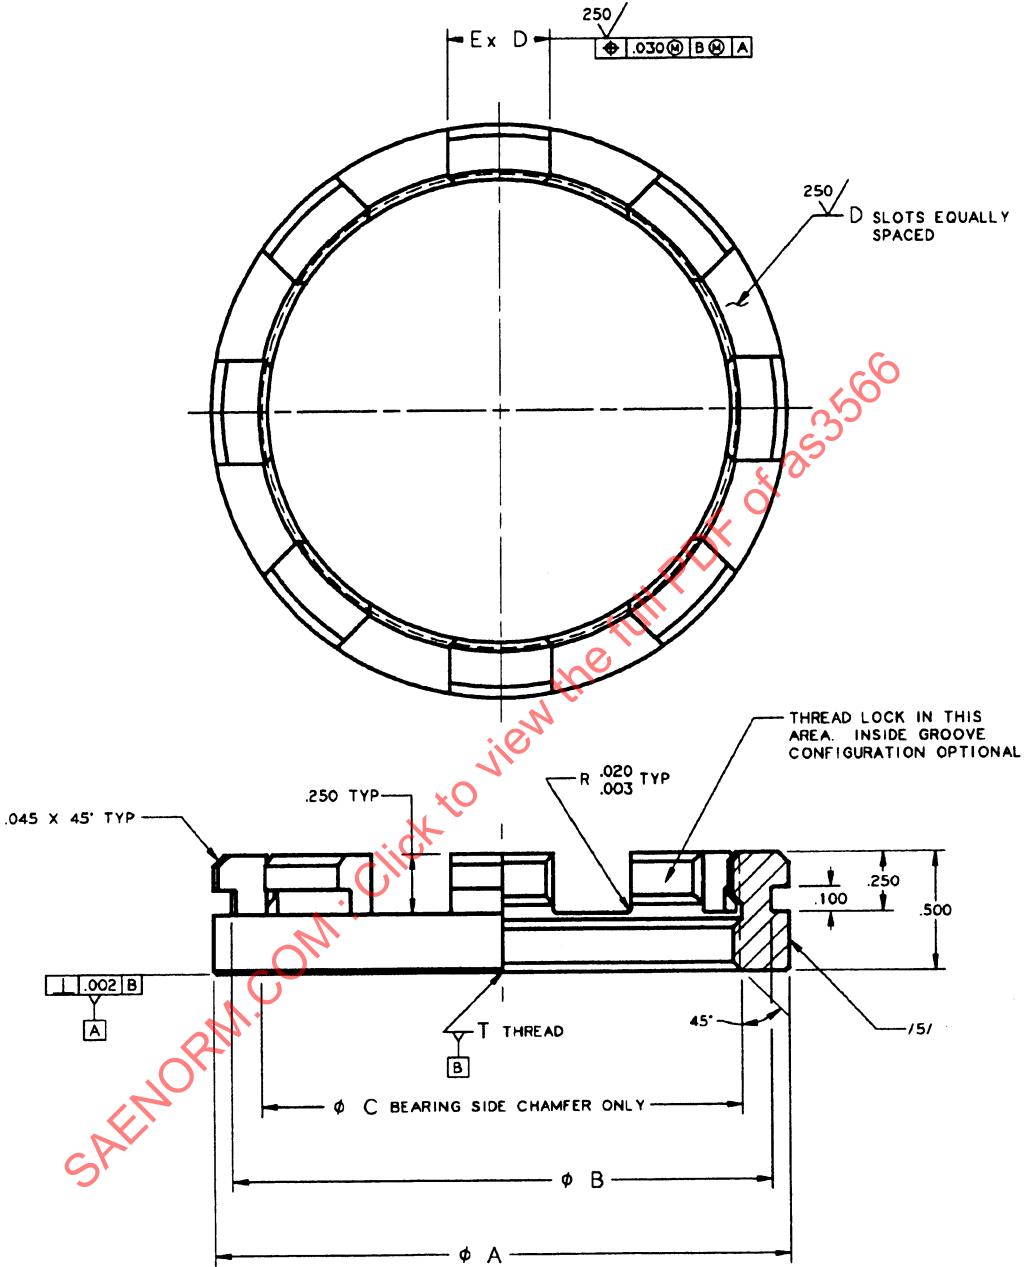



AS3566	<p style="text-align: center;">RATIONALE</p> <p style="text-align: center;">THIS DOCUMENT HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE 5-YEAR REVIEW POLICY.</p>	FEDERAL SUPPLY CLASS 5310
	 <p style="text-align: center;">FIGURE 1</p>	SAENORM.COM : Click to view the full PDF of as3566
<p>SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."</p> <p>SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.</p>	<p style="text-align: right;">ISSUED 1997-10 REAFFIRMED 2006-05</p>	<div style="border: 1px solid black; padding: 5px; display: inline-block;"> THIRD ANGLE PROJECTION  </div>
<p>PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS</p> <p>SAE Aerospace An SAE International Group</p>	<p>AEROSPACE STANDARD</p> <p>NUT, SELF-LOCKING, CASTELLATED, PREVAILING TORQUE, UNJ 16 PITCH THREAD FORM</p>	<p>AS3566</p> <p>SHEET 1 OF 2</p>

Copyright 2006 SAE International
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.