



<b>REV.</b> <b>A</b>	<p style="text-align: center;">RATIONALE</p> <p>THIS DOCUMENT HAS BEEN DETERMINED TO CONTAIN BASIC AND STABLE TECHNOLOGY WHICH IS NOT DYNAMIC IN NATURE.</p>		<p>FEDERAL SUPPLY CLASS 5935</p>
<b>SAE AS39029/3</b>	<p>DESIGN AUTHORITIES MAY DETERMINE THAT THIS DOCUMENT IS NO LONGER TO BE USED FOR NEW DESIGN. THIS DETERMINATION SHOULD BE MADE BY EACH DESIGN AUTHORITY.</p>		
<p style="text-align: center;">STABILIZED NOTICE</p>			
<p>THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY THE AE-8C1 COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.</p>			
<div style="position: relative; height: 600px;"> <div style="position: absolute; top: 50%; left: 50%; transform: translate(-50%, -50%) rotate(-45deg); color: red; font-size: 2em; opacity: 0.5;">             SAENORM.COM : Click to view the full PDF of as39029_3a           </div> </div>			
<div style="border: 1px solid black; padding: 5px;"> <p><b>SAE values your input. To provide feedback on this Technical Report, please visit</b>  <a href="http://www.sae.org/technical/standards/AS39029/3A">http://www.sae.org/technical/standards/AS39029/3A</a></p> </div>		<p style="text-align: center;">THIRD ANGLE PROJECTION</p> 	
<p>CUSTODIAN: AE-8C1</p>			
	<p style="text-align: center;"><b>AEROSPACE STANDARD</b></p> <p>CONTACTS, ELECTRICAL CONNECTOR, SOCKET, CRIMP REMOVABLE, (FOR MIL-C-81659 SERIES 1 CONNECTORS)</p>		<p><b>SAE AS39029/3</b> SHEET 1 OF 5</p> <p style="text-align: right;"><b>REV.</b> <b>A</b></p>

# NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MIL-C-39029/3B AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MIL-C-39029/3B. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.


THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as39029\_3a

 <small>An SAE International Group</small>	<b>AEROSPACE STANDARD</b>	<b>SAE AS39029/3</b> SHEET 2 OF 5	<b>REV.</b> <b>A</b>
	CONTACTS, ELECTRICAL CONNECTOR, SOCKET, CRIMP REMOVABLE, (FOR MIL-C-81659 SERIES 1 CONNECTORS)		

THE COMPLETE REQUIREMENTS FOR PROCURING THE CONTACTS DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF SPECIFICATION MIL-C-39029.

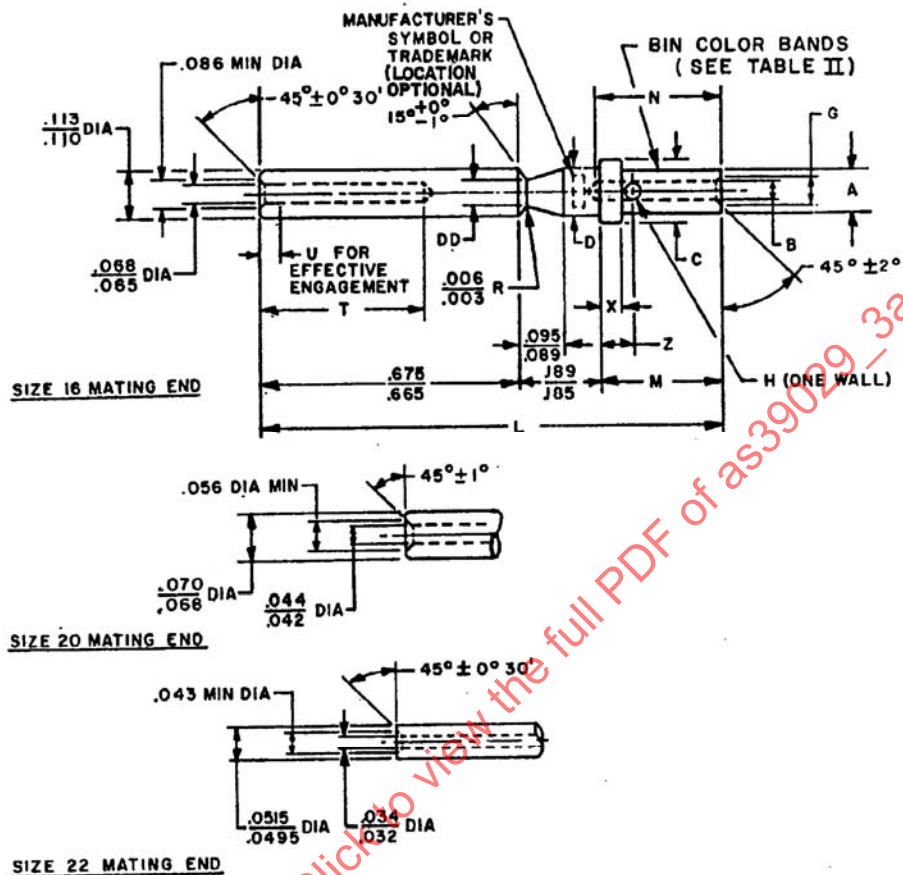

NOTES:

1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Metric equivalents are in parentheses for overall length and diameter only.
4. Dimensions shown apply after plating.

TABLE I. DIMENSIONS.

BIN code	A DIA	B DIA	C DIA	D DIA	G DIA	H DIA	L (REF)	M	N	T MIN	U MAX	X	Z	DD DIA
107	.051	.037	.081 (2.06)	.061	.047	.028	.917 (23.29)	.208	.191	.380	.041	.033	.059	.040
	.048	.035	.079 (2.01)	.059	.041	.026		.204	.160			.029	.053	.036
108	.078	.0500	.089 (2.26)	.070	.067	.032	1.063 (27.00)	.208	.191	.380	.041	.033	.063	.049
	.076	.0485	.087 (2.21)	.068	.061	.026		.204	.160			.029	.057	.045
109	.105	.068	.148 (3.76)	.113	.090	.042	1.153 (29.29)	.298	.281	.635	.060	.048	.079	.087
	.101	.066	.144 (3.66)	.110	.080	.036		.294	.250			.044	.073	.083

TABLE II. DESIGN CHARACTERISTICS.

BIN code	Color bands			Mating end size	Wire barrel size	Type	Class
	1st	2nd	3rd				
107	Brown	Black	Violet	22	22	A	A
108	Brown	Black	Gray	20	20		
109	Brown	Black	White	16	16		

TABLE III. TOOLS.

BIN code	Basic crimping tool	Positioner	Installing tool	Removal tool
107	M22520/2-01	M22520/2-11	---	---
108	M22520/2-01 or M22520/1-01	M22520/2-11 or M22520/1-02 Red	---	---
109	M22520/1-01	M22520/1-02 Blue	MS90455-1	MS90456-1

## REQUIREMENTS:

Dimensions, design characteristics, and configuration: See figure and tables I and II.

Tools: See table III.

Mating contact: MIL-C-39029/2.

QPL evaluating activity: Naval Weapons Support Center, Code 3074, Crane, Indiana 47522.

International interest: NEPR 57.