

REV.
A

AS39029/5

FEDERAL SUPPLY CLASS
5999

RATIONALE

REVISE TO INCLUDE COMMENTS RECEIVED BY THE GOVERNMENT AND INDUSTRY SINCE 1988, INCORPORATES VARIOUS AMENDMENTS, REMOVE GOVERNMENT JARGON AS A RESULT OF THE WORD-FOR-WORD TRANSFERENCE OF AS39029 TO SAE, UPDATE SPECIFICATION REFERENCES, ALIGN SPECIFICATIONS WITH SAE GUIDELINES AS NEEDED, AND REVIEW SPECIFICATIONS FOR KNOWN TECHNICAL PROBLEMS.

THE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE LATEST ISSUE OF: SAE AS39029.


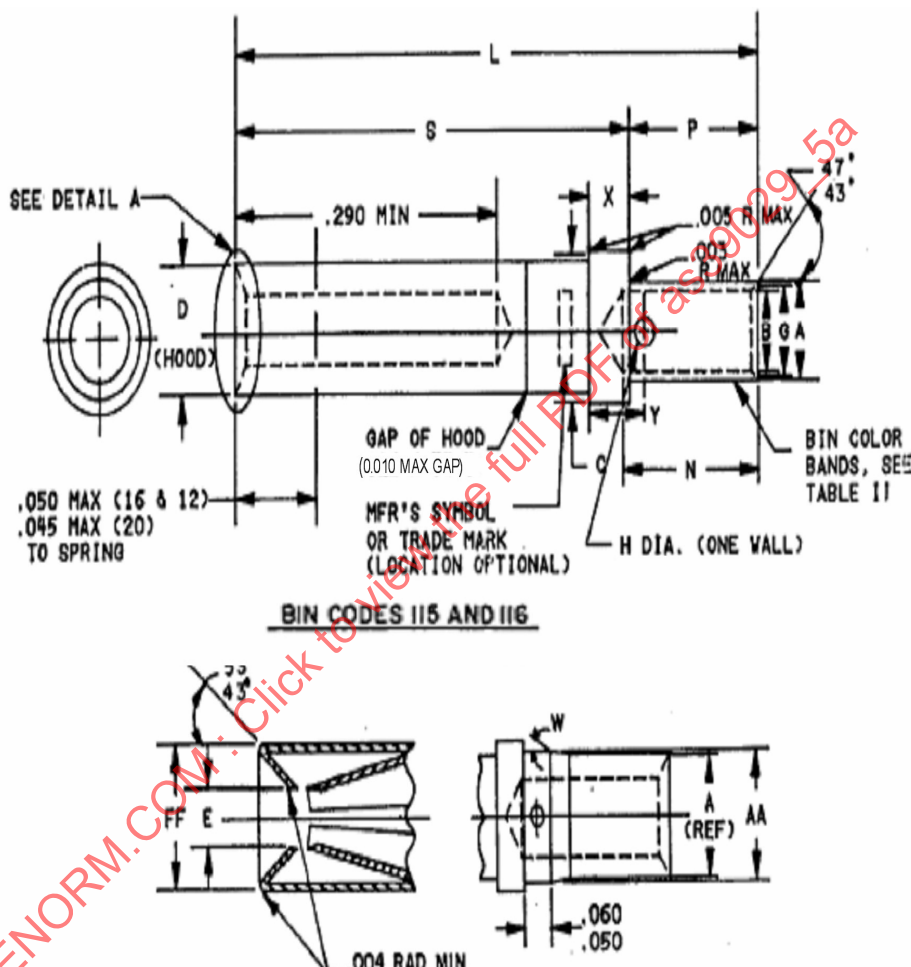


FIGURE 1 - AS39029/5 SOCKET CONTACT

THIRD ANGLE PROJECTION



CUSTODIAN: SAE AE-8/AE-8C1

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

CONTACTS, ELECTRICAL CONNECTOR, SOCKET, CRIMP REMOVABLE (FOR MIL-C-26482 SERIES 2, AS81703 SERIES 3, MIL-C-83723 SERIES I AND III, AND MIL-C-83733 CONNECTORS AND MIL-S-12883/40 AND /41 RELAY SOCKETS)

AS39029/5
SHEET 1 OF 3

**REV.
A**

Copyright 2006 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)
Email: custsvc@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 2001-03 REVISED 2006-08

TABLE 1 - CONTACT DIMENSIONS

BIN CODE	A DIA	B DIA	C DIA	D DIA	E MIN DIA	G DIA	H DIA	L MAX (REF)	N	P	S	W°	X	Y	AA	FF MIN DIA	WEIGHT (LB NOMINAL)	Q	R
115	.078 .076	.050 .048	.103 .100	.078 .076	.0415	.066 .056	.032 .026	.675	.187 .155	.171 .160	.485 .479	--	.033 .039	.068 .063	--	.060	.0007	.032 .026	.051 .026
116	.103 .101	.068 .066	.133 .130	.113 .110	.064	.092 .078	.042 .036	.759	.284 .250	.257 .246	.500 .494	--	.048 .044	.085 .068	--	.087	.0014	--	--
117	.078 .076	.050 .048	.133 .130	.113 .110	.064	.066 .056	.042 .036	.759	.284 .250	.257 .246	.500 .494	46 44	.048 .044	.085 .068	.103 .101	.087	--	--	--
118	.151 .148	.102 .098	.190 .187	.161 .158	.0955	.136 .116	.042 .036	.759	.284 .250	.257 .246	.500 .494	16 14	.048 .044	.085 .068	.158 .155	.125	.0028	--	--
119	.103 .101	.068 .066	.190 .187	.161 .158	.0955	.092 .078	.042 .036	.759	.284 .250	.257 .246	.500 .494	46 44	.048 .044	.085 .068	.158 .155	.125	--	--	--

TABLE 2 - MARKING AND DESIGN CHARACTERISTICS

Bin code	Color bands			Mating end size	Wire barrel size	Type	Class
	1st	2nd	3rd				
115	Brown	Brown	Green	20	20	A	B
116	Brown	Brown	Blue	16	16		
117	Brown	Brown	Violet	16	20		
118	Brown	Brown	Gray	12	12		
119	Brown	Brown	White	12	16		

TABLE 3 - TOOL REQUIREMENTS

BIN CODE	BASIC CRIMPING TOOL	POSITIONER	INSTALLING TOOL	REMOVAL TOOL	
				WIRED CONTACT	UNWIRED CONTACT
115	M22520/1-01 OR M22520/2-01 OR M22520/7-01	M22520/1-02 RED OR M22520/2-02 OR M22520/7-02	M81969/14-11 OR M81969/8-05	M81969/14-11 OR M81969/8-06	M81969/30-05
116	M22520/1-01 OR M22520/7-01	M22520/1-02 BLUE OR M22520/7-03	M81969/14-03 OR M91659/8-07	M81969/14-03 OR M81969/8-08	M81969/30-06
117	M22520/1-01 OR M22520/7-01	M22520/1-02 BLUE OR M22520/7-03	M81969/14-03 OR M81969/8-207	M81969/14-03 OR M81969/8-208	M81969/30-06
118	M22520/1-01	M22520/1-02 YELLOW	M81969/14-04 OR M81969/8-09	M81969/14-04 OR M81969/8-210	M81969/30-07
119	M22520/1-01	M22520/1-02 YELLOW	M81969/14-04 OR M81969/8-209	M81969/14-04 OR M81969/8-210	M81969/30-07