

REV. A


SAE AS39029/90

RATIONALE

FEDERAL SUPPLY CLASS
5935

REVISION IS REQUIRED TO RE-CLASSIFY DOCUMENT AS STABILIZED PER SAE GUIDELINES.

THE COMPLETE REQUIREMENTS FOR ACQUIRING THE CONTACT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION AND THE LATEST ISSUE OF MIL-C-39029.

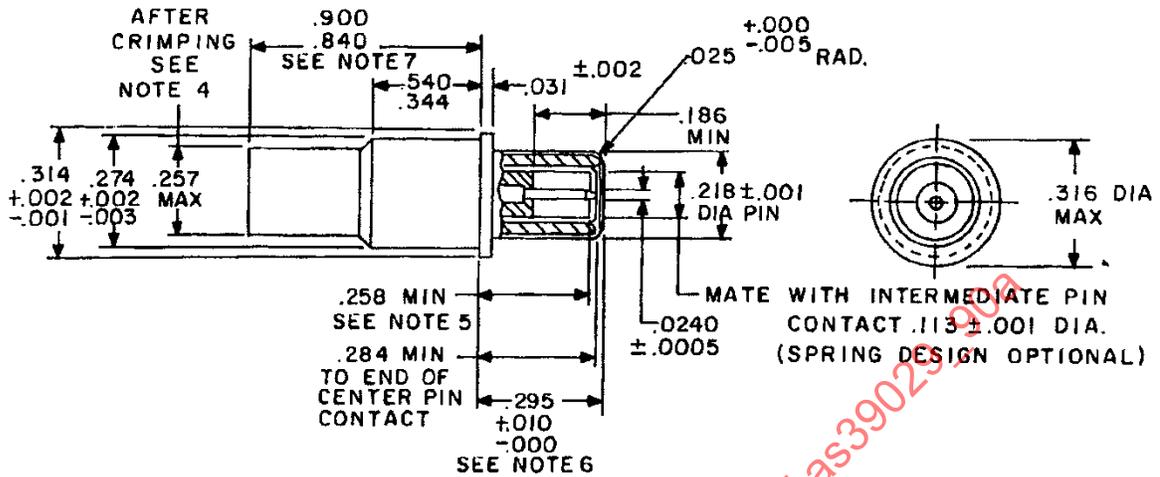


INCHES	MM	INCHES	MM	INCHES	MM
.0005	0.013	.113	2.87	.344	8.74
.001	0.03	.166	4.22	.540	13.72
.002	0.05	.171	4.34	.587	14.91
.003	0.08	.218	5.54	.622	15.80
.005	0.13	.257	6.53	.625	15.88
.006	0.15	.274	6.96	.647	16.43
.023	0.58	.286	7.26	.840	21.34
.0240	0.610	.314	7.98	.900	22.86
.031	0.79	.316	8.03		

NOTES

1. DIMENSIONS ARE IN INCHES.
2. METRIC EQUIVALENTS ARE GIVEN FOR GENERAL INFORMATION ONLY.
3. DIMENSIONS SHOWN APPLY AFTER PLATING.
4. DIAMETER SHALL NOT EXCEED .276 (7.01 MM) OVER RECOVERED HEAT SHRINK TUBING.
5. POINT AT WHICH A SQUARE ENDED PIN OF THE SAME BASIC DIAMETER AS THE MATING CONTACT FIRST ENGAGES THE INTERMEDIATE CONTACT SPRING. PROVISION FOR CLEARANCE HOLE SHALL BE PROVIDED FOR THE TEST PIN.
6. DIELECTRIC PROTRUSION SHALL NOT BE GREATER THAN .030".
7. MEASUREMENT SHALL BE TAKEN AFTER ASSEMBLY AND SHALL INCLUDE THE CRIMP FERRULE.

FIGURE 1 - CONCENTRIC TWINAX CONTACT

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS39029/90>



CUSTODIAN: AE-8/AE-8C1

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

CONTACT, ELECTRICAL CONNECTOR,
CONCENTRIC TWINAX, PIN, SIZE 8


SAE AS39029/90
SHEET 1 OF 6

REV. A

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, stabilized or cancelled. SAE invites your written comments and suggestions.


ISSUED 2001-03 STABILIZED 2012-01

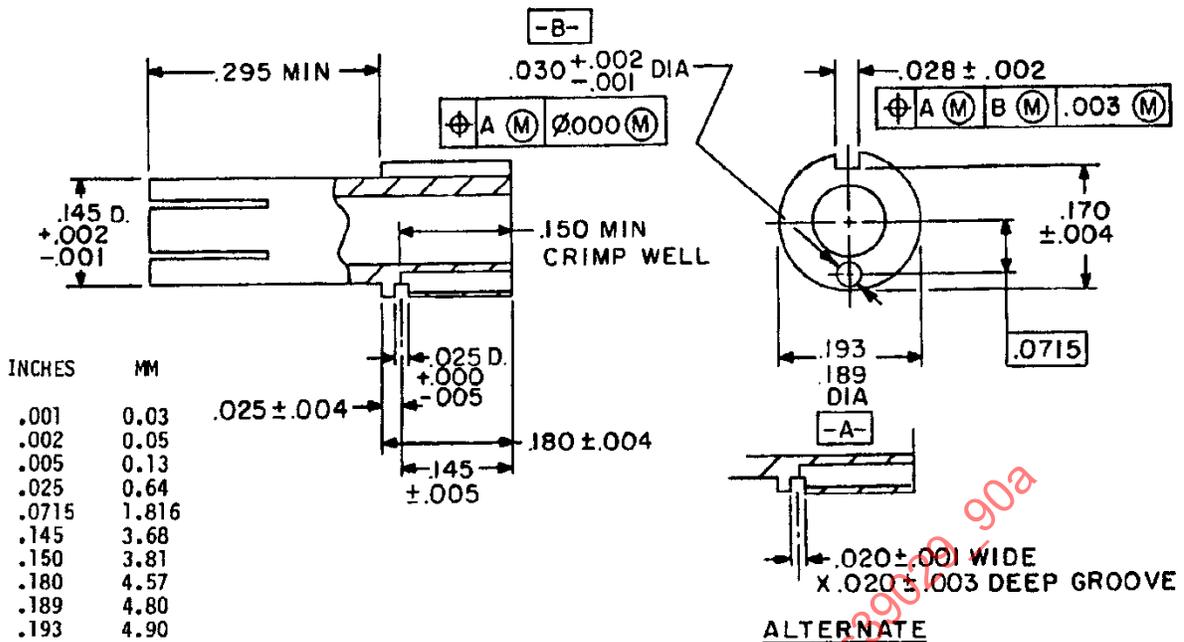

NOTES

1. DIMENSIONS ARE IN INCHES.
2. METRIC EQUIVALENTS ARE GIVEN FOR GENERAL INFORMATION ONLY.
3. DIMENSIONS SHOWN APPLY AFTER PLATING.

FIGURE 2 - INTERMEIDATE SOCKET CONTACT

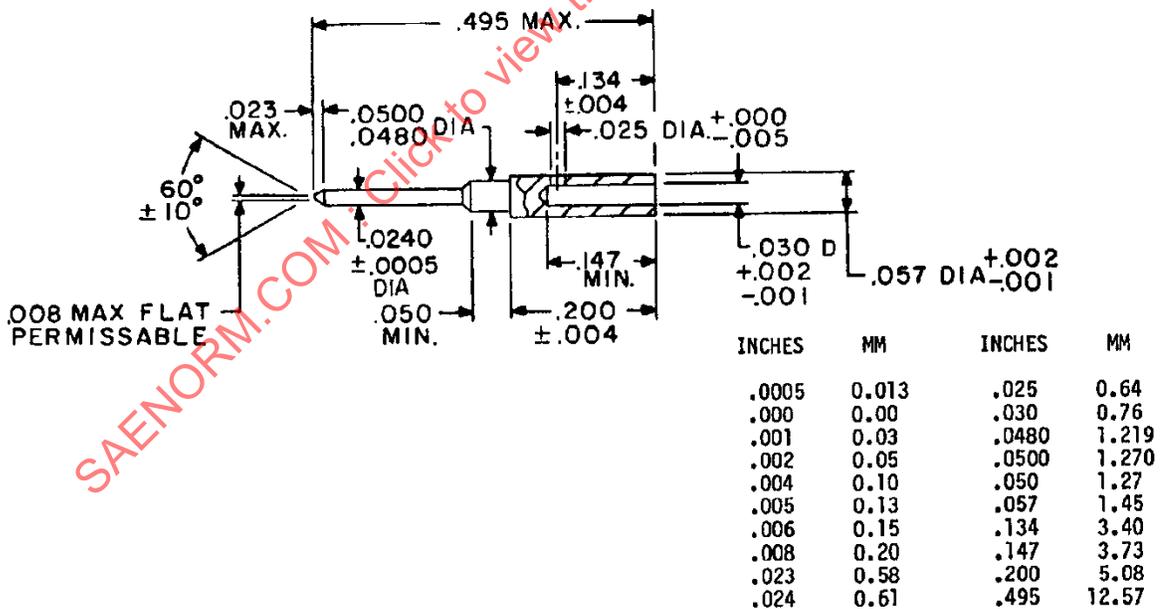


NOTES

1. DIMENSIONS ARE IN INCHES.
2. METRIC EQUIVALENTS ARE GIVEN FOR GENERAL INFORMATION ONLY.
3. DIMENSIONS SHOWN APPLY AFTER PLATING.

FIGURE 3 - CENTER PIN CONTACT

<p>SAE Aerospace An SAE International Group</p>	<p>AEROSPACE STANDARD</p>	<p>AS39029/90 SHEET 2 OF 6</p>	<p>REV. A</p>
	<p>CONTACT, ELECTRICAL CONNECTOR, CONCENTRIC TWINAX, PIN, SIZE 8</p>		

INCHES	MM
.00	0.
.010	0.25
.03	0.8
.15	3.8
.25	6.4
.56	14.2
.90	22.9

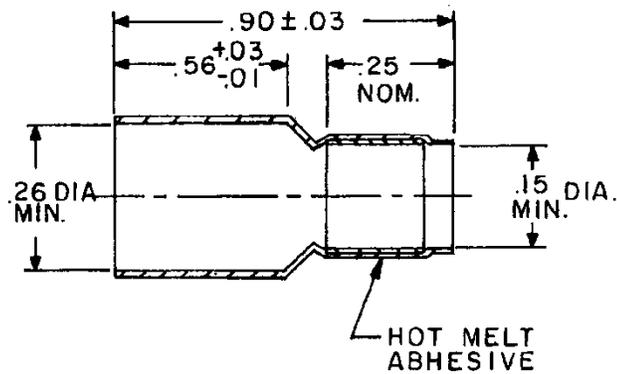

NOTES

1. DIMENSIONS ARE IN INCHES.
2. METRIC EQUIVALENTS ARE GIVEN FOR GENERAL INFORMATION ONLY.

FIGURE 4 - HEAT SHRINK BOOT

REQUIREMENTS:

1. QUALIFICATION: CONTACTS SHALL COMPLY WITH RELIABILITY ASSURANCE PROVISIONS OF MIL-STD-790 AS SPECIFIED IN MIL-C-38999.
2. DESIGN AND CONSTRUCTION:

DIMENSIONS AND CONFIGURATION: SEE FIGURES 1 THROUGH 4 AND TABLE 1.

TABLE 1 - DESIGN CHARACTERISTICS

BIN CODE	COLOR BANDS			CONTACT CAVITY SIZE	CABLE ACCOMMODATED	TYPE	CLASS
	1ST	2ND	3RD				
529	GREEN	RED	WHITE	8	M17/176-00002	D	B

ASSEMBLY PROCEDURE: MANUFACTURER'S RECOMMENDED ASSEMBLY INSTRUCTIONS SHALL BE SHIPPED WITH UNIT PACKAGE.

3. MATERIAL:

HEAT SHRINK BOOT: SHALL BE IN ACCORDANCE WITH MIL-I-23053/8.

4. ELECTRICAL:

LOW SIGNAL LEVEL CONTACT RESISTANCE (CENTER AND INTERMEDIATE CONTACTS ONLY): SEE TABLE 2.

CONTACT RESISTANCE: SEE TABLE 3.

FREQUENCY: 0 TO 20 MHZ (OPERATING FREQUENCY RANGE).

VOLTAGE RATING: 500 VOLTS RMS MAXIMUM; WORKING VOLTAGE AT SEA LEVEL, 125 VOLTS RMS MAXIMUM AT 70 000 FEET.

 An SAE International Group	AEROSPACE STANDARD	 AS39029/90 SHEET 3 OF 6	REV. A
	CONTACT, ELECTRICAL CONNECTOR, CONCENTRIC TWINAX, PIN, SIZE 8		

TABLE 2 - LOW SIGNAL LEVEL CONTACT RESISTANCE (CENTER AND INTERMEDIATE CONTACTS ONLY)

BIN CODE	CABLE ACCOMMODATED	MAXIMUM CONTACT RESISTANCE (MILLIOHMS)	
		INITIAL	AFTER CONDITIONING
529	M17/176-00002	55	66

TABLE 3 - CONTACT RESISTANCE

BIN CODE	CONTACT	CABLE ACCOMMODATED	TEST CURRENT (AMPERES)	MAXIMUM VOLTAGE DROP (MILLIVOLTS)		
				25 °C, +3 °C, -0 °C		+175 °C, +3 °C, -0 °C
				INITIAL	AFTER CONDITIONING	AFTER CONDITIONING
529	CENTER	M17/176-00002	1.0	55	66	94
529	INTERMEDIATE	M17/176-00002	1.0	55	66	94
529	OUTER	M17/176-00002	12.0	75	90	128

DIELECTRIC WITHSTANDING VOLTAGE: SHALL BE AS SPECIFIED IN TABLE 4.

TABLE 4 - DIELECTRIC WITHSTANDING VOLTAGE

CONTACTS	ALTITUDE	TEST VOLTAGES AC RMS
CENTER TO INTERMEDIATE	SEA LEVEL	1000
INTERMEDIATE TO OUTER	SEA LEVEL	500

MATING CONTACT: SHALL BE IN ACCORDANCE WITH MIL-C-39039/91.

5. MECHANICAL:

CONTACT ENGAGEMENT AND SEPARATION FORCE (SOCKET CONTACTS ONLY): THE ENGAGEMENT DEPTH SHALL BE A MINIMUM OF 0.7 OF THE MINIMUM SOCKET BORED. THE TEST PINS SHALL BE IN ACCORDANCE WITH MS3197, EXCEPT THE DIAMETERS SHALL BE AS SPECIFIED IN TABLE 5. PROVISION FOR CLEARANCE HOLE ON OUTER CONTACT. TEST PINS SHALL BE PROVIDED. THE TEST PINS SHALL BE IN ACCORDANCE WITH MS3197, EXCEPT THE DIAMETERS SHALL BE AS SPECIFIED IN TABLE 5.

TABLE 5 - CONTACT ENGAGEMENT AND SEPARATION FORCE

TEST PIN DIAMETER (INCH)	MINIMUM SEPARATION FORCE (OUNCES)		MAXIMUM ENGAGEMENT FORCE (OUNCES)		MAXIMUM AVERAGE ENGAGEMENT FORCE
	INITIAL	AFTER CONDITIONING	INITIAL	AFTER CONDITIONING	
.1140 +.0000 -.0001	NA	NA	18	22	NA
.1120 +.0001 -.0000	0.5	0.4	NA	NA	NA

CRIMP TENSILE STRENGTH (CENTER, INTERMEDIATE, AND OUTER CONTACT CRIMP JOINT): SEE TABLE 6.

TABLE 6 - CRIMP TENSILE STRENGTH (AT AMBIENT)

BIN CODE	CABLE ACCOMMODATED	AXIAL LOAD (POUNDS, MINIMUM)		
		CENTER CONTACT	INTERMEDIATE CONTACT	OUTER CONTACT
529	M17/176-00002	8	8	25

 An SAE International Group	AEROSPACE STANDARD	 AS39029/90 SHEET 4 OF 6	REV. A
	CONTACT, ELECTRICAL CONNECTOR, CONCENTRIC TWINAX, PIN, SIZE 8		