

Brake Systems, Wheel, Aircraft, Design of

RATIONALE

This document has been reaffirmed to comply with the SAE 5-Year Review policy.

NOTICE

This document has been taken directly from U.S. Military Specification MIL-B-8584C and contains only minor editorial and format changes required to bring it into conformance with the publishing requirements of SAE technical standards. The initial release of this document is intended to replace MIL-B-8584C. Any part numbers established by the original specification remain unchanged.

The original Military Specification was adopted as an SAE standard under the provisions of the SAE Technical Standards Board (TSB) Rules and Regulations (TSB 001) pertaining to accelerated adoption of government specifications and standards. TSB rules provide for (a) the publication of portions of unrevised government specifications and standards without consensus voting at the SAE Committee level, and (b) the use of the existing government specification or standard format.

Under Department of Defense policies and procedures, any qualification requirements and associated qualified products lists are mandatory for DOD contracts. Any requirement relating to qualified products lists (QPL's) has not been adopted by SAE and is not part of this SAE technical document.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2007 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Tel: 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: CustomerService@sae.org

SAE WEB ADDRESS:

<http://www.sae.org>

SAE AS8584

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE:

1.1 Scope:

This specification covers the brake system design requirements for aircraft equipped with wheel-type landing gear.

1.1 Classification:

The brake systems shall be either hydraulic or pneumatic; manually operated, power operated, manual-power operated; and shall be of the following types:

Type I - Manual pressure generating: The control unit generates pressure by manual actuation.

Type II - Power pressure generating: The control unit meters pressure from a power generating system.

Type III - Manual power pressure generating: Pressure is manually generated in a slave control unit which in turn operates the main control unit which meters fluid from a pressure generating system.

Type IV - Power-boosted manual pressure generating: The control unit generates pressure by manual actuation and, in addition, the manually generated pressure is boosted by pressure from a power generating system.

Type V - Power brake valve with emergency master cylinder: One part of the control unit meters pressure from a power generating system, and another part of the control unit serves as a standby manual pressure generating unit when the power system is inoperative.

SAE AS8584

2. APPLICABLE DOCUMENTS:

- 2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Military

MIL-T-781	Terminal; Wire Rope, Swaging
MIL-W-5013	Wheel and Brake Assemblies: Aircraft
MIL-W-5424	Wire Rope, Steel, (Corrosion Resisting) Flexible, Preformed (For Aeronautical Use)
MIL-H-5440	Hydraulic Systems, Aircraft, Types I and II, Design, Installation, and Data Requirements for
MIL-P-5518	Pneumatic Systems, Aircraft; Design, Installation, and Data Requirements for
MIL-V-5525	Valves, Aircraft Power Brake
MIL-C-6026	Control Unit, Pressure Generating, Manually Operated, Aircraft Hydraulic Brake System
MIL-P-7034	Pulleys, Groove, Antifriction-Bearing, Grease-Lubricated, Aircraft
MIL-S-7742	Screw Threads, Standard, Optimum Selected Series: General Specification for
MIL-C-7979	Cylinders; Hydraulic Brake, Master, Power Assisted
MIL-B-8075	Brake Control Systems, Antiskid, Aircraft Wheels; Instructions for Preparation of Specifications for
MIL-H-8775	Hydraulic System Components, Aircraft and Missiles, General Specification for
MIL-H-8794	Hose, Rubber, Hydraulic, Fuel and Oil Resistant
MIL-H-8891	Hydraulic Systems, Manned Flight Vehicles, Type III, Design, Installation, and Data Requirements for
MIL-F-9490	Flight Control Systems - Design, Installation and Test of, Piloted Aircraft, General Specification for
MIL-F-18372	Flight Control Systems, Design, Installation and Test of, Aircraft (General Specification for)
MIL-C-25427	Coupling Assembly, Hydraulic, Self-Sealing, Quick Disconnect

STANDARDS

Military

MIL-STD-203	Aircrew Station Controls and Displays for Fixed Wing Aircraft
MIL-STD-250	Aircrew Station Controls and Displays for Rotary Wing Aircraft
MS33540	Safety Wiring and Cotter Pinning, General practices for

SAE AS8584

2.1 (Continued):

Air Force-Navy Aeronautical

AN6204 Valve, Hydraulic Bleeder

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS:

3.1 General requirements:

The brake systems covered by this specification shall be operable under all conditions of weather and compatible with the type (temperature range) and class (pressure limits) of hydraulic or pneumatic systems as specified in MIL-H-5440, MIL-P-5518, or MIL-H-8891, whichever is applicable.

3.2 Selection of materials:

Specifications and standards for all materials, parts, and Government certification and approval of processes and equipment, which are not specifically designated herein and which are necessary for the execution of this specification, shall be selected in accordance with procedures established by the procuring activity, except as provided in the following paragraph.


3.2.1 Standard parts: Standard parts (MS or AN) shall be used wherever they are suitable for the purpose and shall be identified on the drawing by their part numbers. In the event there is no suitable corresponding standard part in effect on date of invitation for bids, commercial parts may be used provided they conform to all requirements of this specification and more than one source is available for replacement.

3.3 Design:

The design and installation of aircraft braking systems shall be in accordance with the applicable requirements of MIL-H-5440, MIL-P-5518, MIL-H-8775, MIL-H-8891, or MIL-F-18372 and MIL-F-9490 and shall employ to the fullest possible extent the standard components listed therein. Type IV brake systems shall be used on all carrier-based aircraft for which the Type I system would be inadequate to hold the aircraft on a 10 degree slope at maximum design gross weight. A Type II brake system may be used for carrier-based aircraft which have an antiskid control system. Where Type I or Type IV manual systems alone will not meet the 10 degree slope requirements, a Type II, III, or V system shall be used, but special provisions shall be incorporated to hold the aircraft on the 10 degree slope without the use of normal power-generating systems. All detachable components and parts shall be safetied in accordance with MS33540 or secured by an approved method that will prevent loosening.

SAE AS8584

- 3.3.1 Wheels and brakes: Wheel and brake assemblies shall conform to the requirements of MIL-W-5013 and the applicable standards.
- 3.3.2 Normal brake controls: Right and left brakes shall be separately actuated and shall be so designed that they can be applied by toe force on brake pedals on the rudder controls except for bicycle gear or quadricycle gear, where other suitable brake controls may be used subject to approval of the procuring activity. Pedal location shall conform to the requirements of MIL-STD-203 or MIL-STD-250, as applicable. The brake pedal linkages shall be so designed that a comfortable angle of approximately 90 degrees between the pilot's foot and his lower leg is maintained throughout the full range of movement of the rudder pedals and seat. Strength shall be provided in the brake pedal and associated linkage to withstand 300 pounds applied at the tip of the pedal with no yielding. The desired shape and travel of the brake pedals and the brake control device shall be as free as possible of friction and lost motion (see figures 1 and 2). Means shall be provided to positively return the brake pedals to the off position when toe force is removed from the pedals. No pumping shall be allowed in order to meet the deceleration and parking requirements.

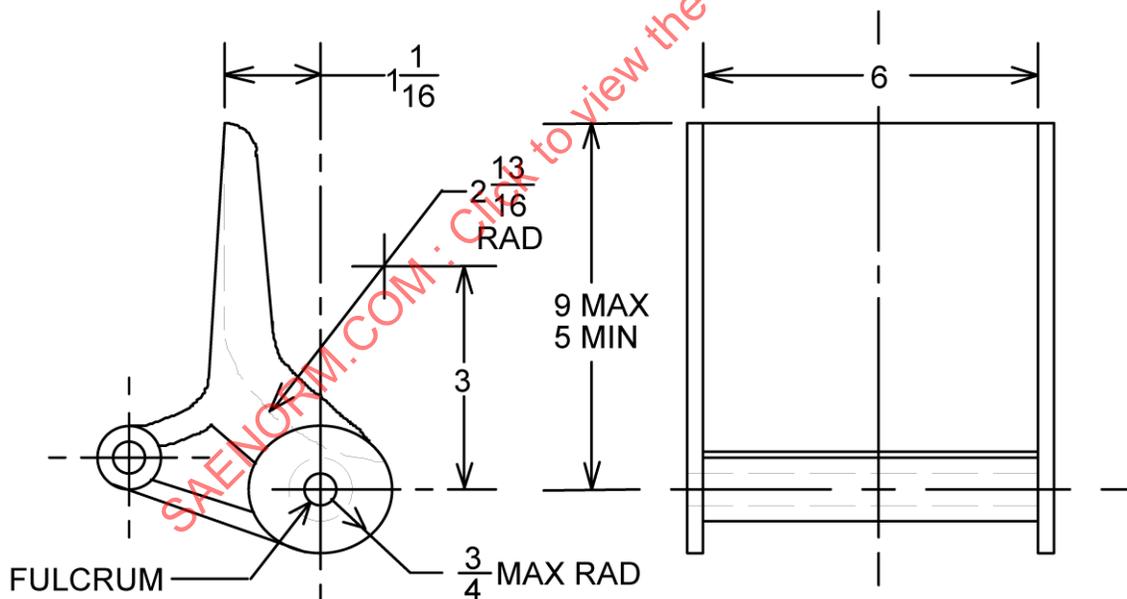

DIMENSIONS IN INCHES

FIGURE 1. Brake Pedal Shape

SAE AS8584

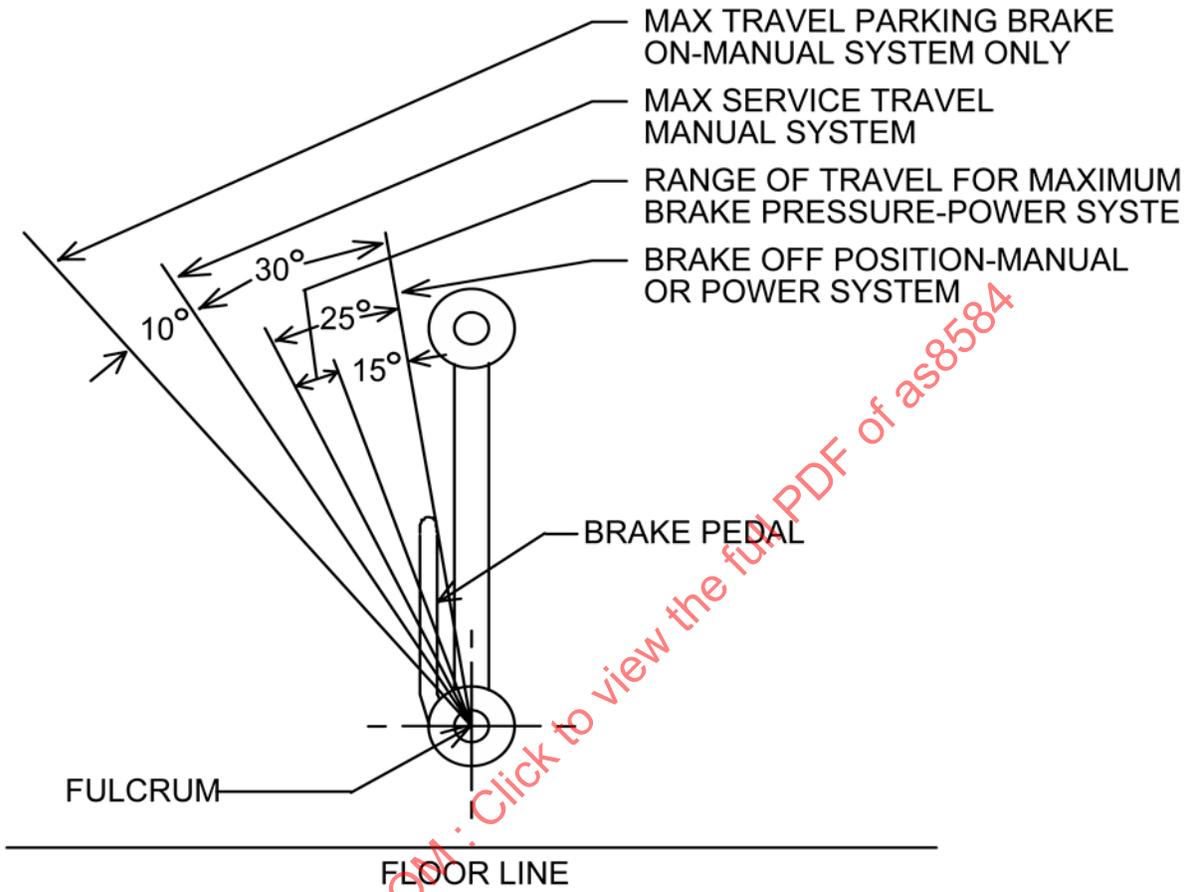


FIGURE 2. Brake Pedal Travel

SAE AS8584

- 3.3.2.1 Manually operated systems, Type I: Manual hydraulic braking control systems shall incorporate a brake control unit or units which shall conform to MIL-C-6026. The total displacement of the control unit shall be at least 25 percent greater than the maximum displacement, including line expansion, required to hold the wheels locked against a 33 degree slope for aircraft at maximum design gross weight and a 20 degree slope for helicopters at design alternate gross weight. The control unit shall preferably be connected directly to the brake pedal lever. The compressible medium of the temperature compensating device in the control unit shall be designed with a minimum preload of 50 percent and a minimum bottoming load of 125 percent of the parking pressure required to hold aircraft on an 18 degree slope at maximum design gross weight and to hold helicopters on a 10 degree slope at design alternate gross weight. This device shall have fluid displacement equivalent to the change in volume of the fluid in the brake system, neglecting the reservoir, under a temperature change of 44.4 degrees Celsius (112 degrees Fahrenheit). Manual braking control systems shall be such that:
- (a) A foot force of between 15 and 20 pounds at the tip of the pedal shall be required to cause initial movement of the brake pedal.
 - (b) A foot force of between 75 and 125 pounds at the tip of the pedal shall develop the torque required on the landplane landing design gross weight or at design alternate gross weight brake stop conditions of the table entitled "Wheel Brake Capacity Requirements" of MIL-W-5013. The brake pressure thus obtained shall be consistent with the average of the repeated dynamometer tests of the brake in the landplane landing design gross weight condition or at design alternate gross weight.
 - (c) The travel of the pedal for full brake application shall be as indicated on figure 2. It shall not exceed 30 degrees while meeting the requirements of subparagraph (b) above.
 - (d) In all positions of the brake pedal or the rudder linkage and the seat, it shall be possible for the pilot to apply sufficient static brake torque to hold the wheels locked against a 33 degree slope for aircraft at maximum design gross weight and a 20 degree slope for helicopters at design alternate gross weight. It shall be possible to meet this requirement with the brakes at a temperature of 21 degrees Celsius (70 degrees Fahrenheit).
- 3.3.2.2 Power-operated systems, Types II and III: Power-operated brake control systems shall exhibit no objectionable time lag between pedal movement and brake response. Such systems shall develop "feel" at the pedals, in proportion to the amount of energizing force applied to the brake. Hydraulic power brake valves shall conform to MIL-V-5525. The normal brake system, including accumulators if used, shall be designed to prevent depletion of brake pressure supply due to pilot operation during normal landing run or ground handling of the aircraft. Consideration should be given to appropriate hydraulic pump operating speeds.

SAE AS8584

3.3.2.2.1 Power braking systems shall be such that:

- (a) A foot force of between 15 and 20 pounds at the tip of the pedal shall be required to cause initial metering through the power brake valve.
- (b) A foot force of between 75 and 125 pounds at the tip of the pedal shall develop the torque required on the landplane landing design gross weight or at design alternate gross weight brake stop conditions of the table entitled "Wheel Brake Capacity Requirements" of MIL-W-5013. The brake pressure thus obtained shall be consistent with the average of the repeated dynamometer tests of the brake in the landplane landing design gross weight condition or at design alternate gross weight.
- (c) Brake pressure sufficient to hold the wheels locked shall be available at the upper ranges of travel of the brake pedal or rudder linkage and the seat to hold against a 33 degree slope for aircraft at maximum design gross weight and a 20 degree slope for helicopters at design alternate gross weight. It shall be possible to meet this condition with the brakes at a temperature of 21 degree Celsius (70 degrees Fahrenheit).
- (d) The travel of the pedals shall be as shown on figure 2. It shall be between 15 degrees and 25 degrees to produce the maximum available brake pressure.

3.3.2.3 Control of carrier-based aircraft, Types II, IV, and V systems: On those carrier-based aircraft where power brake systems are required, the brake control shall conform to MIL-C-7979, as applicable. With the power system operative, the brakes shall meet the requirement for power-operated systems. With the power system inoperative, the system shall meet the requirements for manually operated systems, except the deceleration capability at 175 pounds maximum foot force shall be consistent with the aircraft operational requirements as approved by the procuring activity. For helicopters, 175 pounds maximum foot force shall produce a 5 foot per second per second deceleration at basic design gross weight. The braking capacity must be adequate for a minimum aircraft braking coefficient of friction of 0.2.

SAE AS8584

- 3.3.3 Emergency brake control system: All aircraft using Types II and III brake systems shall be provided with an emergency brake system capable of decelerating the aircraft under the conditions specified in 3.3.2.2.1(b). If an emergency hydraulic system is used, metered differential brake control shall be provided. The emergency system shall be completely independent of the normal system up to the shuttle valve or equivalent unit at the brake. A system wherein a failure of one-half of the normal system still allows the specified decelerations with differential control is considered equivalent to a separate emergency system. When accumulators or air bottles are used for the emergency braking, they shall have sufficient capacity to provide at least 10 full brake applications, assuming brakes are adjusted to recommended clearances, and of which the last shall provide a coefficient of 0.18 minimum between tire and runway recommended clearances. The volume of hydraulic fluid required should be based on pressures and displacements required to meet the specified deceleration applications considering three of the applications are with cold brakes and seven are with hot brakes. If air bottles are used for the emergency system, the lines between the air bottle control valve and the shuttle valve shall be automatically vented to the atmosphere when not in use. Whenever feasible, emergency brake systems shall function by continued pressure on the brake pedal. Emergency systems shall be designed to facilitate operational checks. The emergency brake system shall be designed to preclude entrapment of the normal system fluid within any of the components which could prevent the brake system from going onto an emergency mode.
- 3.3.4 General design requirements:
- 3.3.4.1 Parking brake: Brake systems on all aircraft shall be provided with a parking brake control located and actuated in accordance with MIL-STD-203 and MIL-STD-250, as applicable, except that the parking lock may be omitted from jet-powered interceptors, jet-powered fighters, and carrier-based aircraft. The parking mechanism shall provide sufficient pressure in the brake system to develop a torque to hold on an 18 degree slope for aircraft at maximum design gross weight and a 10 degree slope for helicopters at a design alternate gross weight. The parking lock system shall include means to compensate for predicted leakage and temperature variations so that at least 75 percent of the parking brake torque defined above is maintained over a minimum period of 1 hour with engines off and a 40 degree Fahrenheit drop in temperature. A 40 degree increase above the initial parking temperature shall not result in excessive pressure in the brake system.
- 3.3.4.2 Operating media: Brakes shall be designed for use with the operating medium mutually determined by the procuring activities and the aircraft manufacturer for the particular application (hydraulic, pneumatic, mechanical).
- 3.3.4.3 Brake lines: Brake lines shall be routed to facilitate proper bleeding. Traps or bends in hydraulic lines which might cause air pockets shall be avoided. Wherever practical, the lines shall have a continuous drop from the brake valve or control unit to the brakes. If traps or bends cannot be avoided, then a separate AN6204, or equivalent, bleeder valve shall be installed to accomplish proper bleeding in accordance with MIL-H-5440.