

Self-Propelled Sweepers and Scrubbers Dual Position Driving Controls and Displays

1. Scope—This SAE standard applies to self-propelled driver operated sweepers and scrubbers as defined in SAE J2130.

1.1 Purpose—The purpose of this document is to establish the basic requirements associated with controls and displays for dual position driving controls as depicted in a typical installation shown in Figure 1. The control layout illustrated being of a conventional installation as associated with a normal on-road vehicle having a steering wheel to steer the machine and foot pedals to control the speed and braking functions. The document elaborates the requirements for an originally built machine with two driving positions but also where a proprietary commercial truck chassis is converted from a single driving position, it also advises recommendations in design, construction and safety related elements.

In the case where National Regulations pertain to the design and performance of driving control systems as depicted, then these regulations take precedent over the recommendations in this document.

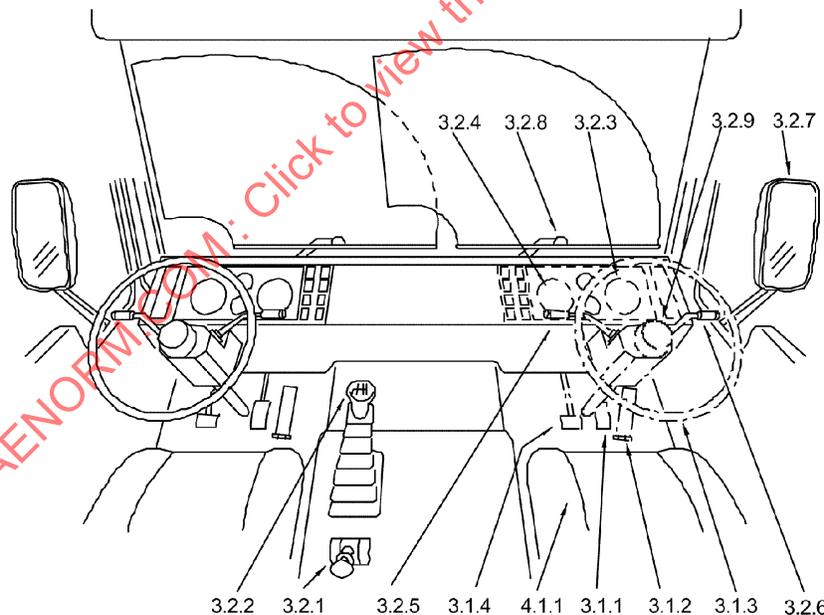


FIGURE 1—TYPICAL LAYOUT OF SYSTEM

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2007 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER:

Tel: 877-606-7323 (inside USA and Canada)
Tel: 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: CustomerService@sae.org
http://www.sae.org

SAE WEB ADDRESS:

SAE J1791 Reaffirmed APR2007

1.2 Rationale—This document has been reaffirmed to comply with the SAE 5-Year Review policy.

2. References

2.1 Applicable Publications—The following standards form a part of the specification to the extent specified herein. Unless otherwise indicated, the latest revision of the publications shall apply.

2.1.1 SAE PUBLICATIONS—Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or 724-776-4970 (outside USA), www.sae.org.

SAE J287—Driver hand Control Reach

SAE J680—Location and Operation of Instruments and Controls in Motor Truck Cabs

SAE J898—Control Locations for Off-Road Work Machines

SAE J1050—Describing and Measuring the Driver's Field of View

SAE J1517—Driver Selected Seat Position

SAE J2130—Self-Propelled Sweepers

2.2 Related Publication—The following publication is provided for information purposes only and is not a required part of this specification.

2.2.1 SAE PUBLICATION—Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or 724-776-4970 (outside USA), www.sae.org.

SAE J1521—Truck Driver Shift-Knee Position for Clutch and Accelerator

3. Definitions

3.1 Primary Controls—Are the controls principally used to operate, control and drive the machine safely, these include:

3.1.1 SERVICE BRAKE—A system to arrest, hold and bring the machine to a stop. Actuation is by a foot pedal control located in the normal position for an automotive application. The service brake may be pneumatic, hydraulic or hydrostatically operated, or a combination of systems.

3.1.2 ACCELERATOR—A system to regulate the engine speed and/or the machine's ground speed by means of a foot pedal located in the normal position for an automotive application.

3.1.3 STEERING SYSTEM—A system that controls the direction of the machine by means of a steering wheel and associated linkage, with or without power assistance.

3.1.4 CLUTCH—A system for disconnecting the engine from the drivetrain by means of a foot pedal located in the normal position for an automotive application.

3.2 Secondary Controls, Displays, and Systems—Are controls and systems that are operated or observed intermittently in order to conduct specific functions during the control of the machine, these include:

3.2.1 PARKING BRAKE—A system to prevent the machine from moving when unattended.

3.2.2 GEAR SHIFT—A system to engage or disengage a train of gears or other propulsion transmission

3.2.3 SPEEDOMETER—A device to visually indicate the machine's ground speed.

3.2.4 DISPLAYS AND SYMBOLS

- a. Displays: a system for indicating the operational status of the machine's vehicular functions and systems.
- b. Symbols: a method of identifying a control device and its function.

3.2.5 LIGHTING CONTROL—Control system for the operation of all mandatory lamps.

3.2.6 TURN INDICATOR—A device to control an external visual indicator to show the driver's intention to turn.

3.2.7 REARVIEW MIRRORS—System to enable the operator to observe rearwards.

3.2.8 WIPER SYSTEM—Mechanism for cleaning the windscreen of rain, snow, mist, etc.

3.2.9 HORN—Audible warning device operated by the driver to warn of presence to others in hearing range.

3.3 Components

3.3.1 LOCKING FASTENER—Screw fasteners and similar components that embody a torque prevailing friction element used to join, attach and secure machine components.

3.3.2 CABLES—Flexible mechanical linkages contained in a routing conduit.

3.3.3 BRAKE CONTROL VALVES—Components used to regulate the braking forces in a braking system.

3.3.4 MIRRORS—Components displaying a reflected mirrored visual image.

4. Technical Requirements

4.1 Control Layout, Construction, and Safety Requirements

4.1.1 Driver seating position and foot pedal arrangements shall observe the requirements of - SAE J1517, SAE J898.

4.1.2 Driver hand control reach shall observe the requirements of – SAE J287, SAE J898.

4.1.3 Location of all controls and displays shall observe the requirements of – SAE J898, SAE J680.

4.1.4 Location of mirrors shall observe the requirements of SAE J1050.

4.2 Control System Functionality

4.2.1 All primary controls, shall be duplicated for both driving positions and function at all times, although in the case of duplicated power steering systems and electronic accelerator pedals, it is permissible to disable the redundant driving position.

4.2.2 All secondary controls and displays, may be of an un-duplicated format. But, where the requirements of 4.1 are breached, requiring an unnatural driving posture to operate a control or observe a display, then the system shall be duplicated for both left and right hand driving positions.

4.2.3 SLAVE AND MECHANICAL SYSTEMS

4.2.3.1 The steering system shall utilize one chassis frame-mounted steering gear controlled by two interconnected mechanical systems that provide steering control from either driving position.